

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_

# Thinline X 60


## Suspended

Direct | Direct-Indirect

Architectural luminaire. 60° X Shaped light fixture. Pendant mounting. Direct and direct-indirect distribution options. Available in 3 sizes. 2.25" wide. Multiple finishes.

cULus Listed

Designed and manufactured in North America. 5 Year Warranty.

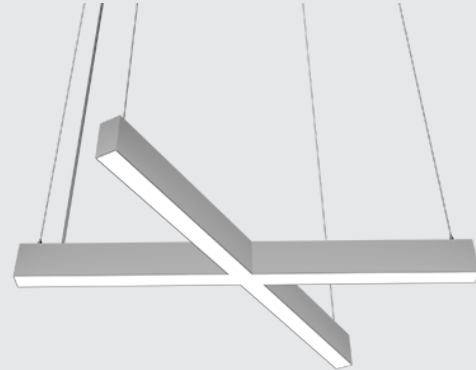

### Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



### Ordering Options

Sample Configuration: DTL X 60 - 4FT x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

| Model    | Size   | Direct Lm/ft         | Indirect Lm/ft       | CRI                  | Color Temp           | Voltage              | Direct Lens             |
|----------|--|----------------------|----------------------|----------------------|----------------------|----------------------|-------------------------|
| DTL X 60 | 4 x 2FT  | D 250                | I 250                | 80                   | 27K 2700K            | U 120/277V           | FR Frosted Flat         |
|          | 4 x 3FT  | D 500                | I 500                | 90                   | 3K 3000K             | H 347V               | FRREG Frosted Regressed |
|          | 4 x 4FT  | D 750                | I 750                |                      | 35K 3500K            |                      |                         |
|          |  | D 1000               | I 1000               |                      | 4K 4000K             |                      |                         |
|          |  | D _____              | I _____              |                      | 5K 5000K             |                      |                         |
|          | -Custom Sizes Available - Please Consult Factory | (custom up to 1200)  | (custom up to 1200)  |                      |                      |                      |                         |
| DTL X 60 | <input type="text"/>                             | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/>    |

| Indirect Lens                                | Finish   | Mounting                          | Driver   | Controls   |
|--|--|-----------------------------------|--|--|
| FR Frosted<br>BATWING Batwing                | WH White<br>BLK Black<br>GRY Grey<br>CU Custom | AC Aircraft Cable<br>10' Standard | DIMOFF 0-10V DIMOFF<br><i>Optional</i><br>DALI<br>LUTRON<br>SR Philips SR<br>ELDO .1% ELDO<br>(347 only 1-10 5%) | N None<br><i>Optional</i><br>DMX<br>SNS Philips SNS 300 w/BLD & Daylight<br>CLM Encelium CLM<br>LG LG Dongle<br>BT Bluetooth Mesh<br>EN Enlighted Integral |
| <i>Indirect Lens: Minimum size 4FT x 2FT</i> |  |                                   |  |  |
| <input type="text"/>                         | <input type="text"/>                           | AC                                | <input type="text"/>   | <input type="text"/>   |

| Circuits                    | Accessories   | Wiring  | Wire Color  | Wire Length                  | Canopy Color  |
|-----------------------------|---|---|---|------------------------------|---|
| 1 1 Circuit<br>2 2 Circuits | N None<br><i>Optional</i><br>10kV 10kV Surge Protection<br>EM Emergency Battery<br>+GTD Generator Transfer Device | 5 WIRE 5 Wire(std)<br><i>Optional</i><br>N 5 Leads<br>6 WIRE 6 Wire - Cable (EM - emergency battery option) | CL Clear<br><i>Optional</i><br>B Black<br>W White | Length(Ft)<br>- 6Ft Standard | WH White<br>BLK Black<br>CU Custom<br><br>- Consult factory for custom finishes |
| <input type="text"/>        | <input type="text"/>  | <input type="text"/>  | <input type="text"/>                              | <input type="text"/>         | <input type="text"/>  |

**LED**

L90>70,000

Samsung 301 2 McAdam Binning

4000K 120 Lm/W


3500K 98%

3000K 96%


90 CRI 85%

**Lens Options - Direct Distribution**


**Lens Options - Indirect Distribution**




Standard  
Frosted Flat



Frosted  
0.25" Regressed




Standard  
Frosted




Batwing


**Dimensions**

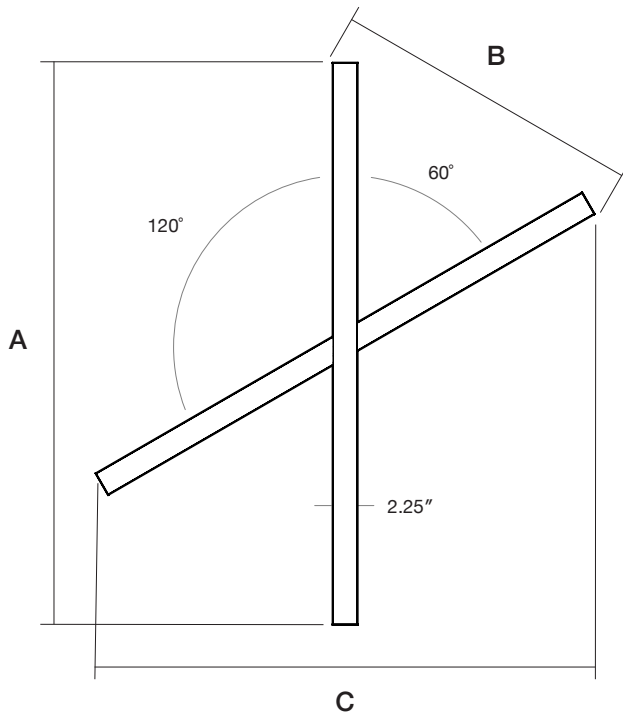

| Model   | A      | B      | C      |
|---------|--------|--------|--------|
| 4 x 2FT | 48.71" | 26.27" | 43.28" |
| 4 x 3FT | 72.71" | 37.27" | 64.06" |
| 4 x 4FT | 96.71" | 50.27" | 84.85" |



Mounting

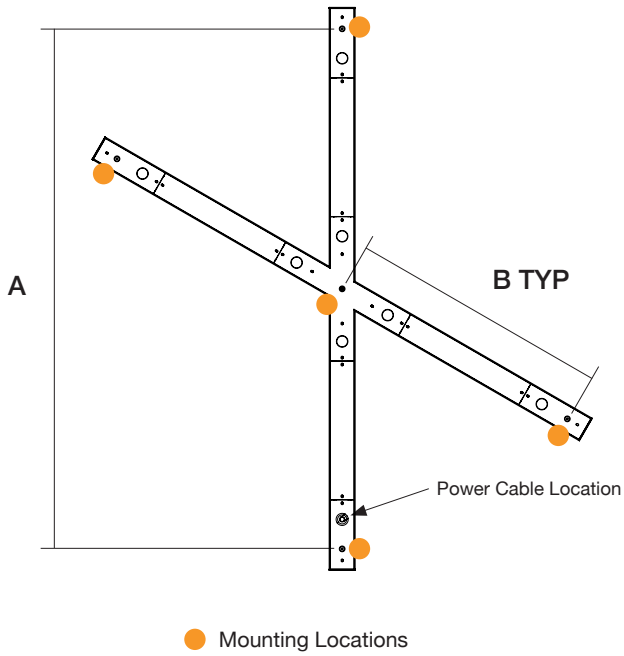

| Model   | A      | B      |
|---------|--------|--------|
| 4 x 2FT | 45.00" | 22.50" |
| 4 x 3FT | 69.00" | 34.50" |
| 4 x 4FT | 93.00" | 46.50" |

Finish Options

Standard Finishes



Grey  
RAL 7046  
Sandtex



White  
RAL 9003  
Sandtex



Black  
RAL 9004  
Sandtex

Custom Finishes



Orange  
RAL 2009  
Sandtex



Green  
RAL 6010  
Sandtex



Blue  
RAL 5012  
Sandtex



Yellow  
RAL 1037  
Sandtex

Additional finishes - Please contact factory