

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_

# Thinline X 90


## Suspended

Direct | Direct-Indirect

Architectural luminaire. 90° X Shaped light fixture. Pendant mounting.  
Direct and direct-indirect distribution options. Available in 3 sizes.  
2.25" wide. Multiple finishes.

cULus Listed

Designed and manufactured in North America.  
5 Year Warranty.

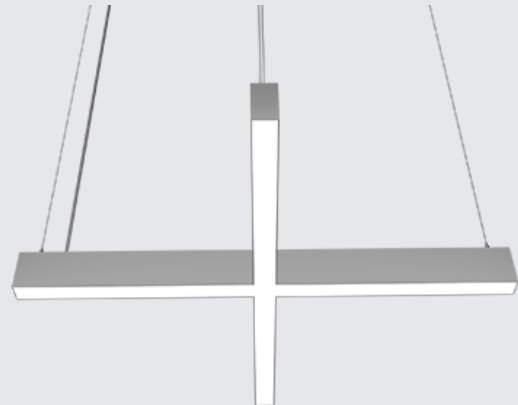

### Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W

### Ordering Options

**Sample Configuration:** DTL X 90 - 4FT x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

Model	Size	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL X 90	4 x 2FT	D 250	I 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	4 x 3FT	D 500	I 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	4 x 4FT	D 750	I 750		35K 3500K		
		D 1000	I 1000		4K 4000K		
	-Custom Sizes Available - Please Consult Factory	D _____ (custom up to 1200)	I _____ (custom up to 1200)		5K 5000K		

DTL X 90						
----------	--	--	--	--	--	--

Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted BATWING Batwing	WH White BLK Black GRY Grey CU Custom	AC Aircraft Cable 10' Standard	DIMOFF 0-10V DIMOFF <i>Optional</i> DALI LUTRON SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None <i>Optional</i> DMX SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral

*Indirect Lens: Minimum size 4FT x 2FT*

*- Contact factory for custom finishes*

		AC		
--	--	----	--	--

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None <i>Optional</i> 10KV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device	5 WIRE 5 Wire(std) <i>Optional</i> N 5 Leads 6 WIRE 6 Wire - Cable (EM - emergency battery option)	CL Clear <i>Optional</i> B Black W White	Length(Ft) - 6Ft Standard	WH White BLK Black CU Custom  <i>- Consult factory for custom finishes</i>

--	--	--	--	--	--

**LED**

L90>70,000

Samsung 301 2 McAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%

**Lens Options - Direct Distribution**




Standard  
Frosted Flat




Frosted  
0.25" Regressed

**Lens Options - Indirect Distribution**




Standard  
Frosted




Batwing

**Dimensions**

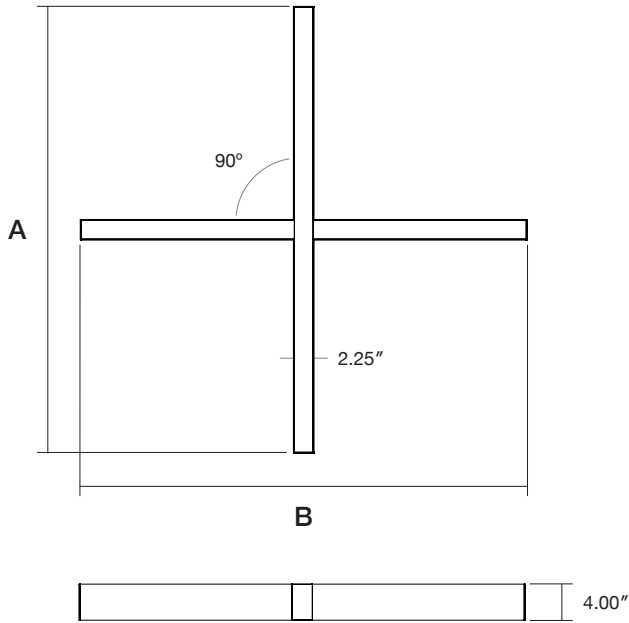

Model	A	B
4 x 2FT	48.71"	48.71"
4 x 3FT	72.71"	72.71"
4 x 4FT	96.71"	96.71"

### Mounting

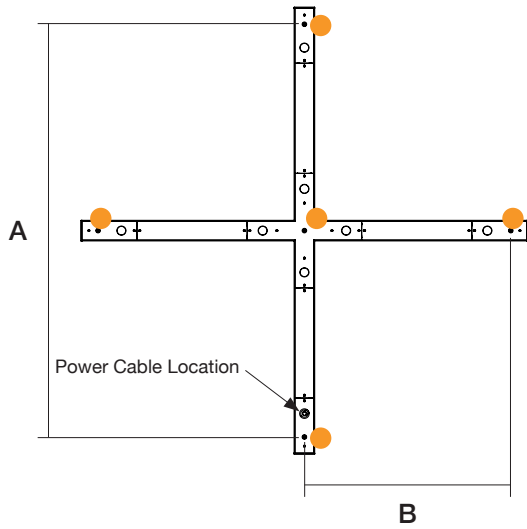

Model	A	B
4 x 2FT	45.00"	22.50"
4 x 3FT	69.00"	34.50"
4 x 4FT	93.00"	46.50"

● Mounting Locations

### Finish Options

#### Standard Finishes



Grey  
RAL 7046  
Sandtex



White  
RAL 9003  
Sandtex



Black  
RAL 9004  
Sandtex

#### Custom Finishes



Orange  
RAL 2009  
Sandtex



Green  
RAL 6010  
Sandtex



Blue  
RAL 5012  
Sandtex



Yellow  
RAL 1037  
Sandtex

Additional finishes - Please contact factory