

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_

# Thinline Double T 120

## Suspended


**Direct | Direct-Indirect**

Architectural luminaire. Double T 120° luminaire. Pendant mounting. Direct and direct-indirect distribution options. Available in 2 sizes. 2.25" wide. Multiple finishes available.

cULus Listed

Designed and manufactured in North America.

5 Year Warranty.

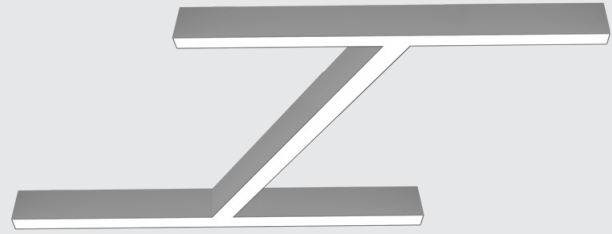

### Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



### Ordering Options

**Sample Configuration:** DTL DT 120 - 4FT x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

Model	Size	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL DT 120	4FT x 2FT	D 250	I 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	6FT x 3FT	D 500	I 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	-Custom Sizes Available - Please Consult Factory	D 750	I 750		35K 3500K		
		D 1000	I 1000		4K 4000K		
		D _____	I _____		5K 5000K		
		(custom up to 1200)	(custom up to 1200)				

DTL DT 120							
------------	--	--	--	--	--	--	--

Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted BATWING Batwing	WH White BLK Black GRY Grey CU Custom	AC Aircraft Cable 10' Standard	DIMOFF 0-10V DIMOFF <i>Optional</i> DALI LUTRON SR Lutron Ecosystem ELDO Philips SR .1% ELDO (347 only 1-10 5%)	N None <i>Optional</i> DMX SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral
Indirect Lens: Minimum size 4FT x 2FT		- Contact factory for custom finishes		
		AC		

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device	5 WIRE 5 Wire(std) <i>Optional</i> N 5 Leads 6 WIRE 6 Wire - Cable (EM - emergency battery option)	CL Clear <i>Optional</i> B Black W White	Length(Ft) - 6Ft Standard	WH White BLK Black CU Custom  - Consult factory for custom finishes

**LED**

L90>70,000

Samsung 301 2 McAdam Binning

4000K 120 Lm/W


3500K 98%

3000K 96%


90 CRI 85%

**Lens Options - Direct Distribution**


**Lens Options - Indirect Distribution**




Standard  
Frosted Flat



Frosted  
0.25" Regressed




Standard  
Frosted




Batwing

**Dimensions**

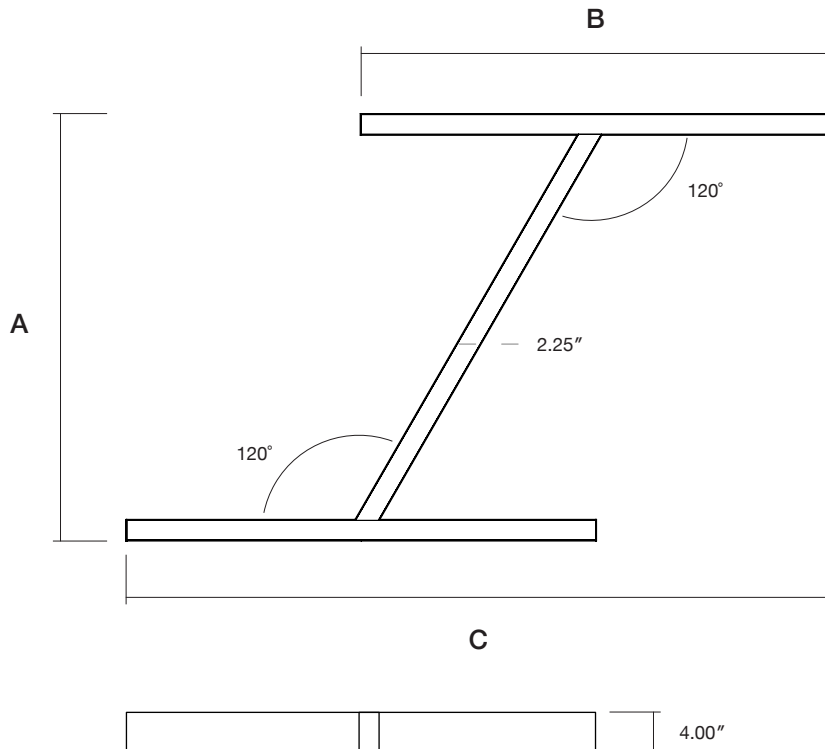

Model	A	B	C
4FT x 2FT	44.3"	48.7"	72.9"
6FT x 3FT	65.0"	72.7"	108.9"

**Mounting**

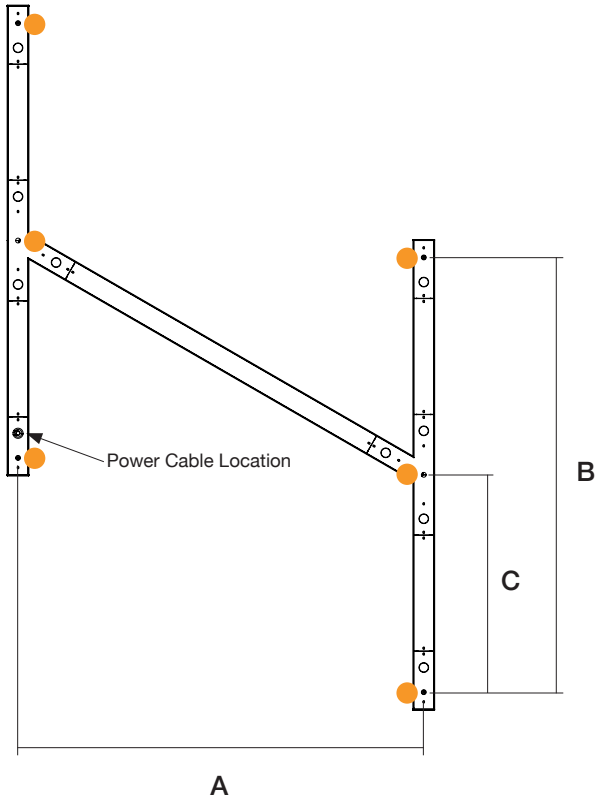

Model	A	B	C
4FT x 2FT	42.0"	45.0"	22.5"
6FT x 3FT	62.8"	69.0"	34.5"

**Finish Options**

**Standard Finishes**



Grey  
RAL 7046  
Sandtex



White  
RAL 9003  
Sandtex



Black  
RAL 9004  
Sandtex

**Custom Finishes**



Orange  
RAL 2009  
Sandtex



Green  
RAL 6010  
Sandtex



Blue  
RAL 5012  
Sandtex



Yellow  
RAL 1037  
Sandtex

Additional finishes - Please contact factory