

Fixture: _____ QTY: _____ Project : _____

Thinline Flat Suspended

Direct | Direct-Indirect

Architectural luminaire. Contemporary design. 8" wide by 2" high. 2' to 8' length options. Direct and Direct-Indirect distribution. Multiple finish options.

cULus Listed

Designed and manufactured in North America.
5 Year Warranty.



Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W

Ordering Options

Sample Configuration: DTL FLT - 8 - D500 - I500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5WIRE - CL - 8 - WH

Model	Continuous Run	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL FLT	CR _____	D 250	I 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	Min 2Ft (1Ft increments, Unibody up to 8Ft)	D 500	I 500	90	3K 3000K	H 347V	
	<i>Optional</i>	D 750	I 750		35K 3500K		
	- Available in 6in increments	D 1000	I 1000		4K 4000K		
		D _____ (custom up to 1200)	I _____ (custom up to 1200)		5K 5000K		

DTL FLT

Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted CL Clear BATWING Batwing	WH White BLK Black GRY Grey CU Custom	AC Aircraft Cable 10' Std	DIMOFF 0-10V DIMOFF <i>Optional</i> DALI LUTRON Lutron Ecosystem SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None <i>Optional</i> DMX SNS Philips SNS 300 w/ BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral

AC


Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device	5 WIRE 5 Wire (std) <i>Optional</i> N 5 Leads 6 WIRE 6 Wire - Cable (EM - emergency battery option)	CL Clear <i>Optional</i> B Black W White	Length(Ft)	WH White BLK Black CU Custom <i>- Consult factory for custom finishes</i>

LED


L90>70,000
 Samsung 301 2 McAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%

Lens Options - Direct Distribution

Lens Options - Indirect Distribution




Standard
Frosted



Standard
Frosted


Dimensions

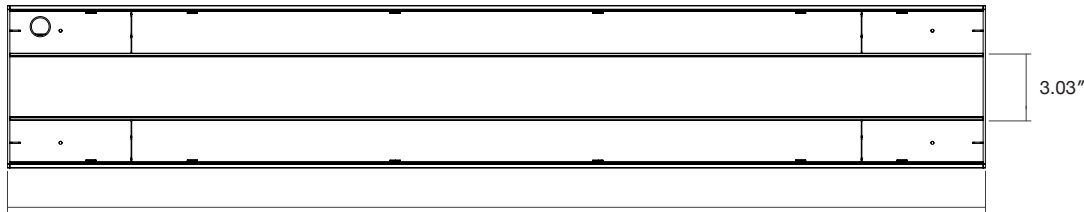


2': 24.2" 3': 36.2" 4': 48.2" 5': 60.2" 6': 72.2" 7': 84.2" 8': 96.2"

Actual Length = NOMINAL +.2"


Top

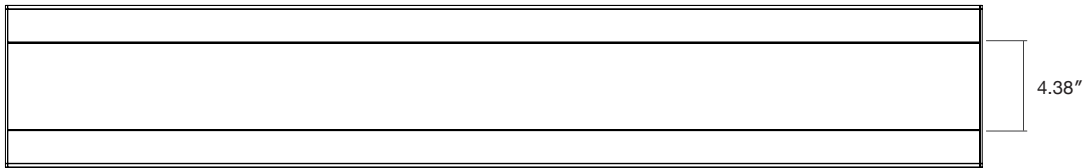

Bottom



Mounting

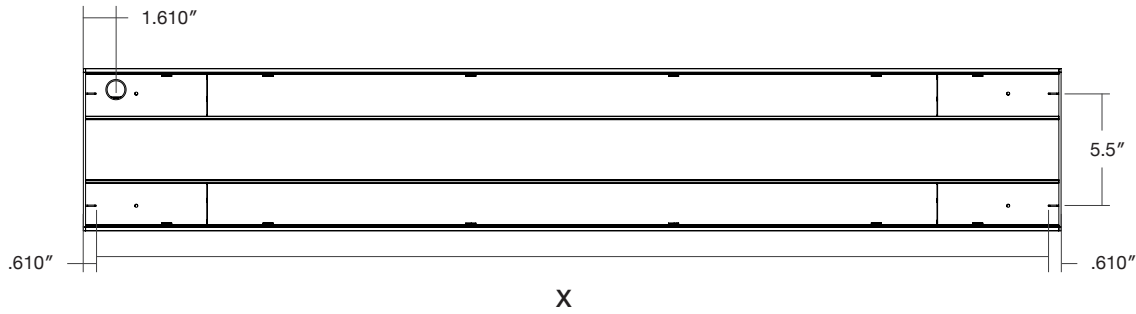

Model	Lengths - X
DTL FLT 2	23"
DTL FLT 3	35"
DTL FLT 4	47"
DTL FLT 5	59"
DTL FLT 6	71"
DTL FLT 7	83"
DTL FLT 8	95"

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - Please contact factory