

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_

# Thinline Diamond


## Suspended

Direct | Direct-Indirect

Architectural luminaire. Diamond shaped design. Pendant mounting.  
 Direct and Direct-Indirect distribution options. 3 standards sizes.  
 Additional sizes available. 2.25" wide. Multiple finishes.

cULus Listed

Designed and manufactured in North America.  
 5 Year Warranty.

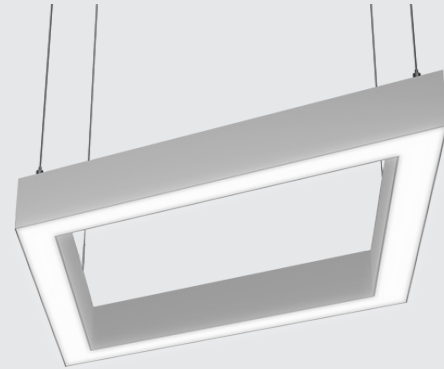

### Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



### Ordering Options

**Sample Configuration:** DTL DMND - 2FT x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

Model	Size	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL DMND	2FT x 2FT	D 250	I 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	3FT x 3FT	D 500	I 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	4FT x 4FT	D 750	I 750		35K 3500K		
		D 1000	I 1000		4K 4000K		
		D _____	I _____		5K 5000K		
	-Custom Sizes Available - Please Consult Factory	(custom up to 1200)	(custom up to 1200)				

DTL DMND

Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted	WH White	AC Aircraft Cable 10' Std	DIMOFF 0-10V DIMOFF	N None
BATWING Batwing	BLK Black		<i>Optional</i>	<i>Optional</i>
	GRY Grey		DALI	DMX
	CU Custom		LUTRON Lutron Ecosystem	SNS Philips SNS 300 w/BLD & Daylight
<i>Indirect Lens: Minimum size 2FT x 2FT</i>	<i>- Contact factory for custom finishes</i>		SR Philips SR	CLM Encelium CLM
			ELDO .1% ELDO (347 only 1-10 5%)	LG LG Dongle
				BT Bluetooth Mesh
				EN Enlighted Integral

**AC**

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit	N None	5 WIRE 5 Wire (std)	CL Clear	Length(Ft)	WH White
2 2 Circuits	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>	- 6Ft Standard	BLK Black
	10kV 10kV Surge Protection	N 5 Leads	B Black		CU Custom
	EM Emergency Battery	6 WIRE 6 Wire - Cable (EM - emergency battery option)	W White		<i>- Consult factory for custom finishes</i>
	+GTD Generator Transfer Device				

**LED**

L90>70,000

Samsung 301 2 McAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%

**Lens Options - Direct Distribution**




Standard  
Frosted Flat




Frosted  
0.25" Regressed

**Lens Options - Indirect Distribution**




Standard  
Frosted




Batwing

**Dimensions**

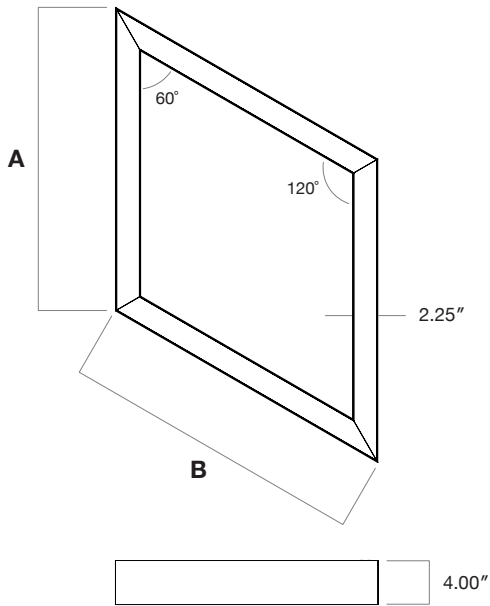

Model	A	B
2FT x 2FT	27.1"	27.1"
3FT x 3FT	39.1"	39.1"
4FT x 4FT	51.1"	51.1"

### Mounting

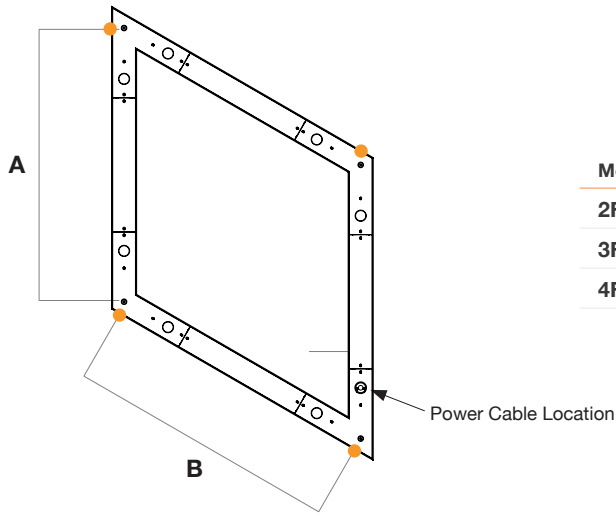

Model	A	B
2FT x 2FT	24.5"	24.5"
3FT x 3FT	36.5"	36.5"
4FT x 4FT	48.5"	48.5"

● Aircraft Cable Mounting Locations (4)

### Finish Options

#### Standard Finishes



Grey  
RAL 7046  
Sandtex



White  
RAL 9003  
Sandtex



Black  
RAL 9004  
Sandtex

#### Custom Finishes



Orange  
RAL 2009  
Sandtex



Green  
RAL 6010  
Sandtex



Blue  
RAL 5012  
Sandtex



Yellow  
RAL 1037  
Sandtex

Additional finishes - Please contact factory