

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_


# Thinline Surface

## Direct

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Cast end caps with light block. Surface mounting. 2.25", 3.18", and 4.5" widths. Continuous runs available.

cULus Listed

Designed and manufactured in North America.  
5 Year Warranty.

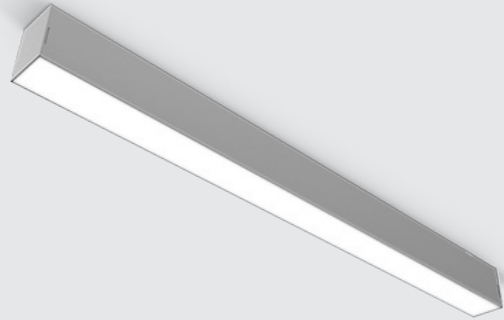

## Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Model: Thinline 3.18

## Ordering Options

Sample Configuration: DTL SU - 3.18 - 8 - D500 - 90 - 4K - U - FR - WH - S - DIMOFF - N - N - 5 WIRE

Model	Width	Continuous Run	Direct Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL SU	2.25	CR _____	D 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	3.18	Min 2Ft (1Ft increments, Unibody up to 8Ft)	D 500	90	3K 3000K	H 347V	Optional
	4.5	Optional - Available in 6in increments	D 750 D 1000 D _____ (custom up to 1200)		35K 3500K 4K 4000K 5K 5000K		FFREG Frosted Regressed ASY Asymmetric Clear 0.5 FRDRP 0.5" Frosted Drop Lens 1.5 FRDRP 1.5" Frosted Drop Lens LVR Louver Lens

DTL SU


Finish	Mounting	Driver	Controls
<b>WH</b> White <b>BLK</b> Black <b>GRY</b> Grey <b>CU</b> Custom  - Consult factory for custom finishes	<b>S</b> Solid Optional <b>STB 9/16</b> T-Bar 9/16 <b>STB 15/16</b> T-Bar 15/16	<b>DIMOFF</b> 0-10V DIMOFF Optional <b>DALI</b> <b>LUTRON</b> Lutron Ecosystem <b>SR</b> Philips SR <b>ELDO</b> .1% ELDO (347 only 1-10 5%)	<b>N</b> None Optional <b>DMX</b> <b>SNS</b> Philips SNS 300 w/BLD & Daylight <b>CLM</b> Encelium CLM <b>LG</b> LG Dongle <b>BT</b> Bluetooth Mesh <b>EN</b> Enlighted Integral

Accessories	Wiring
<b>N</b> None Optional <b>10kV</b> 10kV Surge Protection <b>EM</b> Emergency Battery <b>+GTD</b> Generator Transfer Device	<b>N</b> 5 Leads Optional <b>5 WIRE</b> 5 Wire <b>6 WIRE</b> 6 Wire - Cable (EM - emergency battery option)



**LED**

L90>70,000  
 Samsung 301 2 McAdam Binning  
 4000K 120 Lm/W  
 3500K 98%  
 3000K 96%  
 90 CRI 85%

**Lens Options - Direct Distribution**

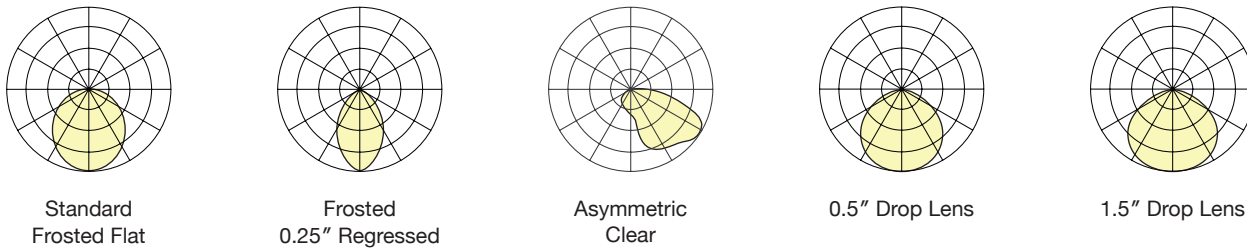


**Dimensions**

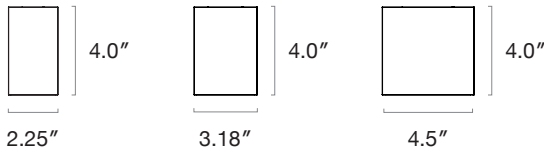

2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"

Actual Length = NOMINAL +.2"

**Mounting**

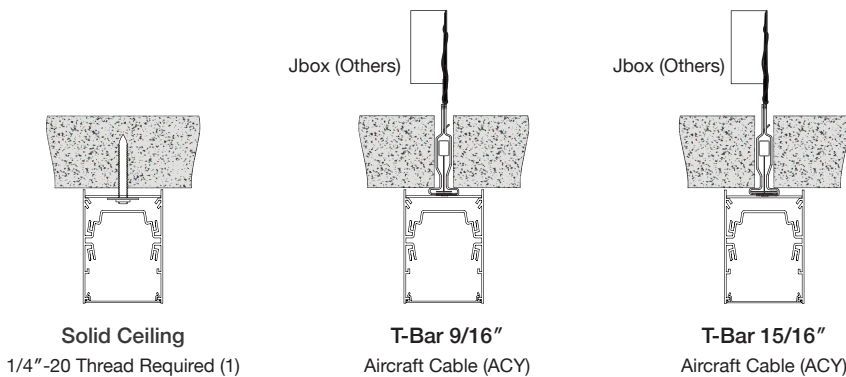

## Finish Options

### Standard Finishes



Grey  
RAL 7046  
Sandtex



White  
RAL 9003  
Sandtex



Black  
RAL 9004  
Sandtex

### Custom Finishes



Orange  
RAL 2009  
Sandtex



Green  
RAL 6010  
Sandtex



Blue  
RAL 5012  
Sandtex



Yellow  
RAL 1037  
Sandtex

Additional finishes - *Please contact factory*