

Fixture: _____ QTY: _____ Project : _____


Zip Eco Linear

LED linear. 2', 4, and 8' length options. High impact acrylic lens. Wall mountable option. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Dry and damp rated.

DLC Listed. cULus Listed.

Designed and manufactured in North America.

5 Year Warranty.

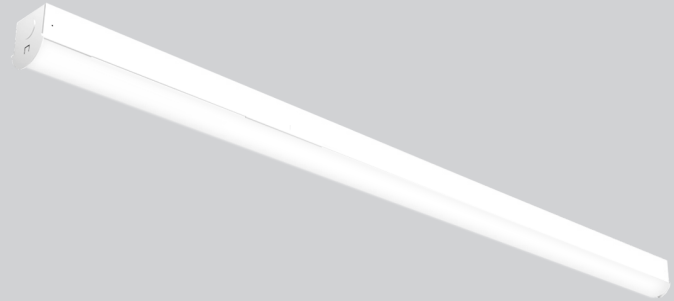

Ordering Options

Sample Configuration: ZIP - 8 - 60 - 80 - 4K - U - FR - WH - V - BFC - N - ECO

Model	Length	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting	
ZIP	2	20, 30	80	3K 3000K	U 120/277V	FR Frosted	WH White	V V Hooks	
	4	20, 30, 40, 60	90	35K 3500K	H 347/480V			SU Surface	
	8	40, 60, 80, 100, 120, 160	4K 4000K	5K 5000K	<i>Optional</i>				
			CR Continuous Run						

ZIP FR WH

Wiring	Accessories	Type
BFC Black Flexible Cord	N None	ECO
WFC White Flexible Cord	<i>Optional</i>	
IN Internal	OCC Occupancy Sensor (on/off)	
	10kV 10kV Surge Protection	
	WG Wire Guard	
	RFL Reflector	
	EM Emergency Driver Integral Programmable	
	MICRO Microwave Sensor -External (with BLD and Daylight Harvesting options)	

ECO

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Features & Specifications


Efficacy:	Zip 2: 142 Lm/W Zip 4: Up to 155 Lm/W Zip 8: Up to 158 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-35°C to +45°C -31°F to +113°F
Controls:	0-10V Dimming
Mounting:	V Hook, Surface Mount
Accessories:	Occupancy Sensor (on/off), Emergency Battery, 10kV Surge Protection, Wire Guard, Reflector, Microwave Sensor (external)

Output Performance at 4K


Model	Watts	Lm/W	Delivered Lumens
Zip 2 20	20.63	141.88	2,927
Zip 2 30	30.95	141.87	4,391
Zip 4 20	18.90	150.26	2,840
Zip 4 30	29.08	153.30	4,458
Zip 4 40	39.26	154.74	6,075
Zip 4 60	59.14	152.96	9,046

Model	Watts	Lm/W	Delivered Lumens
Zip 8 40	39.26	157.62	6,188
Zip 8 60	59.24	155.09	9,172
Zip 8 80	79.26	154.67	12,259
Zip 8 100	99.38	154.42	15,346
Zip 8 120	119.26	154.42	18,416

Dimensions

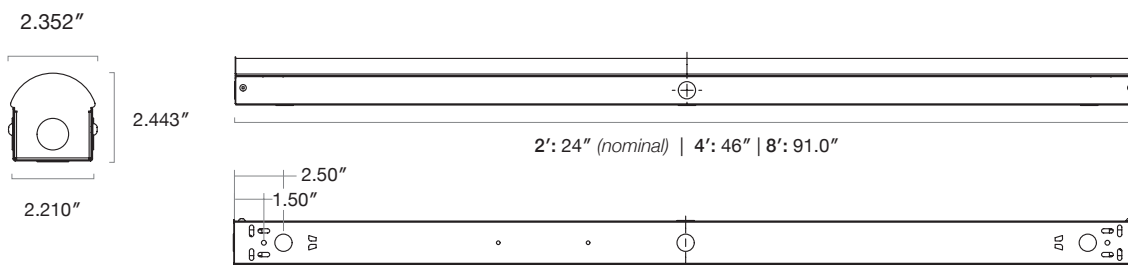


Wire Guard

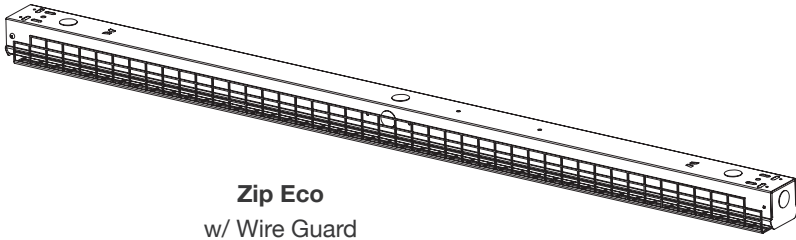


Zip Eco
w/ Wire Guard

Reflector Option

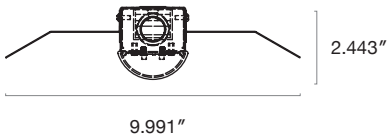

Note: Zip 2 - Please contact factory

Zip 4

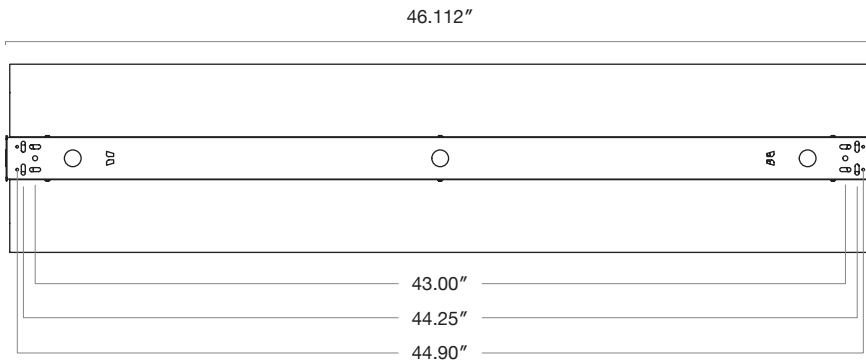

Zip 8

