

Fixture: _____ QTY: _____ Project : _____


Thinline Hexagon Suspended

Direct | Direct-Indirect

Architectural luminaire. Hexagonal shaped design. Pendant mounting. Direct and Direct-Indirect distribution options. 3 standards sizes. Additional sizes available. 2.25" wide. Multiple finishes.

cULus Listed

Designed and manufactured in North America.
5 Year Warranty.

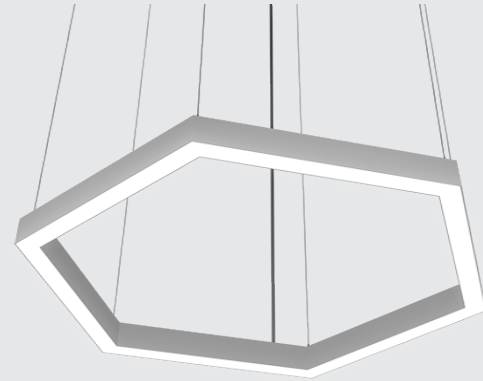

Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Ordering Options

Sample Configuration: DTL HEX - 6 x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

Model	Size	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL HEX	6 x 2FT	D 250	I 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	6 x 3FT	D 500	I 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	6 x 4FT	D 750	I 750		35K 3500K		
		D 1000	I 1000		4K 4000K		
		D _____	I _____		5K 5000K		
	-Custom Sizes Available - Please Consult Factory	(custom up to 1200)	(custom up to 1200)				

Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted	WH White	AC Aircraft Cable 10' Std	DIMOFF 0-10V DIMOFF	N None
BATWING Batwing	BLK Black		Optional	Optional
	GRY Grey		DALI	DMX
	CU Custom		LUTRON	SNS Philips SNS 300 w/BLD & Daylight
Indirect Lens: Minimum size 6 x 2FT	- Contact factory for custom finishes		SR Philips SR	CLM Encelium CLM
			ELDO .1% ELDO (347 only 1-10 5%)	LG LG Dongle
				BT Bluetooth Mesh
				EN Enlighted Integral


AC

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit	N None	5 WIRE 5 Wire (std)	CL Clear	Length(Ft)	WH White
2 2 Circuits	Optional	Optional	Optional	- 6Ft Standard	BLK Black
	10kV 10kV Surge Protection	N 5 Leads	B Black		CU Custom
	EM Emergency Battery	6 WIRE 6 Wire - Cable (EM - emergency battery option)	W White		- Consult factory for custom finishes
	+GTD Generator Transfer Device				


LED

L90>70,000
 Samsung 301 2 McAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%

Lens Options - Direct Distribution




Standard
Frosted Flat




Frosted
0.25" Regressed

Lens Options - Indirect Distribution




Standard
Frosted



Batwing


Dimensions

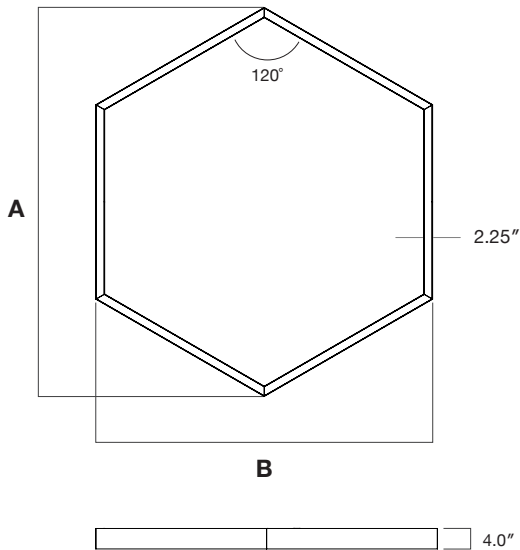

Model	A	B
6 x 2FT	51.6"	44.7"
6 x 3FT	75.6"	65.5"
6 x 4FT	99.6"	86.3"

Note:
 6 x 2FT - 1 Piece
 6 x 3FT - 1 Piece
 6 x 4FT - 2 Pieces

Mounting

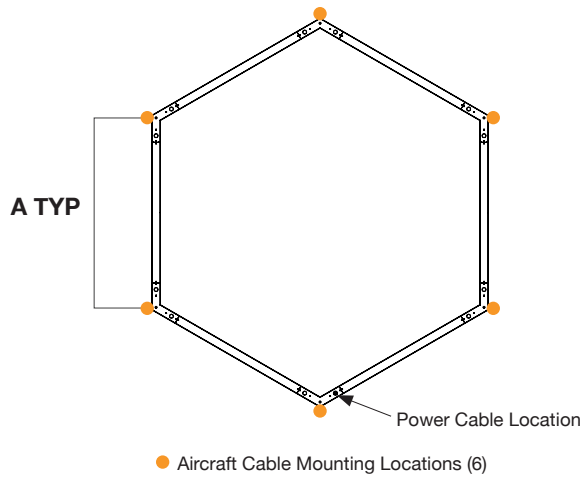

Model	A
6 x 2FT	24.5"
6 x 3FT	36.5"
6 x 4FT	48.5"

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - Please contact factory