

Fixture: _____ QTY: _____ Project : _____

Airflex


High Bay

Commercial LED high bay. Steel construction with high gloss white finish. 2' and 4' lengths. Occupancy sensor, Bi-Level dimming, and 10kV surge protection available. Dry and damp rated.

DLC Listed. cULus Listed

Designed and manufactured in North America

5 Year Warranty

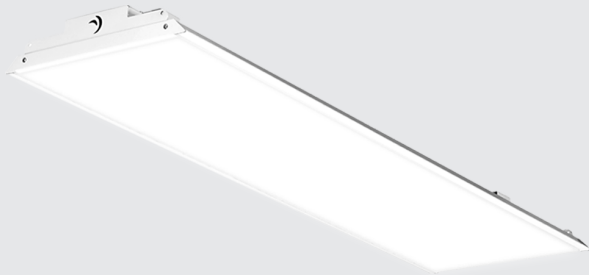

Ordering Options

Sample Configuration: Sample Configuration: AIRFLEX - 2 - 80 - 90 - 4K - U - FR - WH - V - BFC - OCC - N - IB

Model	Length	Watts: 2Ft	Watts: 4Ft	CRI	Color Temp	Voltage	Lens
AIRFLEX	2	80	80	80	3K 3000K	U 120/277V	NL No Lens (standard)
	4	95	95	90	35K 3500K	H 347/480V	Optional
		110	110		4K 4000K		FR Frosted
		135	135		5K 5000K		CL Clear (shatterproof polycarbonate)
		160	160				
		190	190				
		240					
		320					
		400					
		480					

AIRFLEX

Finish	Mounting	Wiring	Accessories	Reflector
WH White	V V Clips AC Aircraft Cable	BFC Black Flexible Cord WFC White Flexible Cord	N None Optional OCC Occupancy Sensor (on/off) BLD Bi-Level Dimming (100%/10%) 10kV 10kV Surge Protection EM Emergency Battery	N None Optional 60AR 60° Aisle Reflector

WH

Packaging

IB Individually Boxed
SKE Skidded with End Caps

Features & Specifications

Efficacy:	2': Up to 162 Lm/W 4': Up to 156 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347/480V
Operating Temperature:	-20°C to +55°C -4°F to +131°F
Controls:	0-10V Dimming
Mounting:	V Clips, Aircraft Cable
Accessories:	Occupancy Sensor (on/off), Bi-Level Dimming (100%/10%), 10kV Surge Protection, Emergency Battery, 60° Aisle Reflector

Output Performance


Model	Watts	Lm/W	Delivered Lumens
Airflex 2 80	75.85	153	11,591
Airflex 2 95	92.03	153	14,104
Airflex 2 110	107.60	154	16,616
Airflex 2 135	129.90	157	20,392
Airflex 2 160	151.70	162	24,627
Airflex 2 190	180.14	149	26,886

Model	Watts	Lm/W	Delivered Lumens
Airflex 4 80	76.45	151	11,542
Airflex 4 95	92.03	153	14,044
Airflex 4 110	107.6	154	16,545
Airflex 4 135	129.9	156	20,306
Airflex 4 160	153.96	150	23,104
Airflex 4 190	191.46	149	28,553
Airflex 4 240	228.95	149	34,002
Airflex 4 320	303.93	148	44,900
Airflex 4 400	378.92	147	55,798
Airflex 4 480	453.9	147	66,696

Dimensions


Airflex 2

Models: 80, 95, 110, 135, 160, 190

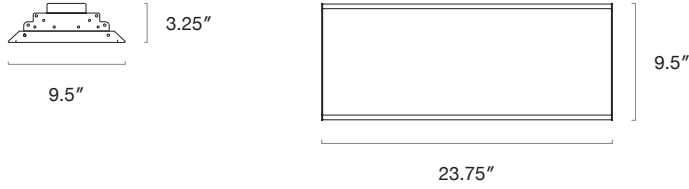


Airflex 4

Models: 80, 95, 110

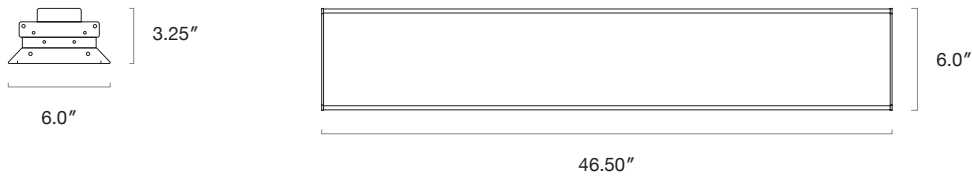

Airflex 4

Models: 135, 160, 190, 240, 320

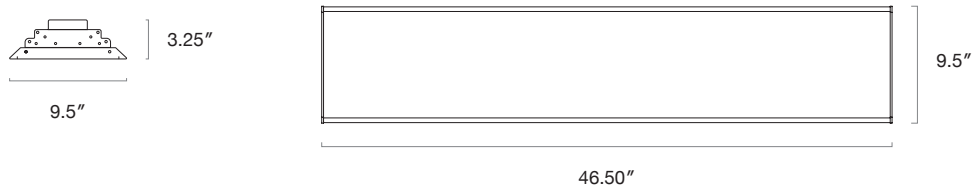

Airflex 4

Models: 400, 480

