

Fixture: _____ QTY: _____ Project : _____

Arius LB

Low Bay Surface Mount

Low profile surface mount lighting. Side spill and down light distribution options. Polycarbonate protective lens. Commercial, industrial, and outdoor applications.

DLC Listed. cULus Listed.

Designed and manufactured in North America.

5 Year Warranty.



Ordering Options

Sample Configuration: ARIUS LB - 40 - 80 - 4K - U - CL - SS - WH - FM - BFC - N

Model	Watts	CRI	Color Temp	Voltage	Lens	Distribution	Finish	Mounting
ARIUS LB	40 60	80 90	3K 3000K	U 120/277V H 347/480V	CL Clear	SS Side Spill DL Down Light	WH White BLK Black	SU Surface Mount ST Stem
			35K 3500K					
			4K 4000K					
			5K 5000K					

ARIUS LB

Wiring

BFC Black Flexible Cord
WFC White Flexible Cord

Accessories

N None
Optional
OCC Occupancy Sensor (on/off)
BLD Bi-Level Dimming (100%/10%)
10kV 10kV Surge Protection
PC Photo Control

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.


Features & Specifications

Efficacy:	Side Spill: Up to 99 Lm/W Down Light: 100 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	180,000+ Life Hours (L70)
Voltage:	120/277V 347/480V
Operating Temperature:	-20°C to +35°C -4°F to +95°F -40°C to +35°C -40°F to +95°F - available
Controls:	0-10V Dimming
Mounting:	Flush Mount, Stem
Accessories:	Occupancy Sensor (on/off), Bi-Level Dimming (100%/10%), 10kV Surge Protection, Photo Control


Output Performance

Model	Distribution	Watts	Lm/W	Delivered Lumens
Arius LB 40	Side Spill	40	99.2	3,967
Arius LB 60	Side Spill	57	92.2	5,256
Arius LB 40	Down Light	40	110	4,400
Arius LB 60	Down Light	57	110	6,270

Photometrics




Arius LB 40
Side Spill Distribution



Arius LB 60
Side Spill Distribution

Dimensions

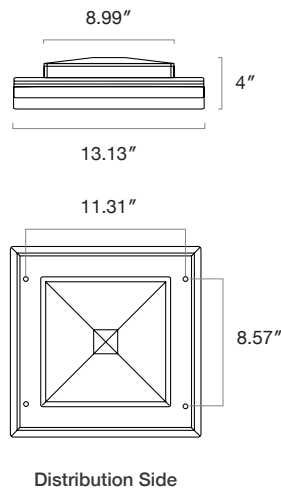

Distribution Side

Mounting Side