

Fixture: _____ QTY: _____ Project : _____

Del Snap Metric 2.0

Troffer Fixture

LED Metric Troffer fixture. Steel construction. White finish.
Diffused acrylic lens. Easy lay-in installation.
General ceiling light applications.
cULus Listed
Designed and manufactured in North America
5 Year Warranty



Ordering Options

Sample Configuration: DEL SNAP METRIC 2.0 - 1x4 - 30 - 80 - 4K - U - FR - WH - TBAR - IN - N

Model	Size	Watts	CRI	Color Temp	Voltage	Lens
DEL SNAP METRIC 2.0	300x1200	15, 20, 25, 30, 35, 40, 50, 60	80	27K 2700K	U 120/277V	FR Frosted
	300x1500	15, 20, 25, 30, 35, 40, 50, 60	90	3K 3000K		
	500x500	15, 20, 25, 30		35K 3500K		
	500x1200	15, 20, 25, 30, 35, 40, 50, 60		4K 4000K		
	500x1500	15, 20, 25, 30, 35, 40, 50, 60		5K 5000K		

DEL SNAP METRIC 2.0 **FR**

Finish	Mounting	Wiring	Accessories
WH White	TBAR T-Bar	IN Internal	N None
	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>
	DTRK Drywall Trim Kit	BFC Black Flexible Cord	OCC Occupancy Sensor (on/off)
		WFC White Flexible Cord	10kV 10kV Surge Protection
			EM Emergency Battery
			WIFI Wifi Dimming
			AH Air Handling Slots

WH

Note: For custom configurations please contact factory

Features & Specifications

Efficacy:	130 Lm/W
CRI:	80 90
Color Temperature:	2700K, 3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-40°C to +40°C -40°F to +104°F
Controls:	0-10V Dimming
Mounting:	T-Bar, Drywall Kit
Accessories:	Occupancy Sensor (on/off), 10kV Surge Protection, Emergency Battery, WIFI Dimming, Air Handling Slots

Output Performance

Model	Watts	Lm/W	Delivered Lumens
Del Snap 300x1200	15	130	1,950
	20	130	2,600
	25	130	3,250
	30	130	3,900
	35	130	4,550
	40	130	5,200
	50	130	6,500
	60	130	7,800

Model	Watts	Lm/W	Delivered Lumens
Del Snap 500x1200	15	130	1,950
	20	130	2,600
	25	130	3,250
	30	130	3,900
	35	130	4,550
	40	130	5,200
	50	130	6,500
	60	130	7,800

Model	Watts	Lm/W	Delivered Lumens
Del Snap 300x1500	15	130	1,950
	20	130	2,600
	25	130	3,250
	30	130	3,900
	35	130	4,550
	40	130	5,200
	50	130	6,500
	60	130	7,800

Model	Watts	Lm/W	Delivered Lumens
Del Snap 500x1500	15	130	1,950
	20	130	2,600
	25	130	3,250
	30	130	3,900
	35	130	4,550
	40	130	5,200
	50	130	6,500
	60	130	7,800


Model	Watts	Lm/W	Delivered Lumens
Del Snap 500x500	15	130	1,950
	20	130	2,600
	25	130	3,250
	30	130	3,900

Photometrics

Intensity Summary - Candelas


Angle	0	22.5	45	67.5	90
0	1720	1720	1720	1720	1720
5	1683	1691	1710	1734	1752
10	1659	1669	1692	1718	1735
15	1620	1626	1652	1682	1700
20	1560	1563	1595	1627	1648
25	1484	1486	1524	1561	1583
30	1391	1395	1440	1484	1507
35	1289	1293	1346	1397	1423
40	1175	1181	1243	1301	1332
45	1051	1060	1132	1201	1233
50	992	937	1020	1101	1136
55	794	814	909	1002	1043
60	665	689	797	911	958
65	535	568	687	818	859
70	409	454	599	695	729
75	285	348	467	549	579
80	173	243	325	381	399
85	80	120	162	182	190
90	8	9	13	17	20

Polar Candela Distribution

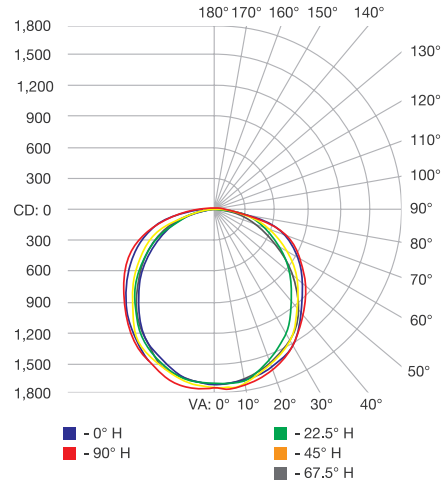


Dimensions


Del Snap
300x 1200

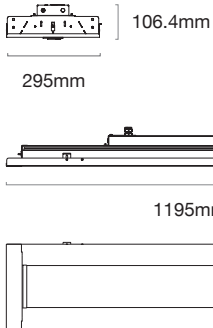




Del Snap
300x 1500

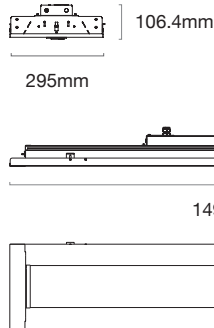

Del Snap
500x500

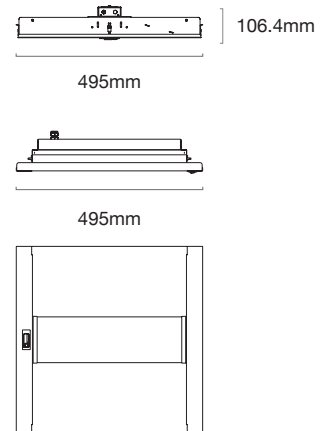

Del Snap
500x 1200

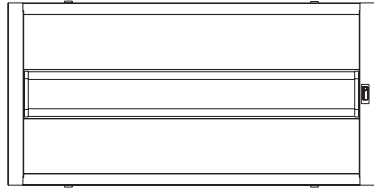

Del Snap
500x 1500

