

Fixture: _____ QTY: _____ Project : _____


Thinline L 135

Suspended Direct | Direct/Indirect

Architectural luminaire. 135° L Shaped fixture. Pendant mounting. Direct and direct-indirect distribution options. Available in 3 sizes. 2.25" wide. Multiple finishes available.

cULus Listed

Designed and manufactured in North America
5 Year Warranty

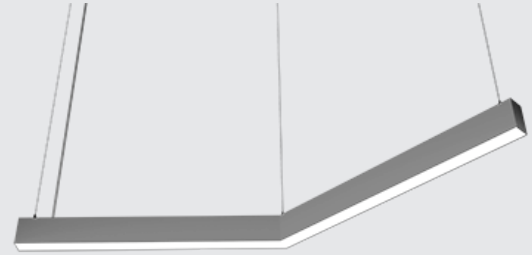

Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Ordering Options

Sample Configuration: DTL L 135 - 2FT x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

| Model | Size | Direct Lm/ft | Indirect Lm/ft | CRI | Color Temp | Voltage | Direct Lens |
|-----------|--|---------------------|---------------------|-----|------------|------------|-------------------------|
| DTL L 135 | 2FT x 2FT | D 250 | I 250 | 80 | 27K 2700K | U 120/277V | FR Frosted Flat |
| | 3FT x 3FT | D 500 | I 500 | 90 | 3K 3000K | H 347V | FRREG Frosted Regressed |
| | 4FT x 4FT | D 750 | I 750 | | 35K 3500K | | |
| | | D 1000 | I 1000 | | 4K 4000K | | |
| | | D _____ | I _____ | | 5K 5000K | | |
| | -Custom Sizes Available - Please Consult Factory | (custom up to 1200) | (custom up to 1200) | | | | |

| Indirect Lens | Finish | Mounting | Driver | Controls |
|-----------------|---------------------------------------|-------------------|----------------------------------|--------------------------------------|
| FR Frosted | WH White | AC Aircraft Cable | DIMOFF 0-10V DIMOFF | N None |
| BATWING Batwing | BLK Black | 10' Standard | Optional | Optional |
| | GRY Grey | | DALI | DMX |
| | CU Custom | | LUTRON Lutron Ecosystem | SNS Philips SNS 300 w/BLD & Daylight |
| | - Contact factory for custom finishes | | SR Philips SR | CLM Encelium CLM |
| | | | ELDO .1% ELDO (347 only 1-10 5%) | LG LG Dongle |
| | | | | BT Bluetooth Mesh |
| | | | | EN Enlighted Integral |

| | | | | |
|----------------------|----------------------|-----------|----------------------|----------------------|
| <input type="text"/> | <input type="text"/> | AC | <input type="text"/> | <input type="text"/> |
|----------------------|----------------------|-----------|----------------------|----------------------|

| Circuits | Accessories | Wiring | Wire Color | Wire Length | Canopy Color |
|--------------|--------------------------------|---|------------|----------------|---------------------------------------|
| 1 1 Circuit | N None | 5 WIRE 5 Wire(std) | CL Clear | Length(Ft) | WH White |
| 2 2 Circuits | Optional | Optional | Optional | - 6Ft Standard | BLK Black |
| | 10kV 10kV Surge Protection | N 5 Leads | B Black | | CU Custom |
| | EM Emergency Battery | 6 WIRE 6 Wire - Cable (EM - emergency battery option) | W White | | - Consult factory for custom finishes |
| | +GTD Generator Transfer Device | | | | |

| | | | | | |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|

LED

L90>70,000

Samsung 301 3-Step MacAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%

Lens Options - Direct Distribution




Standard
Frosted Flat




Frosted
0.25" Regressed

Lens Options - Indirect Distribution




Standard
Frosted




Batwing

Dimensions

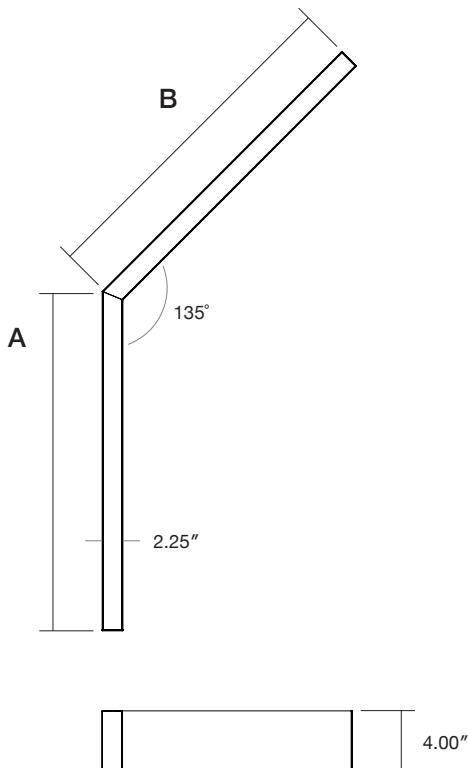

| Model | A | B |
|-----------|-------|-------|
| 2FT x 2FT | 24.8" | 24.8" |
| 3FT x 3FT | 36.8" | 36.8" |
| 4FT x 4FT | 48.8" | 48.8" |

Mounting

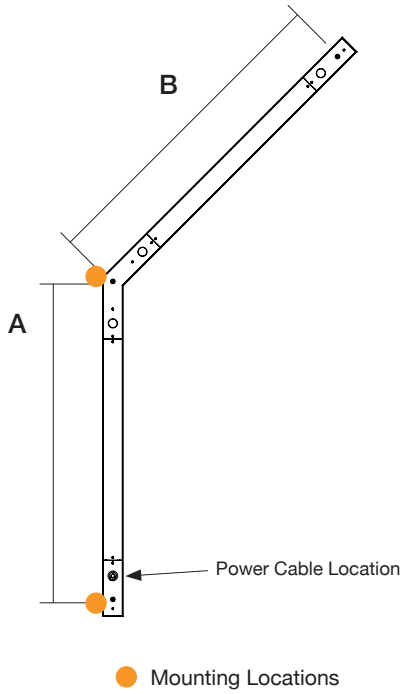

| Model | A | B |
|-----------|-------|-------|
| 2FT x 2FT | 22.5" | 22.5" |
| 3FT x 3FT | 34.5" | 34.5" |
| 4FT x 4FT | 46.5" | 46.5" |

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - Please contact factory