

Fixture: _____ QTY: _____ Project : _____

VT4L

Vapor Tight

Weather proof luminaire. Polycarbonate shatterproof housing with stainless steel latches. Enclosed and gasketed body protects electronics from harsh weather elements. Moisture, vapor, chemical resistant, corrosion free, and dust protective. Frosted and clear lens options. NSF available.

cULus Listed
5 Year Warranty



Ordering Options

Sample Configuration: VT4L - 120 - 80 - 4K - U - CL - GRY - AC - BFC - N

Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting
VT4L	120	80	3K 3000K	U 120/277V	FR Frosted	GRY Grey	AC Aircraft Cable
	160	90	35K 3500K	H 347V	CL Clear	Optional	V V Hooks
	190		4K 4000K				
	240		5K 5000K				WH White
VT4L	<input type="text"/>						

Wiring

BFC Black Flexible Cord
WFC White Flexible Cord

Accessories

N None
Optional
OCC Occupancy Sensor (on/off)
BLD Bi-Level Dimming (100%/10%)
WBD Waterproof Bi-Level Dimming (100%/10%)
WOC Waterproof Occupancy Sensor (on/off)
10kV 10kV Surge Protection
EM Emergency Battery

<input type="text"/>	<input type="text"/>
----------------------	----------------------

Note: For custom configurations please contact factory


Features & Specifications

Efficacy:	Up to 159 Lm/W
CRI:	80, 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-40°C to +40°C -40°F to +104°F +55°C +131°F - available
Controls:	Continuous Dimming to 10% or Below
Mounting:	Aircraft Cable, V Hooks
Accessories:	Occupancy Sensor, Waterproof Occupancy Sensor, Bi-Level Dimming, Waterproof Bi-Level Dimming, 10kV Surge Protection, Emergency Battery

Output Performance

Model	Watts	Lm/W	Delivered Lumens
VT4L 120	119	159	19,300
VT4L 160	158	159	25,700
VT4L 190	189	155.4	29,300
VT4L 240	240	155.4	37,296

Dimensions

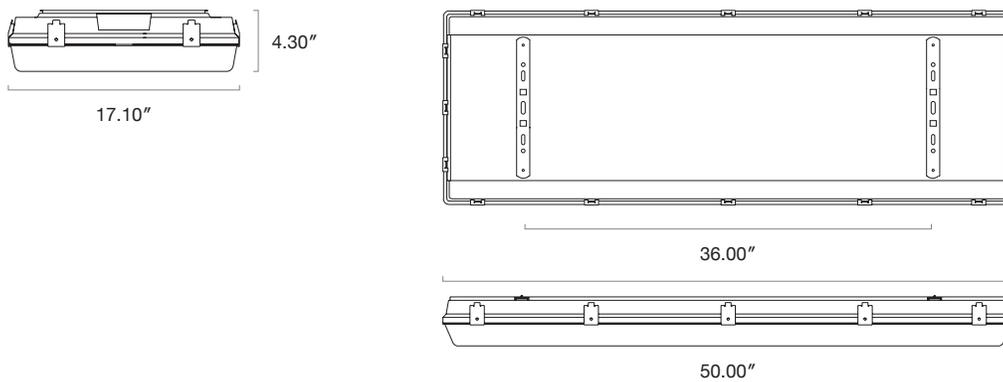

Mounting Bracket (Standard)

