

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_


# Zip Cloud

## Suspended Direct/Indirect

Contemporary and modern design. Direct-indirect distribution. Pendant mounting. Powder coated aluminum extrusion. Seamless body. 200,000 hr+ L70 w/Samsung LEDs.

cULus Listed

Designed and manufactured in North America  
5 Year Warranty

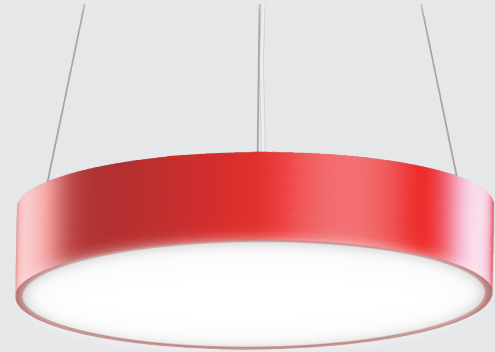

### Ordering Options

**Sample Configuration:** ZIP CLOUD - 44 - 120 - 90 - 4K - U - DIRECT-INDIRECT - WH - AC - BFC 3 WIRE - DIMOFF - WH

Model	Size	Direct Watts	Indirect Watts	CRI	Color Temp	Voltage	Distribution
ZIP CLOUD	18	20, 40, 60, 70	20, 40	80	3K 3000K	U 120/277V	DIRECT-INDIRECT
	24	20, 40, 60, 80	20, 40	90	35K 3500K	H 347V	
	36	40, 80, 120, 160	20, 40, 60		4K 4000K		
	44	80, 120, 160	20, 40, 60		5K 5000K		

ZIP CLOUD        DIRECT-INDIRECT

Finish	Mounting	Wiring	Driver	Canopy Finish
<b>WH</b> White <b>BLK</b> Black <b>GRY</b> Grey <b>CU</b> Custom <i>- Consult factory for custom finishes</i>	<b>AC</b> Aircraft Cable	<b>BFC 3 WIRE</b> Black 3 Conductor Wire _____ <b>BFC 5 WIRE</b> Black 5 Conductor Wire _____ <b>WFC 3 WIRE</b> White 3 Conductor Wire _____ <b>WFC 5 WIRE</b> White 5 Conductor Wire _____	<b>DIMOFF</b> 0-10V DIMOFF	<b>WH</b> White <b>CU</b> Custom <i>- Consult factory for custom finishes</i>

**AC**  **DIMOFF**

## Features & Specifications

Efficacy:	120 Lm/W
CRI:	80   90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V   347V
Driver:	0-10 1% Dim to off driver
Mounting:	Aircraft Cable

## Output Performance

Model	Direct Watts	Lm/W	Delivered Lumens	Indirect Watts	Lm/W	Delivered Lumens
Zip Cloud 18	20	120	2,400	20	120	2,400
	40		4,800			4,800
	60		7,200			
	70		8,400			
Zip Cloud 24	20	120	2,400	20	120	2,400
	40		4,800			4,800
	60		7,200			
	80		9,600			
Zip Cloud 36	40	120	4,800	20	120	2,400
	80		9,600			4,800
	120		14,400			7,200
	160		19,200			
Zip Cloud 44	80	120	9,600	20	120	2,400
	120		14,400			4,800
	160		19,200			7,200

## Dimensions

