

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_


# Zip Cloud

## Suspended Direct

Contemporary and modern design. Pendant mounting. Powder coated aluminum extrusion. Seamless body. 200,000 hr+ L70 w/Samsung LEDs.

cULus Listed

Designed and manufactured in North America  
5 Year Warranty

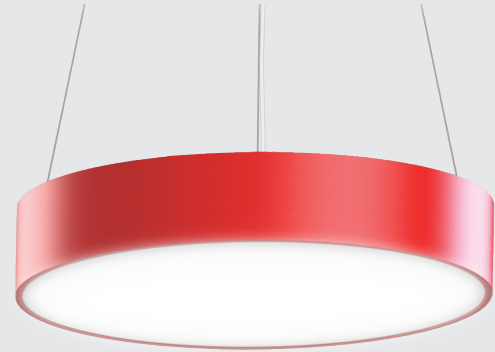

### Ordering Options

**Sample Configuration:** ZIP CLOUD - 44 - 120 - 90 - 4K - U - DIRECT - WH - AC - BFC 3 WIRE - DIMOFF - WH

Model	Size	Watts	CRI	Color Temp	Voltage	Distribution	Finish
ZIP CLOUD	18	20, 40, 60, 70	80	3K 3000K	U 120/277V	DIRECT	WH White
	24	20, 40, 60, 80	90	35K 3500K	H 347V		BLK Black
	36	40, 80, 120, 160		4K 4000K			GRY Grey
	44	80, 120, 160		5K 5000K			CU Custom

- Consult factory for custom finishes

ZIP CLOUD      DIRECT

Mounting	Wiring	Driver	Canopy Finish
AC Aircraft Cable	<b>BFC 3 WIRE</b> Black 3 Conductor Wire _____ <b>BFC 5 WIRE</b> Black 5 Conductor Wire _____ <b>WFC 3 WIRE</b> White 3 Conductor Wire _____ <b>WFC 5 WIRE</b> White 5 Conductor Wire _____	<b>DIMOFF</b> 0-10V DIMOFF	<b>WH</b> White <b>CU</b> Custom - Consult factory for custom finishes
AC	<input type="text"/>	<b>DIMOFF</b>	<input type="text"/>

## Features & Specifications

Efficacy:	120 Lm/W
CRI:	80   90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V   347V
Driver:	0-10 1% Dim to off driver
Mounting:	Aircraft Cable

## Output Performance

Model	Watts	Lm/W	Delivered Lumens
Zip Cloud 18	20	120	2,400
	40		4,800
	60		7,200
	70		8,400
Zip Cloud 24	20	120	2,400
	40		4,800
	60		7,200
	80		9,600
Zip Cloud 36	40	120	4,800
	80		9,600
	120		14,400
	160		19,200
Zip Cloud 44	80	120	9,600
	120		14,400
	160		19,200

## Dimensions

