

Fixture: Q11: Project:	Fixture: QTY: Project:
------------------------	------------------------

Zip Eco

Suspended | Surface

LED linear. 2', 4, and 8' length options. High impact acrylic lens. Wall mountable option. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Dry and damp rated.

DLC Listed cULus Listed

Designed and manufactured in North America 5 Year Warranty









Ordering Options

Sample Configuration: ZIP - 8 - 60 - 80 - 4K - U - FR - WH - V - BFC - N - ECO

Model	Length	Watts		CRI	Col	or Temp	Vo	oltage	Ler	าร	Finis	sh	Мо	unting
ZIP	2 4 8	20, 30 20, 30, 40, 40, 60, 80,	60 100, 120, 160	80 90	3K 35K 4K 5K	3000K 3500K 4000K 5000K		120/277V 347/480V	FR	Frosted	WH	White		V Hooks Surface <i>ional</i> Continuous Run
ZIP									FR		WH			
Wiring			Accessories	5					Тур	е				
BFC Black Flexible Cord			N None						ECC)				
	/hite Flexible (nternal	Optional	Optional											
10kV 10kV WG Wire RFL Refle EM Eme MICRO Micr				r Integor -Ex				٦						
									EC	0				

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.



Features & Specifications

Zip 2: 142 Lm/W | Zip 4: Up to 155 Lm/W | Zip 8: Up to 158 Lm/W Efficacy:

CRI:

Color Temperature: 3000K, 3500K, 4000K, 5000K Lumen Maintenance: 200,000+ Life Hours (L70)

Voltage: 120/277V | 347V

Operating Temperature: -35°C to +45°C | -31°F to +113°F

Controls: 0-10V Dimming

Mounting: V Hook, Surface Mount

Accessories: Occupancy Sensor (on/off), Emergency Battery, 10kV Surge Protection, Wire Guard, Reflector,

Microwave Sensor (external)

Output Performance at 4K

Model	Watts	Lm/W	Delivered Lumens
Zip 2 20	20.63	141.88	2,927
Zip 2 30	30.95	141.87	4,391

Model	Watts	Lm/W	Delivered Lumens
Zip 4 20	18.90	150.26	2,840
Zip 4 30	29.08	153.30	4,458
Zip 4 40	39.26	154.74	6,075
Zip 4 60	59.14	152.96	9,046

Model	Watts	Lm/W	Delivered Lumens
Zip 8 40	39.26	157.62	6,188
Zip 8 60	59.24	155.09	9,172
Zip 8 80	79.26	154.67	12,259
Zip 8 100	99.38	154.42	15,346
Zip 8 120	119.26	154.42	18,416


Dimensions

2.352"



2.210"








Wire Guard




Reflector Option



Note: Zip 2 - Please contact factory

Zip 4

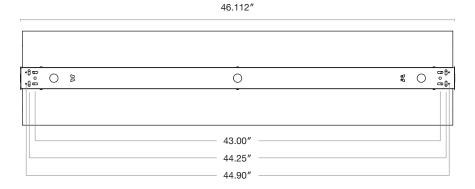

Zip 8

