

Fixture: _____ QTY: _____ Project : _____

Zip

Suspended | Surface



LED linear. 2', 4, and 8' length options. Wall mountable option. Polycarbonate and acrylic lens options. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Dry and damp rated.

DLC Listed
cULus Listed

Designed and manufactured in North America
5 Year Warranty



Ordering Options

Sample Configuration: ZIP - 8 - 60 - 80 - 4K - U - FR - WH - V - BFC - N

Model	Length	Watts	CRI	Color Temp	Voltage	Lens	Finish
ZIP	2	20, 30	80	3K 3000K	U 120/277V	FR Frosted	WH White
	4	20, 30, 40, 60, 80, 100	90	35K 3500K	H 347V	Optional	
	8	40, 60, 80, 100, 120	4K 4000K	5K 5000K	CL Clear		
					PC Polycarbonate		

ZIP WH

Mounting

- V V Hooks
- SU Surface
- Optional*
- CR Continuous Run

Wiring

- BFC Black Flexible Cord
- WFC White Flexible Cord
- IN Internal

Accessories

- N None
- Optional*
- OCC Occupancy Sensor (on/off)
- 10kV 10kV Surge Protection
- WG Wire Guard
- RFL Reflector
- EM Emergency Driver Integral Programmable
- MICRO Microwave Sensor -External (with BLD and Daylight Harvesting options)

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Features & Specifications

Efficacy:	Zip 2: Up to 142 Lm/W Zip 4: Up to 155 Lm/W Zip 8: Up to 158 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-35°C to +45°C -31°F to +113°F
Controls:	0-10V Dimming
Mounting:	V Hook, Surface Mount
Accessories:	Occupancy Sensor(on/off), Ultrasonic BLD Sensor, Integral Programmable Microwave Sensor, Emergency Battery, 10kV Surge Protection, Wire Guard, Reflector

Output Performance at 4K

Model	Watts	Lm/W	Delivered Lumens
Zip 2 20	20.63	141.88	2,927
Zip 2 30	30.95	141.87	4,391


Model	Watts	Lm/W	Delivered Lumens
Zip 8 40	39.26	157.62	6,188
Zip 8 60	59.24	155.09	9,172
Zip 8 80	79.26	154.67	12,259
Zip 8 100	99.38	154.42	15,346
Zip 8 120	119.26	154.42	18,416

Model	Watts	Lm/W	Delivered Lumens
Zip 4 20	18.90	150.26	2,840
Zip 4 30	29.08	153.30	4,458
Zip 4 40	39.26	154.74	6,075
Zip 4 60	59.14	152.96	9,046
Zip 4 80	79.26	153.28	12,149
Zip 4 100	99.20	153.74	15,251


Note: Zip 8 100 - 120/277V Only

Note: Zip 4 100 - 120/277V Only

Dimensions

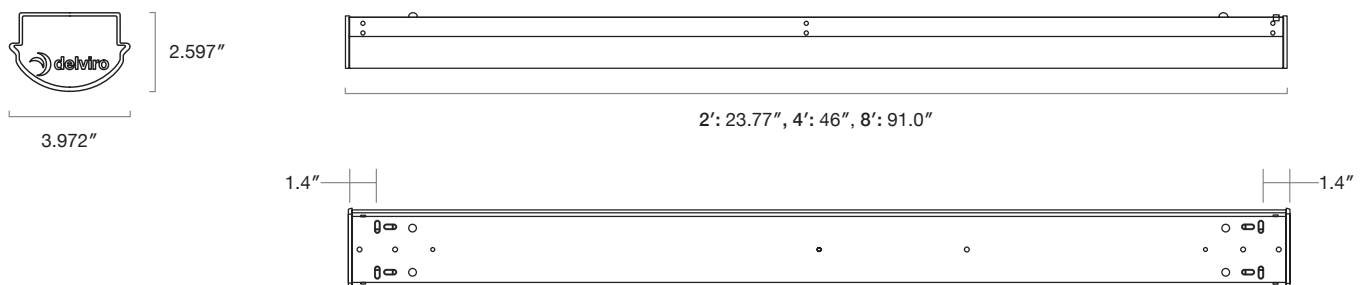

Photometrics

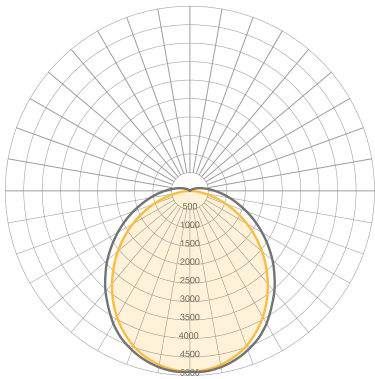

Zip 4 100 3K
Frosted Lens

ZONAL LUMEN SUMMARY

Zone	Lumens	% of Fixture
0° - 30°	3781	26%
0° - 60°	10647	73%
0° - 90°	14099	96%
90° - 120°	523	4%
90° - 150°	565	4%
90° - 180°	565	4%
0° - 180°	14665	100%
20° - 50°	6713	46%

ZONAL LUMEN SUMMARY

Zone	Lumens
0° - 10°	471
10° - 20°	1325
20° - 30°	1986
30° - 40°	2344
40° - 50°	2384
50° - 60°	2138
60° - 70°	1682
70° - 80°	1132
80° - 90°	638
90° - 100°	313
100° - 110°	147
110° - 120°	63
120° - 130°	26
130° - 140°	11
140° - 150°	4
150° - 160°	1
160° - 170°	0
170° - 180°	0