

Fixture: _____ QTY: _____ Project : _____

Zoom Eco

High Bay

Heavy duty construction. One piece die cast aluminum fixture provides maximum heat dissipation. Cooling fins added to increase the ambient temperature to 50°C standard. Built in heat sink.

Quick disconnected cable feature quickly separates the driver from the LED module for easy maintenance.

Perfect lighting solution for retail, industrial, commercial, and architectural applications.

5 Year Warranty



Ordering Options

Sample Configuration: ZOOM ECO - 150 - 80 - 5K - U - FL - WH - H - BFC - FG

Model	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting
ZOOM ECO	150 180 240	80 90	5K 5000K	U 120/277V	FL Flat Lens AL Aluminum Reflector AC Acrylic Reflector	WH White	H Hook PM Pendant
ZOOM ECO	<input type="text"/>	<input type="text"/>	5K	U	<input type="text"/>	WH	<input type="text"/>

Cord Color

BFC Black Flexible Cord
WFC White Flexible Cord

Accessories

FG Flat Glass
CLF 16" Conical Lens Flat
CLD 16" Conical Lens Deep
WG Wire Guard

Note:

Additional finishes: *Please consult factory for additional finishes*
Voltage: *Please consult factory for additional voltages*



Product Highlights

Efficacy:	Up to 136 Lm/W
CRI:	80 90
Color Temperature:	5000K
Lumen Maintenance:	75,000+ Life Hours (L70)
Voltage:	120/277V
Operating Temperature:	-40°C to +50°C -40°F to +122°F
Mounting:	Hook, Pendant
Accessories:	Flat Glass, Conical Lens, Deep Conical Lens, Wire Guard

Output Performance

Model	Watts	Lm/W	Delivered Lumens
Zoom 150	150	132	19,800
Zoom 180	180	136	24,480
Zoom 240	240	129	30,960

Dimensions

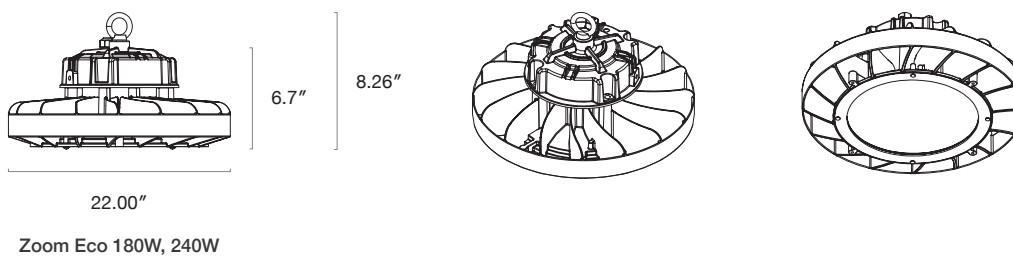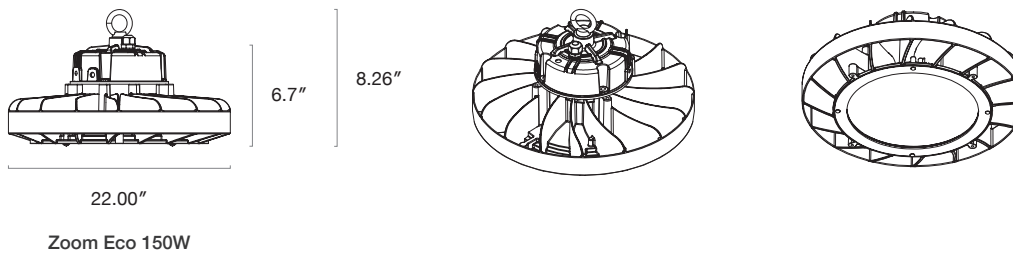

Lens Options



Acrylic Reflector



Aluminum Reflector



Flat Glass

Black Finish Shown - *Please consult factory*

Accessories



16" Flat Glass
w/ Clamp Band



16" Conical Lens
w/ Clamp Band



16" Deep - Conical Lens
w/ Clamp Band



16" Wire Guard