

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project: \_\_\_\_\_

# Thinline Arch Square

## Suspended Direct | Direct/Indirect

Architectural luminaire. Contemporary design. Aluminum housing. Square profile. Pendant mounting. Direct and Direct-Indirect distribution options. 4' and 6' lengths. Frosted lens. Multiple finishes.

cULus Listed

Designed and manufactured in North America  
5 Year Warranty



### Ordering Options

Sample Configuration: DTL ARCH SQ - 4 - 2.5 - 2.5 - 90 - 4K - 4K - U - FR - GRY - AC - DIMOFF - N - 1 - N - 5WIRE - CL - 8 - WH

Model	Length	Direct Watts/ft	Indirect Watts/ft	CRI	Color Temp	Voltage	Lens (Direct-Indirect)
DTL ARCH SQ	4	2.5	2.5	80	3K 3000K	U 120/277V	FR Frosted
	6	3.5	3.5	90	35K 3500K	H 347V	
		5	5	4K 4000K			
		7.5	7.5	5K 5000K			
		10	10				

DTL ARCH SQ

Finish	Mounting	Driver	Controls
<b>WH</b> Grey <b>BLK</b> White <b>GRY</b> Black <b>CU</b> Custom  - Consult factory for custom finishes	<b>AC</b> Aircraft Cable 10' (std)	<b>DIMOFF</b> 0-10 DIMOFF  <i>Optional</i> <b>DALI</b> <b>LUTRON</b> Lutron Ecosystem <b>SR</b> Philips SR <b>ELDO</b> .1% ELDO (347 only 1-10 5%)	<b>N</b> None  <i>Optional - External to the fixture due to the nature of the fixture</i> <b>DMX</b> <b>SNS</b> Philips SNS 300 w/BLD & Daylight <b>CLM</b> Encelium CLM <b>LG</b> LG Dongle <b>BT</b> Bluetooth Mesh <b>EN</b> Enlighted Integral

**AC**

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
<b>1</b> 1 Circuit <b>2</b> 2 Circuits	<b>N</b> None  <i>Optional</i> <b>10kV</b> 10kV Surge Protection <b>EM</b> Emergency Battery <b>+GTD</b> Generator Transfer Device  <b>Note:</b> - For Emergency Battery (EM), minimum length is 4' (direct distribution), 6' (indirect distribution)	<b>5 WIRE</b> 5 Wire (std)  <i>Optional</i> <b>N</b> 5 Leads <b>6 WIRE</b> 6 Wire - Cable (EM - emergency battery option)	<b>CL</b> Clear  <i>Optional</i> <b>B</b> Black <b>W</b> White	<b>Length(Ft)</b>  <b>WH</b> White <b>BLK</b> Black <b>CU</b> Custom  - Consult factory for custom finishes	


### Specifications

Efficacy:	75 Lm/W
CRI:	80   90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V   347V
Operating Temperature:	-20°C to +40°C   -4°F to +104°F
Controls:	0-10V Dimming
Mounting:	Aircraft Cable

### Output Performance


Distribution	Watts/FT	Delivered Lumens
Direct	2.5	187.5
	3.5	262.5
	5	375
	7.5	562.5
	10	750
Indirect	2.5	187.5
	3.5	262.5
	5	375
	7.5	562.5
	10	750

### Lens Options - Direct Distribution





Standard  
Frosted

### Lens Options - Indirect Distribution



Standard  
Frosted

### Dimensions

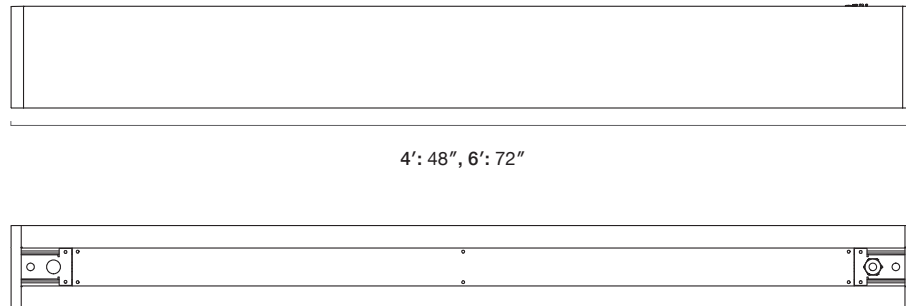

### Finish Options

#### Standard Finishes



Grey  
RAL 7046  
Sandtex



White  
RAL 9003  
Sandtex



Black  
RAL 9004  
Sandtex

#### Custom Finishes



Orange  
RAL 2009  
Sandtex



Green  
RAL 6010  
Sandtex



Blue  
RAL 5012  
Sandtex



Yellow  
RAL 1037  
Sandtex

Additional finishes - *Please contact factory*