

Fixture: _____ QTY: _____ Project : _____


Thinline SPK

Recessed with Spackle

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Recessed lighting with spackle. 2.25", 3.18", and 4.5" widths. Continuous runs available. L90>70K hours.

cULus Listed

Designed and manufactured in North America
5 Year Warranty

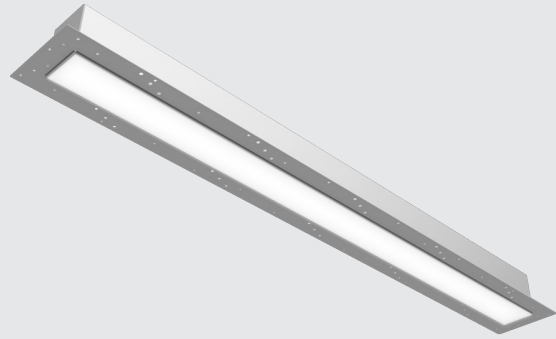

Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Model: Thinline 3.18

Ordering Options

Sample Configuration: DTL REC SPK - 3.18 - 8 - 90 - 4K - U- FR - WH- DIMOFF - N - N - N

Model	Width	Continuous Run	Direct Lm/ft	CRI	Color Temp	Voltage
DTL REC SPK	2.25	CR _____	D 250	80	27K 2700K	U 120/277V
	3.18	Min 2Ft (1Ft increments, Unibody up to 8Ft))	D 500	90	3K 3000K	H 347V
	4.5	Optional - Available in 6in increments	D 750 D 1000 D _____ (custom up to 1200)		35K 3500K 4K 4000K 5K 5000K	

DTL REC SPK

Lens	Finish	Driver	Controls
FR Frosted Flat	WH White	DIMOFF 0-10V DIMOFF	N None
<i>Optional</i>		<i>Optional</i>	<i>Optional</i>
FRREG Frosted Regressed		DALI	DMX
ASY Asymmetric Clear		LUTRON Lutron Ecosystem	SNS Philips SNS 300 w/BLD & Daylight
0.5 FRDRP 0.5" Frosted Drop Lens		SR Philips SR	CLM Encelium CLM
1.5 FRDRP 1.5" Frosted Drop Lens		ELDO .1% ELDO (347 only 1-10 5%)	LG LG Dongle
LVR Louver LensEnlighted Integral			BT Bluetooth Mesh
			EN Enlighted Integral

WH

Accessories

N None

Optional

10kV 10kV Surge Protection

EM Emergency Battery

Note: - For Emergency Battery (EM), minimum length is 4'

LED

L90>70,000

Samsung 301 3-Step MacAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%


Lens Options




Standard
Frosted Flat




Frosted
0.25" Regressed



Asymmetric
Clear




0.5" Drop Lens



1.5" Drop Lens

Dimensions

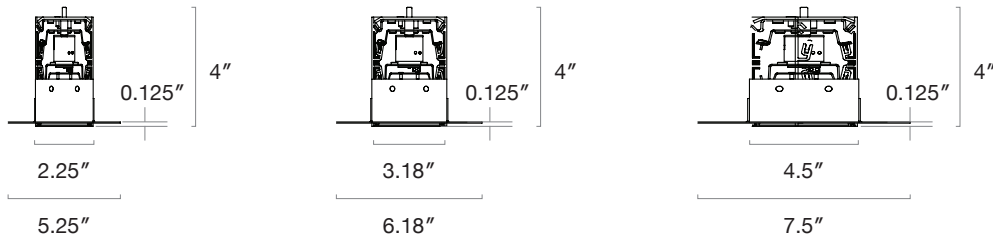

2': 27.2", 3': 39.2", 4': 51.2", 5': 63.2", 6': 75.2", 7': 87.2", 8': 99.2"

Note: Dimensions are for reference only. Please make measurements for actual dimensions

Mounting

