

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_


# Thinline Surface

## Surface | Wall Mount

Architectural luminaire. Contemporary and minimal design. Square profile. Surface and wall mounting. Aluminum extruded body. Cast end caps with light block. Continuous runs available.

cULus Listed

Designed and manufactured in North America  
5 Year Warranty

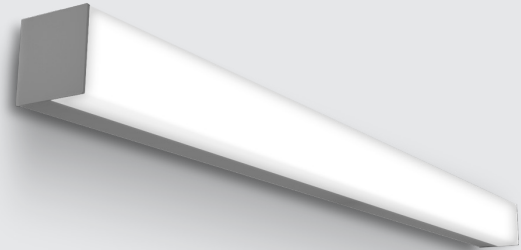

### Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Model: DTL Square Wall Mount

### Ordering Options

Sample Configuration: DTL SQR - 8 - D500 - 90 - 4K - U - 1.5 DRL - WH - SU - DIMOFF - N - N - N

Model	Continuous Run	Direct Lm/ft	CRI	Color Temp	Voltage	Lens	Finish
<b>DTL SQR</b>	<b>CR</b> _____ <b>Min 2Ft</b> (1Ft increments, Unibody up to 8Ft)  <i>Optional</i> - Available in 6in increments	<b>D 250</b> <b>D 500</b> <b>D 750</b> <b>D 1000</b> <b>D</b> _____ (custom up to 1200)	<b>80</b> <b>90</b>	<b>27K</b> 2700K <b>3K</b> 3000K <b>35K</b> 3500K <b>4K</b> 4000K <b>5K</b> 5000K	<b>U</b> 120/277V <b>H</b> 347V	<b>1.5 DRL</b> 1.5" Drop Lens	<b>WH</b> White <b>BLK</b> Black <b>GRY</b> Grey <b>CU</b> Custom  - Consult factory for custom finishes

**DTL SQR**      **1.5 DRL**

Mounting	Driver	Controls	Accessories
<b>SU</b> Surface <b>WM</b> Wall Mount	<b>DIMOFF</b> 0-10V DIMOFF  <i>Optional</i> <b>DALI</b> <b>LUTRON</b> Lutron Ecosystem <b>SR</b> Philips SR <b>ELDO</b> .1% ELDO (347 only 1-10 5%)	<b>N</b> None  <i>Optional</i> <b>DMX</b> <b>SNS</b> Philips SNS 300 w/BLD & Daylight <b>CLM</b> Encelium CLM <b>LG</b> LG Dongle <b>BT</b> Bluetooth Mesh <b>EN</b> Enlighted Integral	<b>N</b> None  <i>Optional</i> <b>10kV</b> 10kV Surge Protection <b>EM</b> Emergency Battery  <b>Note: - For Emergency Battery (EM), minimum length is 4'</b>

### Wiring

**N** 5 Leads

*Optional*

**5 WIRE** 5 Wire  
**6 WIRE** 6 Wire - Cable (EM - emergency battery option)

### LED

L90>70,000

Samsung 301 3-Step McAdam Binning



4000K 120 Lm/W

3500K 98%



3000K 96%

90 CRI 85%

### Lens




### Dimensions



2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"


Actual Length = Nominal +.2"

### Mounting



Surface

1/4"-20 Thread Required



Wall Mount

1/4"-20 Thread Required

### Finish Options

#### Standard Finishes



Grey  
RAL 7046  
Sandtex



White  
RAL 9003  
Sandtex



Black  
RAL 9004  
Sandtex

#### Custom Finishes



Orange  
RAL 2009  
Sandtex



Green  
RAL 6010  
Sandtex



Blue  
RAL 5012  
Sandtex



Yellow  
RAL 1037  
Sandtex

Additional finishes - Please contact factory