


Fixture: _____ QTY: _____ Project : _____

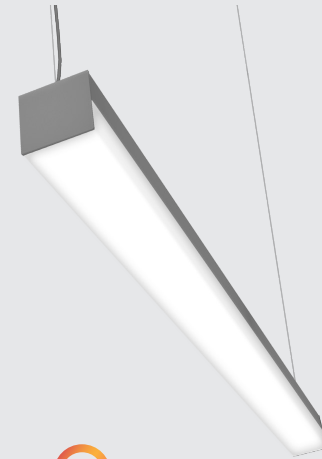

Thinline Square

Suspended Direct

Architectural luminaire. Contemporary and minimal design. Square profile. Pendant mounting. Aluminum extruded body. Cast end caps with light block. Continuous runs available.

cULus Listed

Designed and manufactured in North America
5 Year Warranty

Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Ordering Options

Sample Configuration: DTL SQR - 8 - D500 - 90 - 4K - U - 1.5 DRL - WH - AC - DIMOFF - N - CL - 8 - WH

Model	Continuous Run	Direct Lm/ft	CRI	Color Temp	Voltage	Lens	Finish
DTL SQR	CR _____ Min 2Ft (1Ft increments, Unibody up to 8Ft)	D 250 D 500 D 750 D 1000 D _____	80 90	27K 2700K 3K 3000K 35K 3500K 4K 4000K 5K 5000K	U 120/277V H 347V	1.5 DRL 1.5" Drop Lens	WH White BLK Black GRY Grey CU Custom
	<i>Optional</i> - Available in 6in increments	(custom up to 1200)					- Consult factory for custom finishes
DTL SQR	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	1.5 DRL	<input type="text"/>

Mounting	Driver	Controls	Accessories
AC Aircraft Cable <i>Optional</i>	DIMOFF 0-10V DIMOFF <i>Optional</i>	N None <i>Optional</i>	N None <i>Optional</i>
STB 9/16 9/16 T-Bar Clip STB 15/16 15/16 T-Bar Clip	DALI LUTRON SR Lutron Ecosystem Philips SR ELDO .1% ELDO (347 only 1-10 5%)	DMX SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral	10kV 10kV Surge Protection EM Emergency Battery Note: - For Emergency Battery (EM), minimum length is 4'
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Wiring	Wire Color	Wire Length	Canopy Color
5 WIRE 5 Wire (std) <i>Optional</i>	CL Clear <i>Optional</i>	Length(Ft)	WH White BLK Black CU Custom
N 5 Leads 6 WIRE 6 Wire - Cable (EM - emergency battery option)	B Black W White		- Consult factory for custom finishes
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

LED

L90>70,000

Samsung 301 3-Step MacAdam Binning



4000K 120 Lm/W

3500K 98%



3000K 96%

90 CRI 85%

Lens




Dimensions

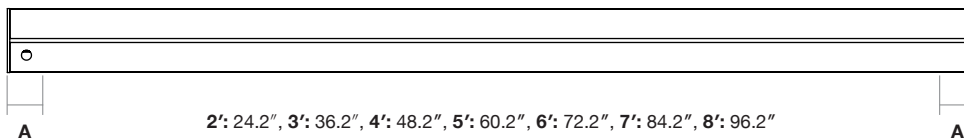


Actual Length = Nominal +.2"

A - Adjustable Distance 3" Standard
(custom distances available)

Mounting

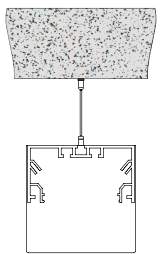

Solid Mounting

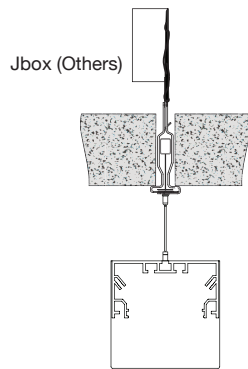

T-Bar 9/16" | 15/16"
Aircraft Cable (ACY)

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - *Please contact factory*