

Fixture: _____ QTY: _____ Project : _____


Thinline Suspended

Direct | Direct/Indirect | Indirect

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Pendant mounting. Cast end caps with light block. Direct, direct-indirect, and indirect distribution options. 2.25", 3.18", and 4.5" widths. Continuous runs available.

cULus Listed

Designed and manufactured in North America
5 Year Warranty

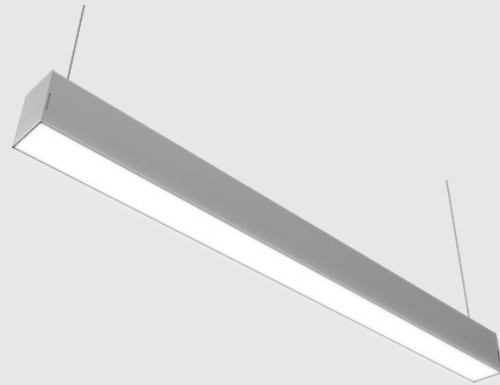

Model: Thinline 3.18

Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Ordering Options

Sample Configuration: DTL S D - 3.18 - 8 - D500 - I 250 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 1 - N - 5WIRE -CL - 8 - W

Model	Width	Continuous Run	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage
DTL S D	2.25	CR _____	D 250	I 250	80	27K 2700K	U 120/277V
DTL S DI	3.18	Min 2Ft (1Ft increments, Unibody up to 8Ft)	D 500	I 500	90	3K 3000K	H 347V
DTL S I	4.5		D 750	I 750		35K 3500K	
		Optional	D 1000	I 1000		4K 4000K	
SD - Suspended Direct		- Available in 6in increments	D _____ (custom up to 1200)	I _____ (custom up to 1200)		5K 5000K	

--	--	--	--	--	--	--

Direct Lens	Indirect Lens	Finish	Mounting	Driver
FR Frosted Flat	FR Frosted	WH White	AC Aircraft Cable 10' Std	DIMOFF 0-10V DIMOFF
<i>Optional</i>	<i>Optional</i>	BLK Black	<i>Optional</i>	<i>Optional</i>
FFREG Frosted Regressed	ASY Asymmetric Clear	GRY Grey	TR Threaded Rod _____	DALI Lutron Ecosystem
ASY Asymmetric Clear	BATWING Batwing	CU Custom	TB9/16 T-Bar 9/16 Clip	LUTRON Philips SR
0.5 FRDRP 0.5" Frosted Drop Lens		- Consult factory for custom finishes	TB15/16 T-Bar 15/16 Clip	ELDO .1% ELDO (347 only 1-10.5%)
1.5 FRDRP 1.5" Frosted Drop Lens			- For threaded rod, please specify length	
LVR Louver Lens				

--	--	--	--	--

Controls	Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Finish
N None	1 1 Circuit	N None	5 WIRE 5 Wire (std)	CL Clear	Length(Ft)	WH White
<i>Optional</i>	2 2 Circuits	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>		BLK Black
DMX		10kV 10kV Surge Protection	N 5 Leads	B Black		CU Custom
SNS Philips SNS 300 w/BLD & Daylight		EM Emergency Battery	6 WIRE 6 Wire - Cable (EM - emergency battery option)	W White		- Consult factory for custom finishes
CLM Encelium CLM		+GTD Generator Transfer Device				
LG LG Dongle		Note: - For Emergency Battery (EM), minimum length is 4' (direct distribution), 6' (indirect distribution)				
BT Bluetooth Mesh						
EN Enlighted Integral						

--	--	--	--	--	--	--

LED

L90>70,000

Samsung 301 3-Step MacAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%


Lens Options - Direct Distribution




Standard
Frosted Flat




Frosted
0.25" Regressed



Asymmetric
Clear




0.5" Drop Lens




1.5" Drop Lens


Lens Options - Indirect Distribution



Standard
Frosted




Asymmetric



Batwing

Dimensions



2.25"



3.18"




4.5"




2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"

Actual Length = NOMINAL +.2"

Mounting Options

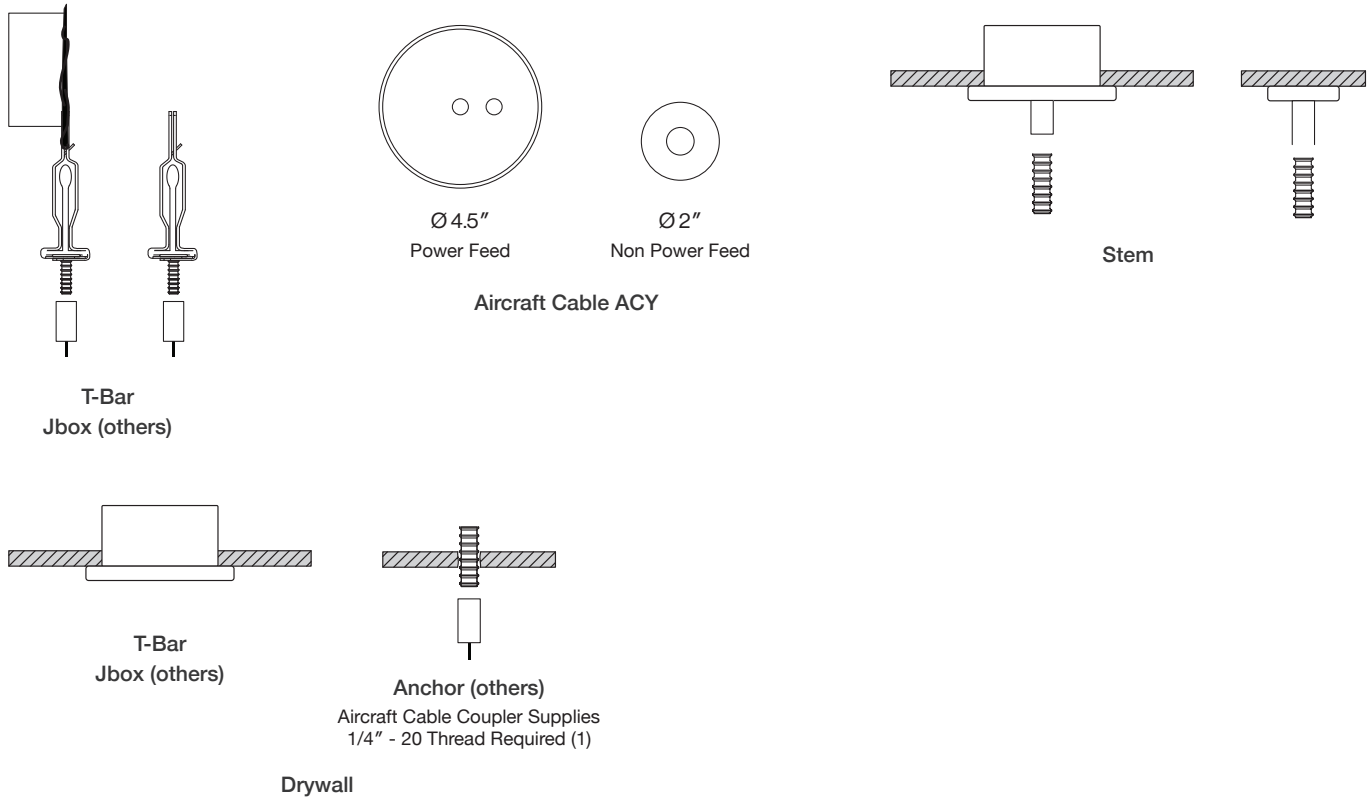

Mounting Locations

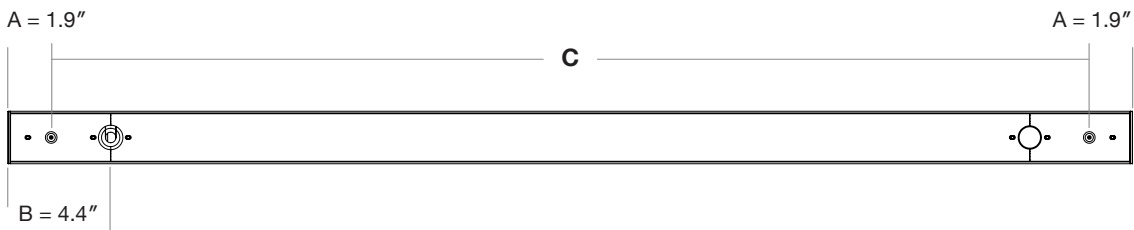

Model	Lengths - C
DTL 2	20.5"
DTL 3	32.5"
DTL 4	44.5"
DTL 5	56.5"
DTL 6	68.5"
DTL 7	80.5"
DTL 8	92.5"

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - Please contact factory