

Fixture: _____ QTY: _____ Project : _____

Thinline Wall Mount

Direct | Direct/Indirect | Indirect

Architectural luminaire. Wall mount lighting. Contemporary and minimal design. Aluminum extruded body. Cast end caps with light block. Direct, direct-indirect, and indirect distribution options. 2.25", 3.18", and 4.5" widths. Continuous runs available.

cULus Listed

Designed and manufactured in North America

5 Year Warranty



Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Model: Thinline 3.18 Direct-Indirect

Ordering Options

Sample Configuration: DTL WM DI - 3.18 - 8 - D500 - I500 - 80 - 4K - U - FR - FR - GRY - S - DIMOFF - N - 2 - N

Model	Width	Continuous Run	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp
DTL WM D	2.25	CR _____	D 250	I 250	80	27K 2700K
DTL WM DI	3.18	Min 2Ft (1Ft increments, Unibody up to 8Ft))	D 500	I 500	90	3K 3000K
DTL WM I	4.5		D 750	I 750		35K 3500K
		<i>Optional</i>	D 1000	I 1000		4K 4000K
<i>WM D - Wall Mount Direct</i>		<i>- Available in 6in increments</i>	D _____ (custom up to 1200)	I _____ (custom up to 1200)		5K 5000K

--	--	--	--

Voltage	Direct Lens	Indirect Lens	Finish	Mounting
U 120/277V H 347V	FR Frosted Flat <i>Optional</i> FFREG Frosted Regressed ASY Asymmetric Clear 0.5 FRDRP 0.5" Frosted Drop Lens 1.5 FRDRP 1.5" Frosted Drop Lens LVR Louver Lens	FR Frosted Flat <i>Optional</i> ASY Asymmetric Clear BATWING Batwing	WH White BLK Black GRY Grey CU Custom <i>- Consult factory for custom finishes</i>	WM Wall Mount Bracket <i>Optional</i> 12EX 12" Extended Arm

--	--	--	--

Driver	Controls	Circuits	Accessories	Wiring
DIMOFF 0-10V DIMOFF <i>Optional</i> DALI LUTRON Lutron Ecosystem SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None <i>Optional</i> DMX SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral	1 1 Circuit 2 2 Circuits	N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battey +GTD Generator Transfer Device <i>Note: - For Emergency Battery (EM), minimum length is 4' (direct distribution), 6' (indirect distribution)</i>	N 5 Leads <i>Optional</i> 5 WIRE 5 Wire 6 WIRE 6 Wire - Cable (EM - emergency battery option)

--	--	--	--

LED

L90>70,000

Samsung 301 3-Step MacAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%


Lens Options - Direct Distribution




Standard
Frosted Flat




Frosted
0.25" Regressed



Asymmetric
Clear




0.5" Drop Lens




1.5" Drop Lens


Lens Options - Indirect Distribution



Standard
Frosted




Asymmetric
Clear




Batwing

Dimensions



2.25"



3.18"



4.5"




2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"


Actual Length = NOMINAL +.2"

Mounting

Wall Mount Bracket

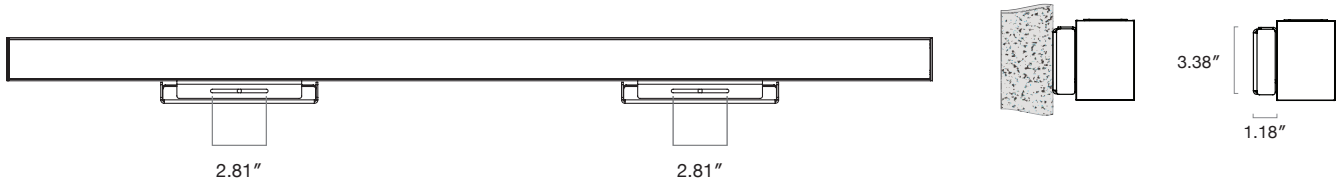


This is the central position of the wall mount bracket.
It can be adjusted Left/Right by 1.4". Secure light fixture using #8-32 screws (2x).

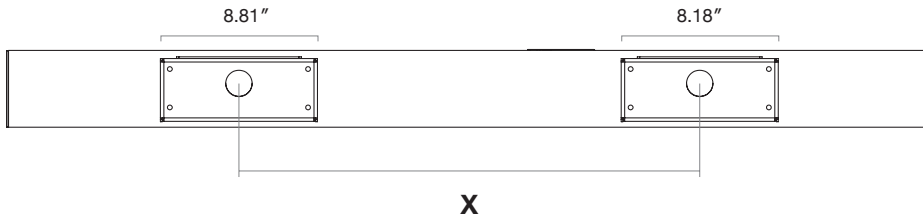

Mounting Locations

Model	Mounting Reference	Mounting Bracket (QTY)
DTL 2	Centerline	1
DTL 3		1
DTL 4	8" From Fixture Ends	2
DTL 5		2
DTL 6		2
DTL 7	Centerline & 8" From Fixture Ends	3
DTL 8		3

12" Extended Arm

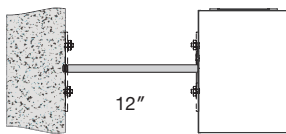

Finish Options

Standard Finishes



Grey
RAL 7046
Sandtex



White
RAL 9003
Sandtex



Black
RAL 9004
Sandtex

Custom Finishes



Orange
RAL 2009
Sandtex



Green
RAL 6010
Sandtex



Blue
RAL 5012
Sandtex



Yellow
RAL 1037
Sandtex

Additional finishes - Please contact factory