

Fixture: _____ QTY: _____ Project : _____


Thinline Spot Linear

Direct | Direct/Indirect

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Pendant mounting. Cast end caps with light block. Spot lights at start, middle, and end positions. Spot light driver 0-10V dimming. Direct and direct-indirect distribution. Universal 120/277 voltage. 4.5" wide. 2' - 8' Lengths. Dry and damp rated.

cULus Listed

Designed and manufactured in North America
5 Year Warranty

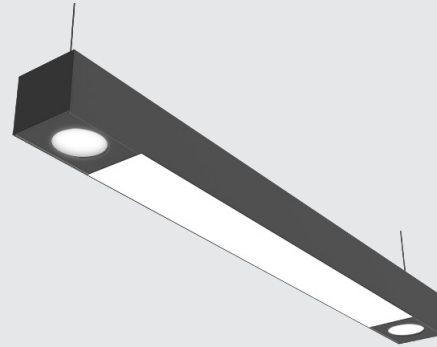

Performance

LED: 4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W

SPOTS: 4000K - 166 Lm/W | 3500K - 165 Lm/W | 3000K - 161 Lm/W

Ordering Options

Sample Configuration: DTL SPL SD 8 - 10W - SME - D 500 - I 500 - 80 - 4K - M - FR - FR - WH - AC - DIMOFF - N - 1 - N - 5WIRE - CL - 10 - WH

Model	Lengths (Ft)	Watts (Spot)	Spots (Position)	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp
DTL SPL SD	2' - 8'	10W	SE Start, End	D 250	I 250	80	27K 2700K
DTL SPL SDI	(1' increments)	15W	SME Star, Middle, End	D 500	I 500	90	3K 3000K
<i>SD - Suspended Direct</i>				D 750	I 750		35K 3500K
<i>SDI - Suspended Dir-Ind</i>				D 1000	I 1000		4K 4000K
<i>Note: - SME for 6' - 8' Lengths only</i>				D _____ (custom up to 1200)	I _____ (custom up to 1200)		5K 5000K

--	--	--	--	--	--	--	--

Spot Reflector	Direct Lens	Indirect Lens	Finish	Mounting	Driver - Linear
N Narrow - 20°	FR Frosted Flat	FR Frosted	WH White	AC Aircraft Cable 10' (Std)	DIMOFF 0-10V DIMOFF
M Medium - 30°			BLK Black		
W Wide - 50°			GRY Grey	Optional	Optional
		Optional	CU Custom	TR Threaded Rod	DALI Digital Addressable
		ASY Asymmetric Clear		TB9/16 T-Bar 9/16 Clip	Lighting Interface
		BW Batwing	- For custom finishes please specify RAL number	TB15/16 T-Bar 15/16 Clip	LUTRON Lutron Ecosystem
			- See Finish Options	- For threaded rod, please specify length	Philips SR
					ELDO .1% ELDO (347 only 1-10 5%)

	FR				
--	----	--	--	--	--

Controls	Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Finish
N None	1 1 Circuit	N None	5 WIRE 5 Wire (Std)	CL Clear	Length(Ft)	WH White
Optional	2 2 Circuits	Optional	Optional	Optional		BLK Black
DMX Digital Multiplex		10kV 10kV Surge Protection	N 5 Leads	B Black		CU Custom
SNS Philips SNS 300 w/BLD & Daylight		EM Emergency Battery	6 WIRE 6 Wire - Cable (EM - emergency battery option)	W White		- For custom finishes please specify RAL number
CLM Encelium CLM		+GTD Generator Transfer Device				- See Finish Options
LG LG Dongle						
BT Bluetooth Mesh						
EN Enlighted Integral						
		<i>Note: - For Emergency Battery (EM), minimum length is 4' (direct distribution), 6' (indirect distribution)</i>				

--	--	--	--	--	--	--

LED

L90>70,000

Samsung 301 3-Step MacAdam Binning

4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%

Output Performance - Spotlight


Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 10	11.4	2700K	80	151	1,732
	11.4	3000K	80	161	1,840
	11.4	3500K	80	165	1,883
	11.4	4000K	80	166	1,894
	11.4	5000K	80	167	1,916
Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 15	16.3	2700K	80	151	2,474
	16.3	3000K	80	161	2,628
	16.3	3500K	80	165	2,690
	16.3	4000K	80	166	2,706
	16.3	5000K	80	167	2,737

Lens Options - Direct Distribution




Frosted Flat


Lens Options - Indirect Distribution



Standard
Frosted




Asymmetric




Batwing


Spot Beam



20° Spot Beam




30° Medium Beam




50° Wide Beam

Dimensions

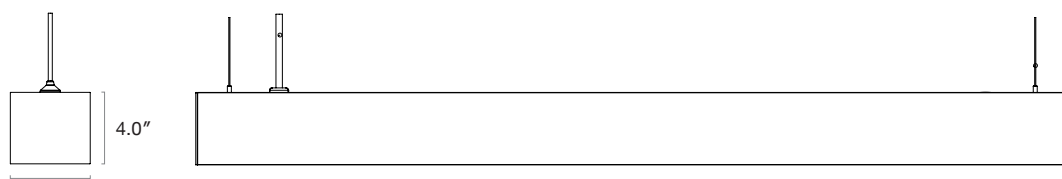


2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"

Actual Length = NOMINAL +.2"

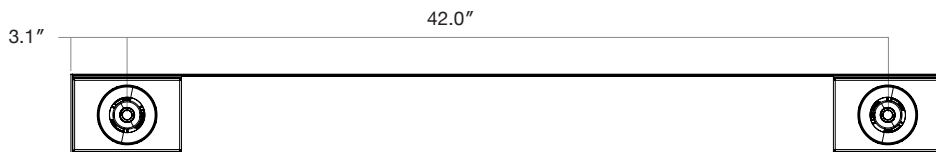


Spot Light Locations

6' - 8' Models

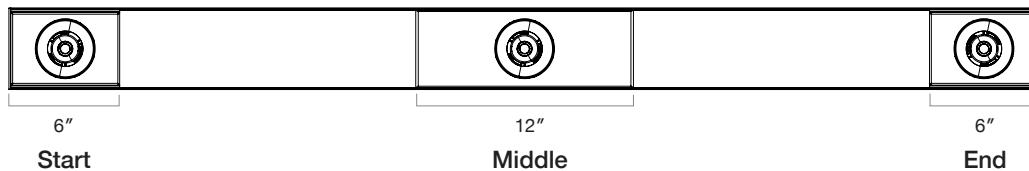

Mounting Options

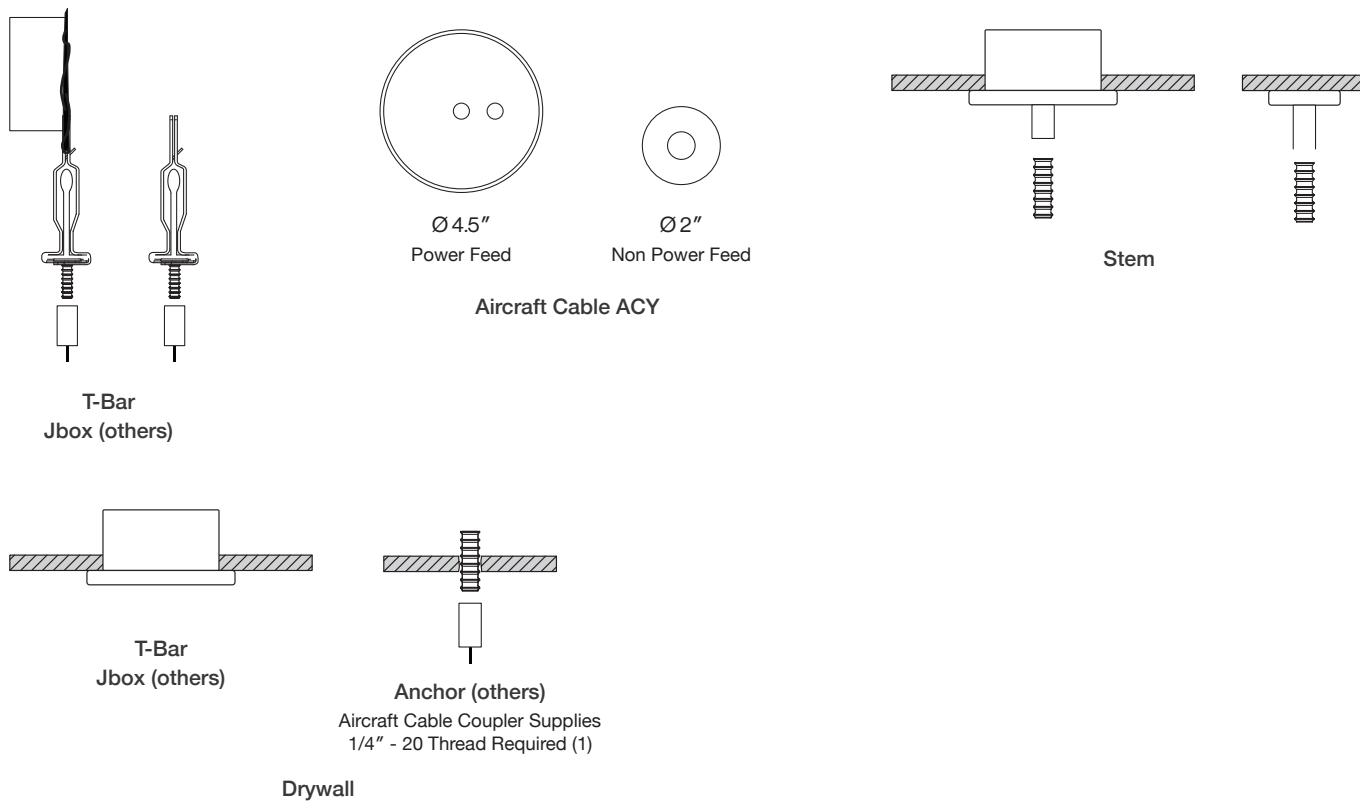

Mounting Locations



Model	Lengths - A
DTL 2	20.5"
DTL 3	32.5"
DTL 4	44.5"
DTL 5	56.5"
DTL 6	68.5"
DTL 7	80.5"
DTL 8	92.5"

Finish Options


Standard RAL Finishes



Signal White
RAL 9003




Telegrey 2
RAL 7046




Signal Black
RAL 9004


Sample Custom RAL Finishes




Traffic White
RAL 9016




Papyrus White
RAL 9018




Graphic Grey
RAL 7024



Light Grey
RAL 7035



Jet Black
RAL 9005



Graphic Black
RAL 9011




Azure Blue
RAL 5009



Gentian Blue
RAL 5010



Sky Blue
RAL 5015



Pastel Orange
RAL 2003



Pure Orange
RAL 2004



Daffodil Yellow
RAL 1007



Lemon Yellow
RAL 1012



Zinc Yellow
RAL 1018



Coral Red
RAL 3016



Rose
RAL 3017



Traffic Red
RAL 3020



Salmon Pink
RAL 3022



Olive Green
RAL 6003



Moss Green
RAL 6005



Grass Green
RAL 6010



Claret Violet
RAL 4004



Traffic Purple
RAL 4006



Pearl Blackberry
RAL 4012



Beige
RAL 1001



Nut Brown
RAL 8011



Sepia Brown
RAL 8014



Mahogany Brown
RAL 8016

Custom Finishes - Please contact factory

Additional Finishes Available - Please contact factory