

Fixture: _____ QTY: _____ Project : _____


Thinline Hexagon

Suspended Direct | Direct/Indirect

Architectural luminaire. Hexagonal shaped design. Pendant mounting. Direct and direct-indirect distribution options. 3 standards sizes. Additional sizes available. 2.25" wide. Multiple finishes available. Dry and damp rated.

cULus Listed

Designed and manufactured in North America
5 Year Warranty

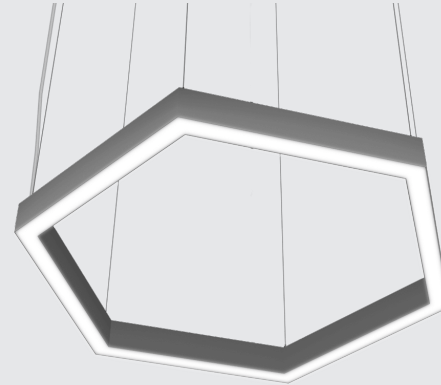

Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Ordering Options

Sample Configuration: DTL HEX - 6 x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

Model	Size	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL HEX	6 x 2FT	D 250	I 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	6 x 3FT	D 500	I 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	6 x 4FT	D 750	I 750		35K 3500K		
	- Custom Sizes Available - Please Consult Factory	D 1000	I 1000		4K 4000K		
		D _____	I _____		5K 5000K		
		(custom up to 1200)	(custom up to 1200)				

DTL HEX

Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted BATWING Batwing <i>Indirect Lens: Minimum size 6 x 2FT</i>	WH White BLK Black GRY Grey CU Custom <i>- For custom finishes please specify RAL number - See Finish Options</i>	AC Aircraft Cable 10' (Std)	DIMOFF 0-10V DIMOFF <i>Optional</i> DALI Digital Addressable Lighting Interface LUTRON Lutron Ecosystem SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None <i>Optional</i> DMX Digital Multiplex SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral

AC

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device	5 WIRE 5 Wire (Std) <i>Optional</i> N 5 Leads 6 WIRE 6 Wire - Cable (EM - Emergency Battery Option)	CL Clear <i>Optional</i> B Black W White	Length(Ft) - 6Ft (Std)	WH White BLK Black CU Custom <i>- For custom finishes please specify RAL number - See Finish Options</i>

LED

L90>70,000

Samsung 301 3-Step MacAdam Binning

4000K 120 Lm/W





3500K 98%

3000K 96%

90 CRI 85%

Lens Options - Direct Distribution

Lens Options - Indirect Distribution




Standard
Frosted Flat

Frosted
0.25" Regressed

Standard
Frosted

Batwing

Dimensions

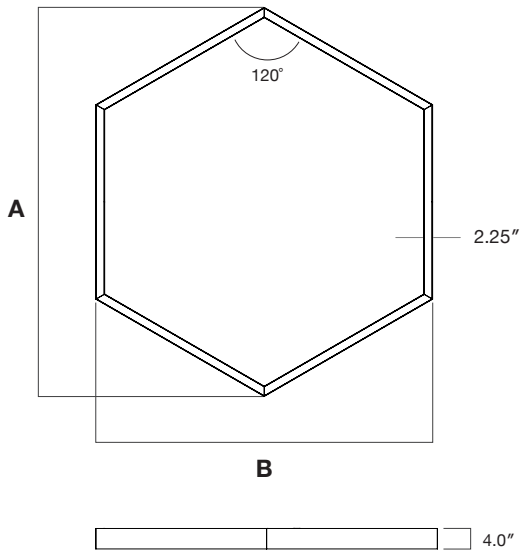


Model	A	B
6 x 2FT	51.6"	44.7"
6 x 3FT	75.6"	65.5"
6 x 4FT	99.6"	86.3"

Note:

- 6 x 2FT - 1 Piece
- 6 x 3FT - 1 Piece
- 6 x 4FT - 2 Pieces

Mounting

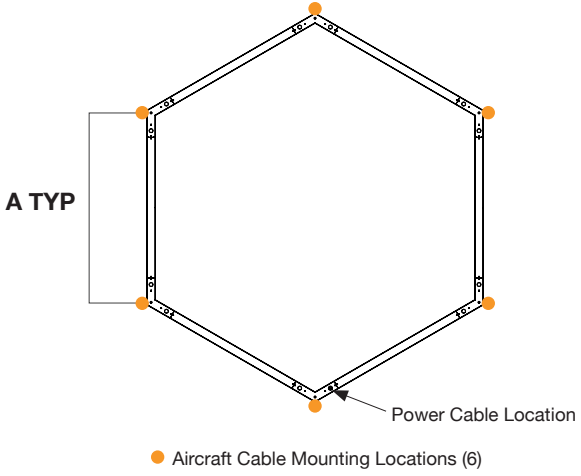

Model	A
6 x 2FT	24.5"
6 x 3FT	36.5"
6 x 4FT	48.5"

Finish Options

Standard RAL Finishes




Signal White
RAL 9003

Telegrey 2
RAL 7046

Signal Black
RAL 9004

Sample Custom RAL Finishes

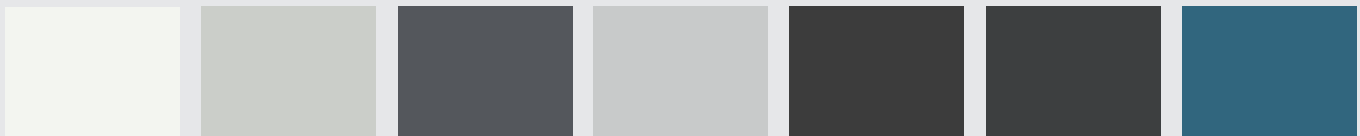

Traffic White
RAL 9016

Papyrus White
RAL 9018


Graphic Grey
RAL 7024

Light Grey
RAL 7035

Jet Black
RAL 9005

Graphic Black
RAL 9011

Azure Blue
RAL 5009

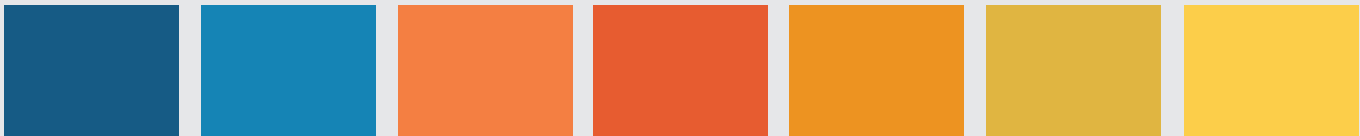

Gentian Blue
RAL 5010

Sky Blue
RAL 5015

Pastel Orange
RAL 2003

Pure Orange
RAL 2004

Daffodil Yellow
RAL 1007

Lemon Yellow
RAL 1012

Zinc Yellow
RAL 1018



Coral Red
RAL 3016

Rose
RAL 3017

Traffic Red
RAL 3020

Salmon Pink
RAL 3022

Olive Green
RAL 6003

Moss Green
RA 6005

Grass Green
RAL 6010



Claret Violet
RAL 4004

Traffic Purple
RAL 4006

Pearl Blackberry
RAL 4012

Beige
RAL 1001

Nut Brown
RAL 8011

Sepia Brown
RAL 8014

Mahogany Brown
RAL 8016

Custom Finishes - Please contact factory
Additional Finishes Available - Please contact factory