

Fixture: _____ QTY: _____ Project : _____


Thinline Octagon

Suspended Direct | Direct/Indirect | Indirect

Architectural luminaire. Octagonal shaped design. Pendant mounting.
Direct and direct-indirect distribution options. 3 standards sizes.
Additional sizes available. 2.25" wide. Multiple finishes available.
Dry and damp rated.

cULus Listed

Designed and manufactured in North America
5 Year Warranty

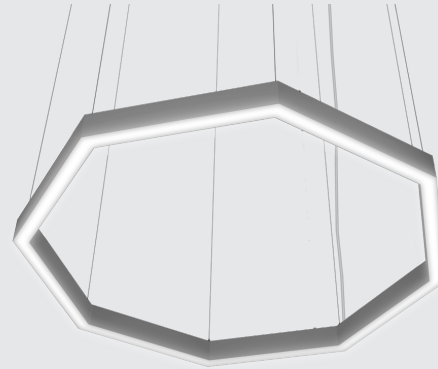

Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Ordering Options

Sample Configuration: DTL OCTA - 8 x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

Model	Size	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL OCTA	8 x 2FT	D 250	I 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	8 x 3FT	D 500	I 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	8 x 4FT	D 750	I 750		35K 3500K		
	- Custom Sizes Available - Please Consult Factory	D 1000	I 1000		4K 4000K		
		D _____	I _____		5K 5000K		

DTL OCTA

Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted BATWING Batwing	WH White BLK Black GRY Grey CU Custom	AC Aircraft Cable 10' (Std)	DIMOFF 0-10V DIMOFF	N None
<i>Indirect Lens: Minimum size 8 x 2FT</i>	<i>- For custom finishes please specify RAL number - See Finish Options</i>		<i>Optional</i> DALI Digital Addressable Lighting Interface LUTRON SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)	<i>Optional</i> DMX Digital Multiplex SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral

AC

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device	5 WIRE 5 Wire (Std) <i>Optional</i> N 5 Leads 6 WIRE 6 Wire - Cable (EM - Emergency Battery Option)	CL Clear <i>Optional</i> B Black W White	Length(Ft) - 6Ft (Std)	WH White BLK Black CU Custom <i>- For custom finishes please specify RAL number - See Finish Options</i>

LED

L90>70,000

Samsung 301 3-Step MacAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%

Lens Options - Direct Distribution




Standard
Frosted Flat




Frosted
0.25" Regressed

Lens Options - Indirect Distribution




Standard
Frosted



Batwing

Dimensions

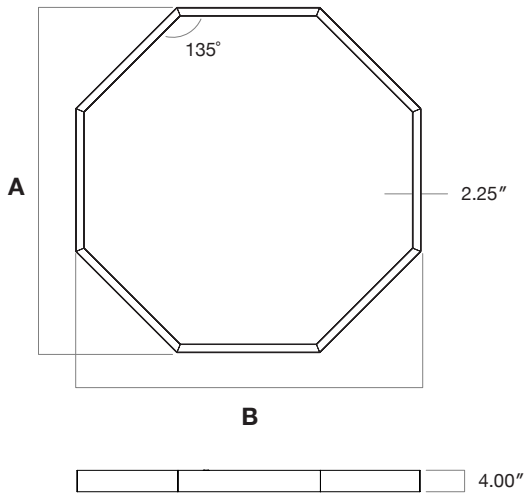


Model	A	B
8 x 2FT	61.4"	61.4"
8 x 3FT	90.4"	90.4"
8 x 4FT	119.3"	119.3"

Note:

- 8 x 2FT - 1 Piece
- 8 x 3FT - 2 Pieces
- 8 x 4FT - 4 Pieces


Mounting

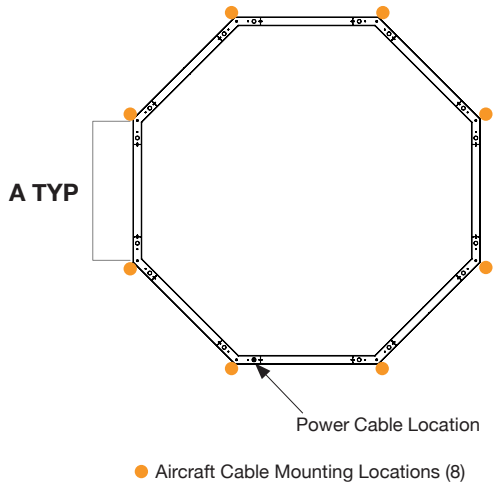

Model	A
8 x 2FT	24.5"
8 x 3FT	36.5"
8 x 4FT	48.5"

Finish Options

Standard RAL Finishes



Signal White
RAL 9003




Telegrey 2
RAL 7046




Signal Black
RAL 9004


Sample Custom RAL Finishes




Traffic White
RAL 9016



Papyrus White
RAL 9018



Graphic Grey
RAL 7024



Light Grey
RAL 7035



Jet Black
RAL 9005



Graphic Black
RAL 9011



Azure Blue
RAL 5009



Gentian Blue
RAL 5010



Sky Blue
RAL 5015



Pastel Orange
RAL 2003



Pure Orange
RAL 2004



Daffodil Yellow
RAL 1007



Lemon Yellow
RAL 1012



Zinc Yellow
RAL 1018




Coral Red
RAL 3016



Rose
RAL 3017



Traffic Red
RAL 3020



Salmon Pink
RAL 3022



Olive Green
RAL 6003



Moss Green
RA 6005



Grass Green
RAL 6010



Claret Violet
RAL 4004



Traffic Purple
RAL 4006



Pearl Blackberry
RAL 4012



Beige
RAL 1001



Nut Brown
RAL 8011



Sepia Brown
RAL 8014



Mahogany Brown
RAL 8016

Custom Finishes - Please contact factory
Additional Finishes Available - Please contact factory