

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_


# Thinline Rectangle

Suspended Direct | Direct/Indirect

Architectural luminaire. Rectangular shaped design. Pendant mounting. Direct and direct-indirect distribution options. 3 standards sizes. Additional sizes available. 2.25" wide. Multiple finishes available. Dry and damp rated.

cULus Listed

Designed and manufactured in North America  
5 Year Warranty

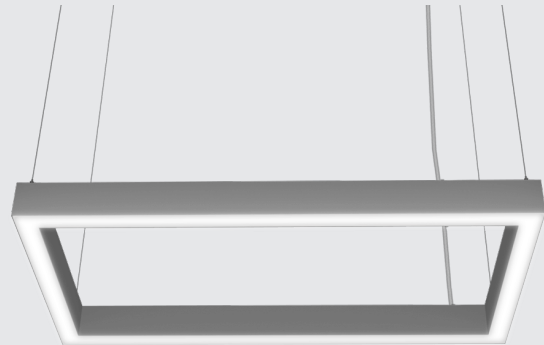

## Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



## Ordering Options

Sample Configuration: DTL RECT - 6FT x 3FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

Model	Size	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL RECT	4FT x 2FT	D 250	I 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	6FT x 3FT	D 500	I 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	8FT x 4FT	D 750	I 750		35K 3500K		
	- Custom Sizes Available - Please Consult Factory	D 1000	I 1000		4K 4000K		
		D _____	I _____		5K 5000K		
		(custom up to 1200)	(custom up to 1200)				

DTL RECT

Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted BATWING Batwing <i>Indirect Lens: Minimum size 4 x 2FT</i>	WH White BLK Black GRY Grey CU Custom <i>- For custom finishes please specify RAL number - See Finish Options</i>	AC Aircraft Cable 10' (Std)	DIMOFF 0-10V DIMOFF  <i>Optional</i> DALI Digital Addressable Lighting Interface LUTRON Lutron Ecosystem SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None  <i>Optional</i> DMX Digital Multiplex SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral

AC

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device	5 WIRE 5 Wire (Std) <i>Optional</i> N 5 Leads 6 WIRE 6 Wire - Cable (EM - Emergency Battery Option)	CL Clear <i>Optional</i> B Black W White	Length(Ft)  - 6Ft (Std)	WH White BLK Black CU Custom <i>- For custom finishes please specify RAL number - See Finish Options</i>

**LED**

L90>70,000

Samsung 301 3-Step MacAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%

**Lens Options - Direct Distribution**




Standard  
Frosted Flat




Frosted  
0.25" Regressed

**Lens Options - Indirect Distribution**




Standard  
Frosted



Batwing

**Dimensions**

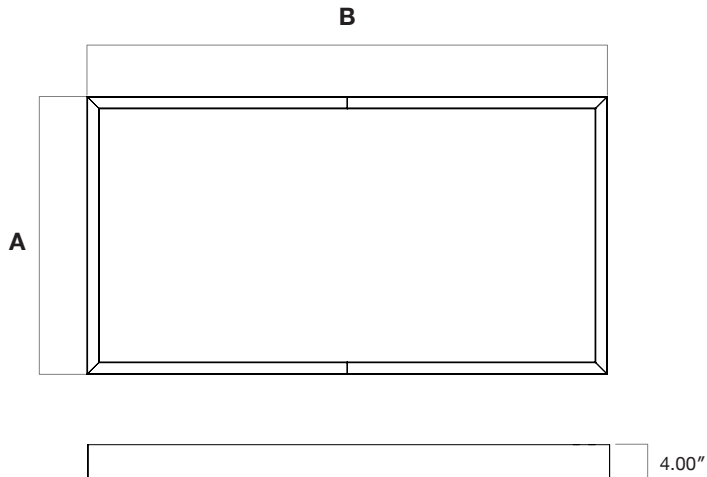

Model	A	B
4FT x 2FT	26.8"	50.8"
6FT x 3FT	38.8"	74.8"
8FT x 4FT	50.8"	98.8"


**Note:**

4FT x 2FT - 1 Piece

6FT x 3FT - 1 Piece

8FT x 4FT - 2 Pieces

Mounting

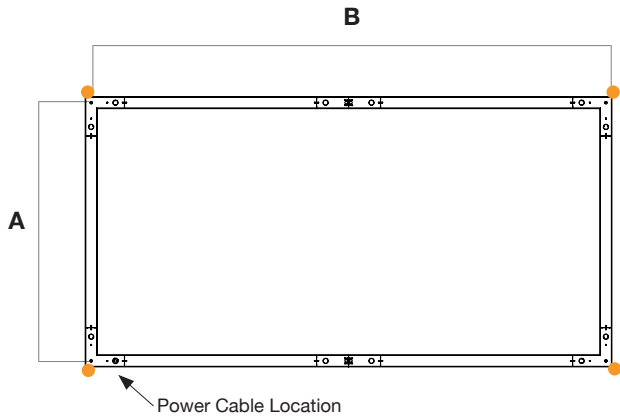

● Aircraft Cable Mounting Locations (4)

Model	A	B
4FT x 2FT	24.5"	48.5"
6FT x 3FT	36.5"	72.5"
8FT x 4FT	48.5"	96.5"

## Finish Options

### Standard RAL Finishes




**Signal White**  
RAL 9003

**Telegrey 2**  
RAL 7046

**Signal Black**  
RAL 9004

### Sample Custom RAL Finishes

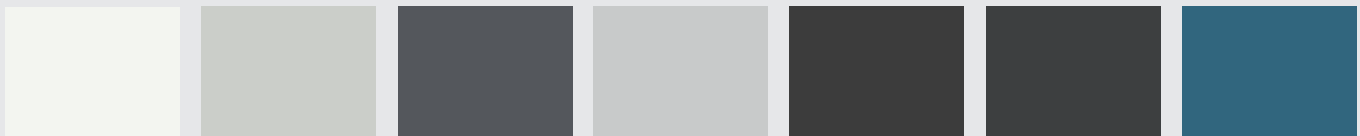

**Traffic White**  
RAL 9016

**Papyrus White**  
RAL 9018


**Graphic Grey**  
RAL 7024

**Light Grey**  
RAL 7035

**Jet Black**  
RAL 9005

**Graphic Black**  
RAL 9011

**Azure Blue**  
RAL 5009

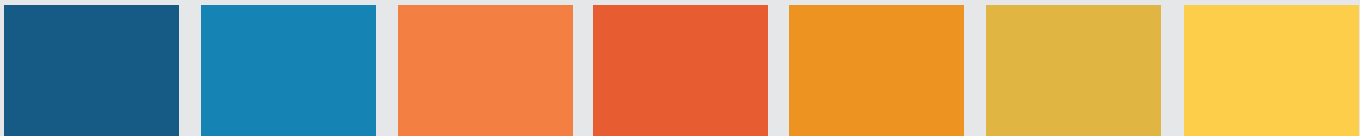

**Gentian Blue**  
RAL 5010

**Sky Blue**  
RAL 5015


**Pastel Orange**  
RAL 2003

**Pure Orange**  
RAL 2004

**Daffodil Yellow**  
RAL 1007

**Lemon Yellow**  
RAL 1012

**Zinc Yellow**  
RAL 1018

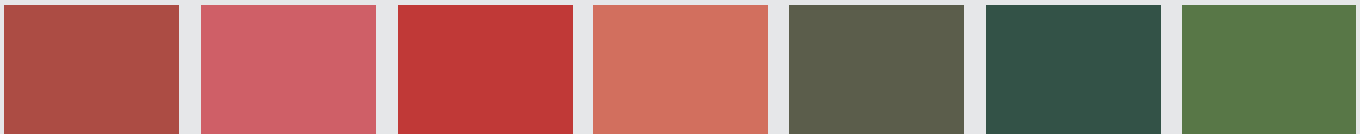

**Coral Red**  
RAL 3016

**Rose**  
RAL 3017

**Traffic Red**  
RAL 3020

**Salmon Pink**  
RAL 3022

**Olive Green**  
RAL 6003

**Moss Green**  
RA 6005

**Grass Green**  
RAL 6010



**Claret Violet**  
RAL 4004

**Traffic Purple**  
RAL 4006

**Pearl Blackberry**  
RAL 4012

**Beige**  
RAL 1001

**Nut Brown**  
RAL 8011

**Sepia Brown**  
RAL 8014

**Mahogany Brown**  
RAL 8016

Custom Finishes - Please contact factory  
Additional Finishes Available - Please contact factory