

Fixture: _____ QTY: _____ Project : _____

Thinline Spot Multiple


Suspended Direct

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Pendant mounting. Cast end caps with light block. Multiple spotlight positions. Spotlight driver 0-10V dimming. Universal 120/277 voltage. 4.5" wide. 2' - 8' Lengths. Dry and damp rated.

cULus Listed

Designed and manufactured in North America

5 Year Warranty

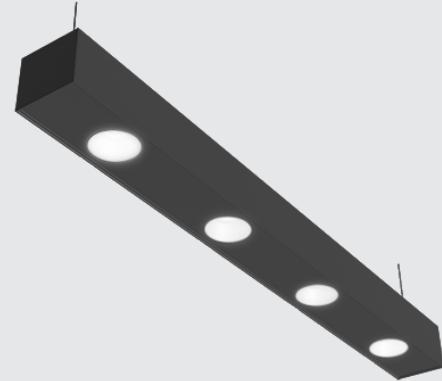

Performance

4000K - 166 Lm/W | 3500K - 165 Lm/W | 3000K - 161 Lm/W



Ordering Options

Sample Configuration: DTL MLT - 10W - 8 - 80 - 4K - M - WH - AC - DIMOFF - N - N - 5 WIRE - CL - 10 - WH

Model	Watts	Lengths - #Spots	CRI	Color Temp	Spot Reflector	Finish	Mounting
DTL MLT	10W	2' - 2 Spots	80	27K 2700K	N Narrow - 20°	WH White	AC Aircraft Cable 10' (Std)
		3' - 3 Spots	90	3K 3000K	M Medium - 30°	BLK Black	
	15W	4' - 4 Spots		35K 3500K	W Wide - 50°	GRY Grey	<i>Optional</i>
		5' - 5 Spots		4K 4000K		CU Custom	TR Threaded Rod
		6' - 6 Spots		5K 5000K			TB9/16 T-Bar 9/16 Clip
		7' - 7 Spots					TB15/16 T-Bar 15/16 Clip
		8' - 8 Spots					

- For custom finishes please specify RAL number
- See Finish Options
- For threaded rod, please specify length

DTL MLT

Driver	Controls	Accessories	Wiring	Wire Color
DIMOFF 0-10V DIMOFF	N None	N None	5 WIRE 5 Wire (Std)	CL Clear
<i>Optional</i>	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>
TRI Triac Dimming	SNS Philips SNS 300 w/BLD & Daylight	10kV 10kV Surge Protection	N 5 Leads	B Black
ELV Electronic Low Voltage	CLM Encelium CLM	+GTD Generator Transfer Device		W White
	LG LG Dongle			
	BT Bluetooth Mesh			
	EN Enlighted Integral			


Wire Length	Canopy Finish
Length(Ft)	WH White
	BLK Black
	CU Custom
	- For custom finishes please specify RAL number
	- See Finish Options

Output Performance - Spotlight


Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 10	11.4	2700K	80	151	1,732
	11.4	3000K	80	161	1,840
	11.4	3500K	80	165	1,883
	11.4	4000K	80	166	1,894
	11.4	5000K	80	167	1,916

Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 15	16.3	2700K	80	151	2,474
	16.3	3000K	80	161	2,628
	16.3	3500K	80	165	2,690
	16.3	4000K	80	166	2,706
	16.3	5000K	80	167	2,737


Spot Beam

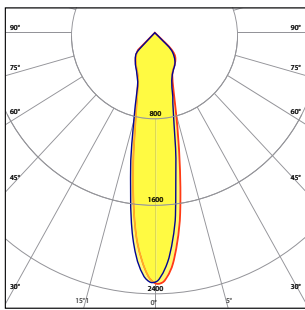

20° Spot Beam

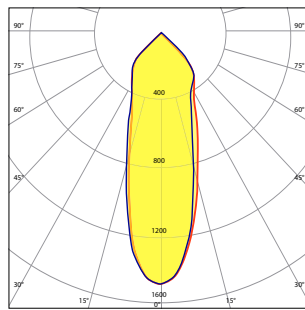


30° Medium Beam

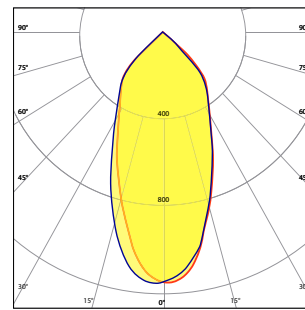


50° Wide Beam


Dimensions

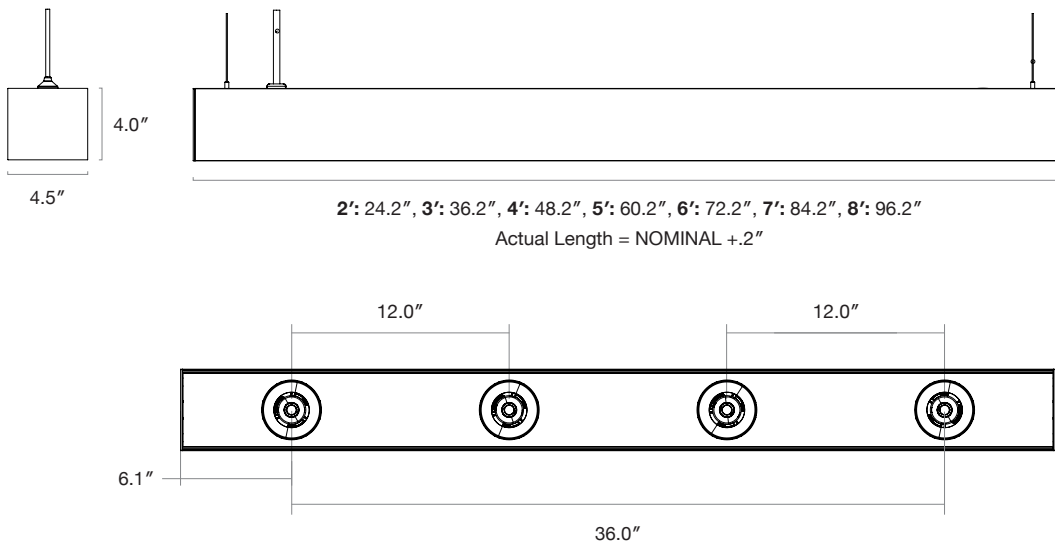

Mounting Options

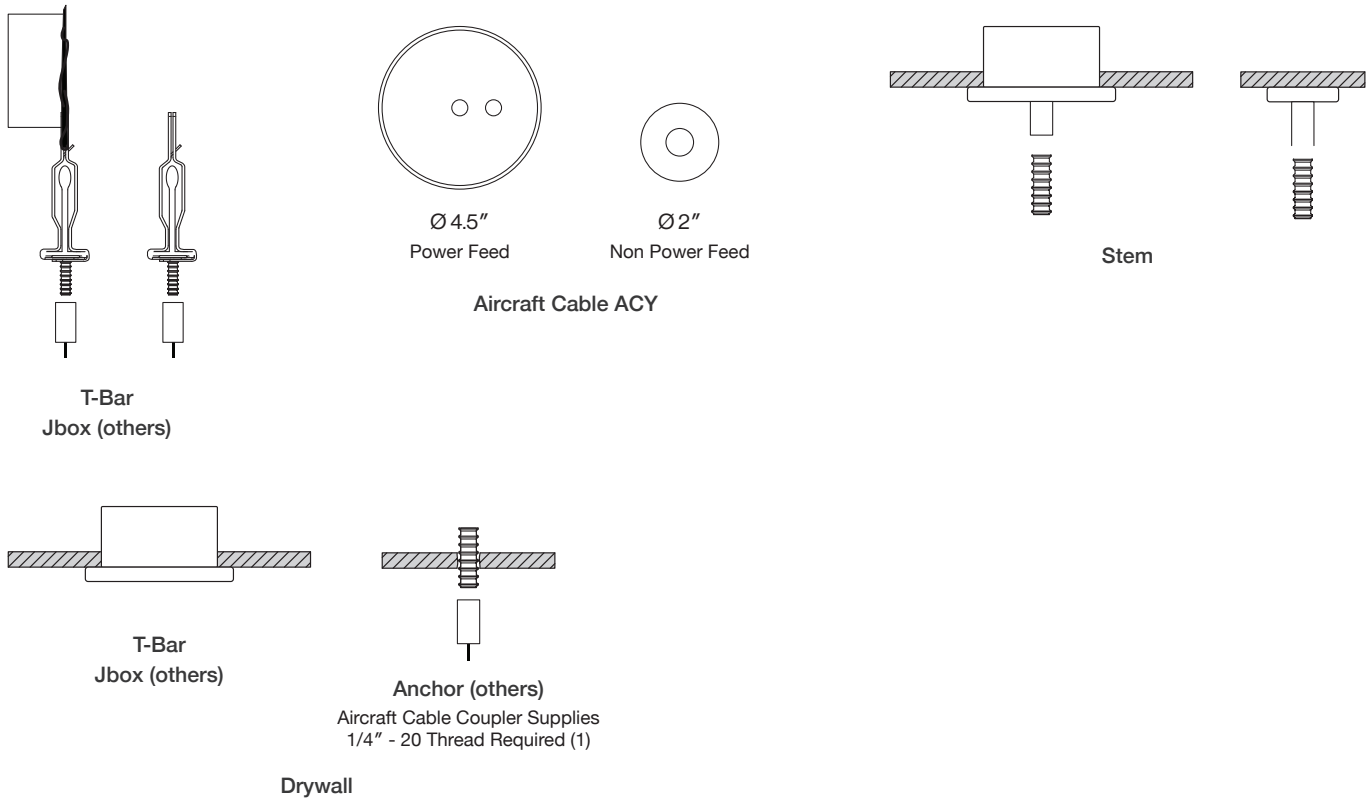

Mounting Locations

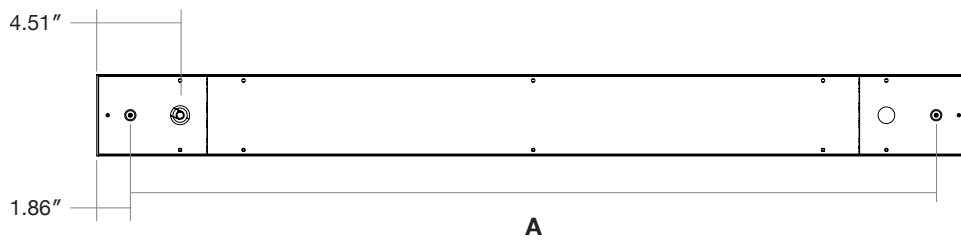

Model	Lengths - A
DTL 2	20.5"
DTL 3	32.5"
DTL 4	44.5"
DTL 5	56.5"
DTL 6	68.5"
DTL 7	80.5"
DTL 8	92.5"

Finish Options

Standard RAL Finishes




Signal White
RAL 9003

Telegrey 2
RAL 7046

Signal Black
RAL 9004

Sample Custom RAL Finishes

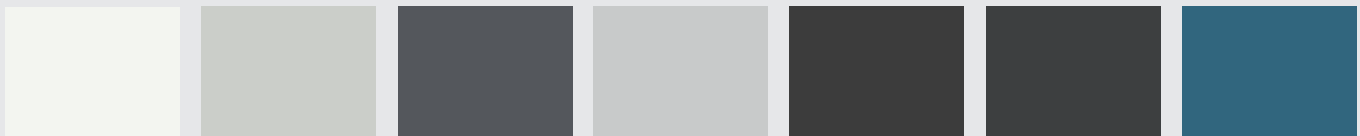

Traffic White
RAL 9016

Papyrus White
RAL 9018


Graphic Grey
RAL 7024

Light Grey
RAL 7035

Jet Black
RAL 9005

Graphic Black
RAL 9011

Azure Blue
RAL 5009

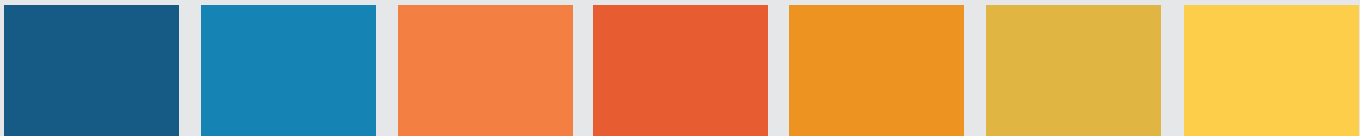

Gentian Blue
RAL 5010

Sky Blue
RAL 5015


Pastel Orange
RAL 2003

Pure Orange
RAL 2004

Daffodil Yellow
RAL 1007

Lemon Yellow
RAL 1012

Zinc Yellow
RAL 1018

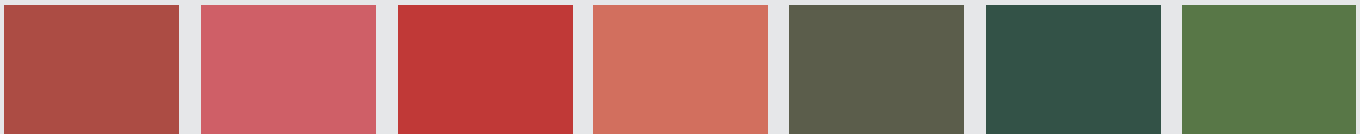

Coral Red
RAL 3016

Rose
RAL 3017

Traffic Red
RAL 3020

Salmon Pink
RAL 3022

Olive Green
RAL 6003

Moss Green
RA 6005

Grass Green
RAL 6010



Claret Violet
RAL 4004

Traffic Purple
RAL 4006

Pearl Blackberry
RAL 4012

Beige
RAL 1001

Nut Brown
RAL 8011

Sepia Brown
RAL 8014

Mahogany Brown
RAL 8016

Custom Finishes - Please contact factory
Additional Finishes Available - Please contact factory