

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_


# Thinline L 60

Suspended Direct | Direct/Indirect

Architectural 60° L shaped luminaire. Pendant mounting. Direct and direct-indirect distribution options. Available in 3 sizes. 2.25" wide. Multiple finishes available. Dry and damp rated.

cULus Listed

Designed and manufactured in North America  
5 Year Warranty

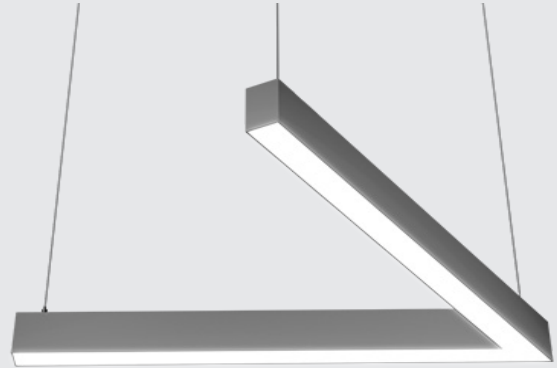

## Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



## Ordering Options

Sample Configuration: DTL L 60 - 2FT x 2FT - D 500 - I 500 - 90 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 2 - N - 5 WIRE - CL - 6 - WH

Model	Size	Direct Lm/ft	Indirect Lm/ft	GRI	Color Temp	Voltage	Direct Lens
DTL L 60	2FT x 2FT	D 250	I 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	3FT x 3FT	D 500	I 500	90	3K 3000K	H 347V	FRREG Frosted Regressed
	4FT x 4FT	D 750	I 750		35K 3500K		
	-Custom Sizes	D 1000	I 1000		4K 4000K		
	Available - Please Consult Factory	D _____ (custom up to 1200)	I _____ (custom up to 1200)		5K 5000K		

DTL L 60

Indirect Lens	Finish	Mounting	Driver	Controls
FR Frosted BATWING Batwing <i>Indirect Lens: Minimum size 2FT x 2FT</i>	WH White BLK Black GRY Grey CU Custom <i>- For custom finishes please specify RAL number - See Finish Options</i>	AC Aircraft Cable 10' (Std)	DIMOFF 0-10V DIMOFF <i>Optional</i> DALI Digital Addressable Lighting Interface LUTRON Lutron Ecosystem SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None <i>Optional</i> DMX Digital Multiplex SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral

AC





Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device	5 WIRE 5 Wire (Std) <i>Optional</i> N 5 Leads 6 WIRE 6 Wire - Cable (EM -Emergency Battery Option)	CL Clear <i>Optional</i> B Black W White	Length(Ft) - 6Ft (Std)	WH White BLK Black CU Custom <i>- For custom finishes please specify RAL number - See Finish Options</i>

**LED**

L90>70,000  
 Samsung 301 3-Step MacAdam Binning  
 4000K 120 Lm/W  
 3500K 98%  
 3000K 96%  
 90 CRI 85%

**Lens Options - Direct Distribution**

**Lens Options - Indirect Distribution**




Standard  
Frosted Flat

Frosted  
0.25" Regressed

Standard  
Frosted


Batwing

**Dimensions**

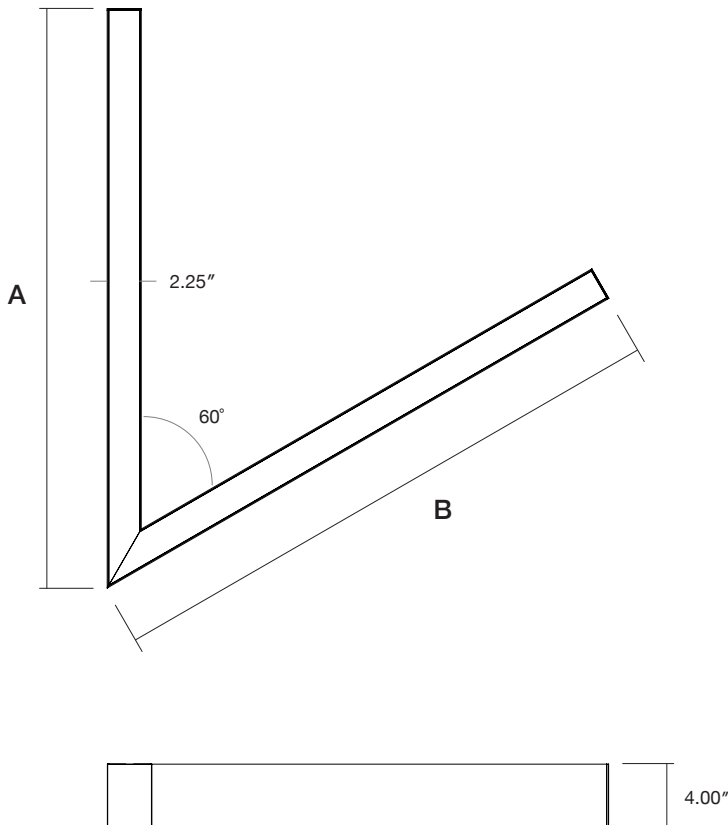

Model	A	B
2FT x 2FT	22.4"	26.3"
3FT x 3FT	34.4"	38.3"
4FT x 4FT	46.4"	50.3"

Mounting

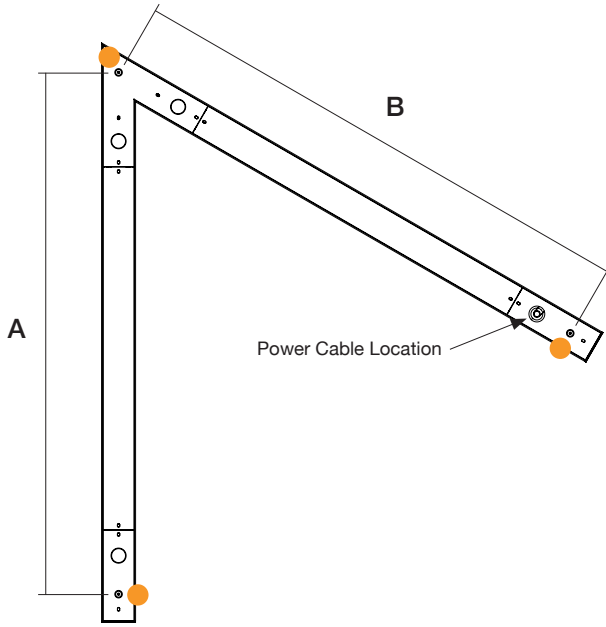


Model	A	B
2FT x 2FT	24.4"	23"
3FT x 3FT	34.5"	32"
4FT x 4FT	46.5"	44"

● Mounting Locations

## Finish Options

### Standard RAL Finishes



**Signal White**  
RAL 9003




**Telegrey 2**  
RAL 7046




**Signal Black**  
RAL 9004


### Sample Custom RAL Finishes




**Traffic White**  
RAL 9016



**Papyrus White**  
RAL 9018



**Graphic Grey**  
RAL 7024



**Light Grey**  
RAL 7035



**Jet Black**  
RAL 9005



**Graphic Black**  
RAL 9011




**Azure Blue**  
RAL 5009




**Gentian Blue**  
RAL 5010



**Sky Blue**  
RAL 5015



**Pastel Orange**  
RAL 2003



**Pure Orange**  
RAL 2004



**Daffodil Yellow**  
RAL 1007



**Lemon Yellow**  
RAL 1012



**Zinc Yellow**  
RAL 1018



**Coral Red**  
RAL 3016



**Rose**  
RAL 3017



**Traffic Red**  
RAL 3020



**Salmon Pink**  
RAL 3022



**Olive Green**  
RAL 6003



**Moss Green**  
RA 6005



**Grass Green**  
RAL 6010



**Claret Violet**  
RAL 4004



**Traffic Purple**  
RAL 4006




**Pearl Blackberry**  
RAL 4012



**Beige**  
RAL 1001



**Nut Brown**  
RAL 8011



**Sepia Brown**  
RAL 8014



**Mahogany Brown**  
RAL 8016

Custom Finishes - Please contact factory

Additional Finishes Available - Please contact factory