

Fixture: _____ QTY: _____ Project : _____

Thinline Arch Square

Suspended Direct | Direct/Indirect

Architectural luminaire. Contemporary design. Aluminum housing. Square profile. Pendant mounting. Direct and Direct-Indirect distribution options. 4' and 6' lengths. Frosted lens. Multiple finishes. Dry and damp rated.

cULus Listed

Designed and manufactured in North America
5 Year Warranty



Ordering Options

Sample Configuration: DTL ARCH SQ - 4 - 2.5 - 2.5 - 90 - 4K - 4K - U - FR - GRY - AC - DIMOFF - N - 1 - N - 5WIRE - CL - 8 - WH

Model	Length	Direct Watts/ft	Indirect Watts/ft	CRI	Color Temp	Voltage	Lens (Direct-Indirect)
DTL ARCH SQ	4	2.5	2.5	80	3K 3000K	U 120/277V	FR Frosted
	6	3.5	3.5	90	35K 3500K	H 347V	
		5	5		4K 4000K		
		7.5	7.5		5K 5000K		
		10	10				

DTL ARCH SQ FR

Finish	Mounting	Driver	Controls
WH White BLK Black GRY Grey CU Custom - For custom finishes please specify RAL number - See Finish Options	AC Aircraft Cable 10' (Std)	DIMOFF 0-10 DIMOFF <i>Optional</i> DALI Digital Addressable Lighting Interface LUTRON SR Lutron Ecosystem Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None <i>Optional - External to the fixture due to the nature of the fixture</i> DMX Digital Multiplex SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integrall

AC

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device Note: - For Emergency Battery (EM), minimum length is 4' (direct distribution), 6' (indirect distribution)	5 WIRE 5 Wire (Std) <i>Optional</i> N 5 Leads 6 WIRE 6 Wire - Cable (EM - Emergency Battery Option)	CL Clear <i>Optional</i> B Black W White	Length(Ft) - 6Ft (Std)	WH White BLK Black CU Custom - For custom finishes please specify RAL number - See Finish Options


Specifications

Efficacy:	75 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-20°C to +40°C -4°F to +104°F
Controls:	0-10V Dimming
Mounting:	Aircraft Cable

Output Performance


Distribution	Watts/Ft	Delivered Lumens
Direct/Indirect	2.5	187.5
	3.5	262.5
	5	375
	7.5	562.5
	10	750

Lens Options - Direct Distribution




Standard
Frosted

Lens Options - Indirect Distribution




Standard
Frosted

Dimensions



4': 48", 6': 72"



Finish Options

Standard RAL Finishes




Signal White
RAL 9003

Telegrey 2
RAL 7046

Signal Black
RAL 9004

Sample Custom RAL Finishes

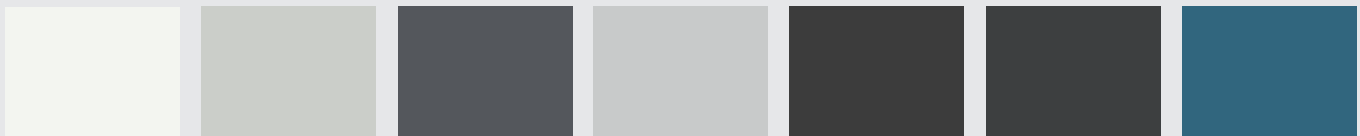

Traffic White
RAL 9016

Papyrus White
RAL 9018

Graphic Grey
RAL 7024

Light Grey
RAL 7035

Jet Black
RAL 9005

Graphic Black
RAL 9011

Azure Blue
RAL 5009



Gentian Blue
RAL 5010

Sky Blue
RAL 5015

Pastel Orange
RAL 2003

Pure Orange
RAL 2004

Daffodil Yellow
RAL 1007

Lemon Yellow
RAL 1012

Zinc Yellow
RAL 1018



Coral Red
RAL 3016

Rose
RAL 3017

Traffic Red
RAL 3020

Salmon Pink
RAL 3022

Olive Green
RAL 6003

Moss Green
RA 6005

Grass Green
RAL 6010



Claret Violet
RAL 4004

Traffic Purple
RAL 4006

Pearl Blackberry
RAL 4012

Beige
RAL 1001

Nut Brown
RAL 8011

Sepia Brown
RAL 8014

Mahogany Brown
RAL 8016

Custom Finishes - Please contact factory
Additional Finishes Available - Please contact factory