

Fixture: _____ QTY: _____ Project : _____

Thinline Surface

Surface Direct

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Cast end caps with light block. Surface mounting. 2.25", 3.18", and 4.5" widths. Continuous runs available. Multiple finish options. Acoustic option with designer felt. Dry and Damp rated.

DLC Listed | cULus Listed


Designed and manufactured in North America
5 Year Warranty

Performance

4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W



Model: Thinline 3.18

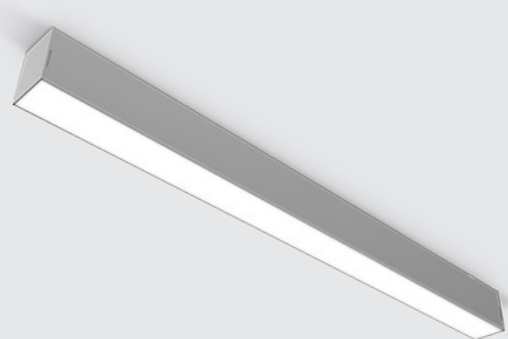

Ordering Options

Sample Configuration: DTL SU - 3.18 - 8 - D 500 - 90 - 4K - U - FR - WH - S - DIMOFF - N - N - N

Model	Width	Continuous Run	Direct Lm/ft	CRI	Color Temp	Voltage	Direct Lens
DTL SU	2.25	CR _____	D 250	80	27K 2700K	U 120/277V	FR Frosted Flat
	3.18	Min 2Ft (1Ft increments, Unibody up to 8Ft)	D 500	90	3K 3000K	H 347V	<i>Optional</i>
	4.5	<i>Optional</i> - Available in 6-inch increments	D 1000 D _____ (custom up to 1200)		35K 3500K 4K 4000K 5K 5000K		FFREG Frosted Regressed ASY Asymmetric Clear 0.5 FRDRP 0.5" Frosted Drop Lens 1.5 FRDRP 1.5" Frosted Drop Lens LVR Louver Lens

Note: 1.5 Frosted Drop Lens for 2.25 and 3.18 model widths only

DTL SU


Finish	Felt Color	Mounting	Driver	Controls
WH White BLK Black GRY Grey CU Custom - For custom finishes please specify RAL number - See Finish Options	N None Color Code # _____ - Please see pages 4 and 5 for color options	S Solid <i>Optional</i> STB 9/16 T-Bar 9/16 STB 15/16 T-Bar 15/16	DIMOFF 0-10V DIMOFF <i>Optional</i> DALI Digital Addressable Lighting Interface LUTRON SR Lutron Ecosystem Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None <i>Optional</i> DMX Digital Multiplex SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral

Accessories	Wiring
N None <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device Note: - For Emergency Battery (EM), minimum length is 4'	N 5 Leads <i>Optional</i> 5 WIRE 5 Wire 6 WIRE 6 Wire - Cable (EM - Emergency Battery Option)


LED

L90>70,000
 Samsung 301 3-Step MacAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%


Lens Options - Direct Distribution




Standard
Frosted Flat




Frosted
0.25" Regressed



Asymmetric
Clear





0.5" Drop Lens



1.5" Drop Lens

Note: For 2.25 and 3.18 model widths only


Dimensions

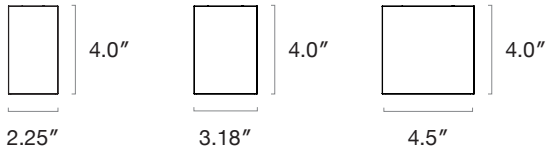

2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"


Actual Length = NOMINAL +.2"

Mounting




Solid Ceiling

1/4"-20 Thread Required (1)

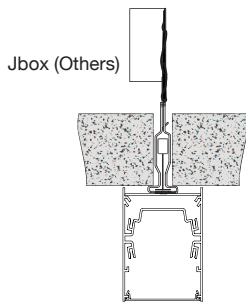

T-Bar 9/16"


Aircraft Cable (ACY)

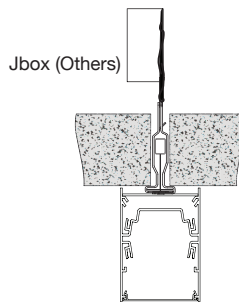

T-Bar 15/16"

Aircraft Cable (ACY)

Surface Mount Power Access

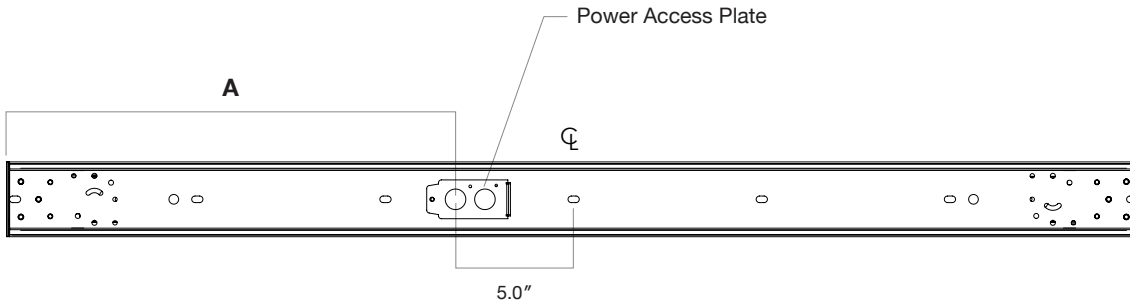


Distance from the
Center Line (CL)

Model	Distance From End
DTL 2Ft	7.1"
DTL 3Ft	13.1"
DTL 4Ft	19.1"
DTL 5Ft	25.1"
DTL 6Ft	31.1"
DTL 7Ft	37.1"
DTL 8Ft	43.1"

Finish Options

Standard RAL Finishes



Signal White
RAL 9003




Telegrey 2
RAL 7046




Signal Black
RAL 9004


Sample Custom RAL Finishes




Traffic White
RAL 9016



Papyrus White
RAL 9018



Graphic Grey
RAL 7024



Light Grey
RAL 7035



Jet Black
RAL 9005



Graphic Black
RAL 9011



Azure Blue
RAL 5009



Gentian Blue
RAL 5010



Sky Blue
RAL 5015



Pastel Orange
RAL 2003




Pure Orange
RAL 2004




Daffodil Yellow
RAL 1007




Lemon Yellow
RAL 1012



Zinc Yellow
RAL 1018




Coral Red
RAL 3016



Rose
RAL 3017



Traffic Red
RAL 3020



Salmon Pink
RAL 3022



Olive Green
RAL 6003




Moss Green
RA 6005




Grass Green
RAL 6010




Claret Violet
RAL 4004




Traffic Purple
RAL 4006




Pearl Blackberry
RAL 4012




Beige
RAL 1001



Nut Brown
RAL 8011



Sepia Brown
RAL 8014



Mahogany Brown
RAL 8016

Custom Finishes - Please contact factory

Additional Finishes Available - Please contact factory

Acoustic Lighting

Experience comfort in sound and light with our acoustic lighting. Acoustic lighting combines sound-absorbing felt to help reduce sound waves, minimizing echoes and reverberations.

Specifications

0.37" Thick
1500 gsm (44 opsy)

Color Options

