

Fixture: _____ QTY: _____ Project : _____


Zip Eco

Suspended | Surface

LED linear strip light. 2', 4, and 8' length options. High impact acrylic lens. Pendant and surface mounting options. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Dry and damp rated.

DLC Listed
cULus Listed

Designed and manufactured in North America
5 Year Warranty

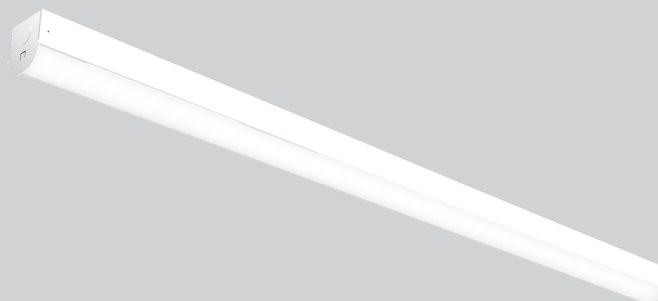

Ordering Options

Sample Configuration: ZIP - 8 - 60 - 80 - 4K - U - FR - WH - V - BFC - N - ECO

Model	Length	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting
ZIP	2	20, 30	80	3K 3000K	U 120/277V	FR Frosted	WH White	V V Hooks
	4	20, 30, 40, 60	90	35K 3500K	H 347/480V			SU Surface
	8	40, 60, 80, 100, 120		4K 4000K				Optional
				5K 5000K				CR Continuous Run

ZIP FR WH

Wiring

BFC Black Flexible Cord
WFC White Flexible Cord
IN Internal

Accessories

N None

Optional

OCC Occupancy Sensor (on/off)
10kV 10kV Surge Protection
WG Wire Guard
RFL Reflector
EM Emergency Driver Integral Programmable
MICRO Microwave Sensor -External (with BLD and Daylight Harvesting options)

Type

ECO

ECO

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.


Features & Specifications

Efficacy:	Zip 2: 142 Lm/W Zip 4: Up to 155 Lm/W Zip 8: Up to 158 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-35°C to +45°C -31°F to +113°F
Controls:	0-10V Dimming
Mounting:	V Hook, Surface Mount
Accessories:	Occupancy Sensor (on/off), Emergency Battery, 10kV Surge Protection, Wire Guard, Reflector, Microwave Sensor (external)


Output Performance at 4K

Model	Watts	Lm/W	Delivered Lumens	Model	Watts	Lm/W	Delivered Lumens
Zip 2 20	20.63	141.88	2,927	Zip 8 40	39.26	157.62	6,188
Zip 2 30	30.95	141.87	4,391	Zip 8 60	59.24	155.09	9,172
				Zip 8 80	79.26	154.67	12,259
				Zip 8 100	99.38	154.42	15,346
				Zip 8 120	119.26	154.42	18,416
Model	Watts	Lm/W	Delivered Lumens				
Zip 4 20	18.90	150.26	2,840				
Zip 4 30	29.08	153.30	4,458				
Zip 4 40	39.26	154.74	6,075				
Zip 4 60	59.14	152.96	9,046				


Dimensions

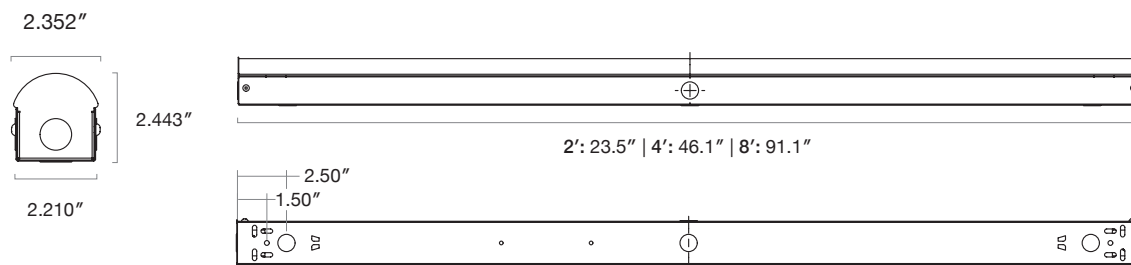

Wire Guard

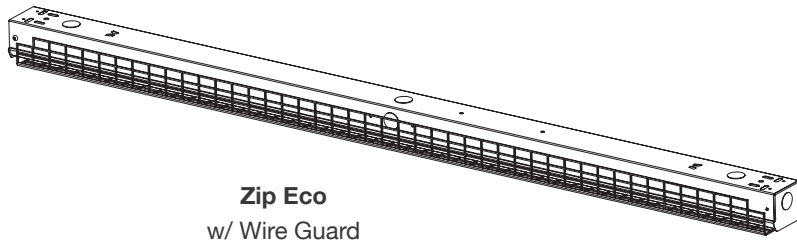


Reflector Option

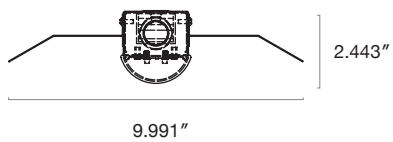

Note: Zip 2 - Please contact factory

Zip 4

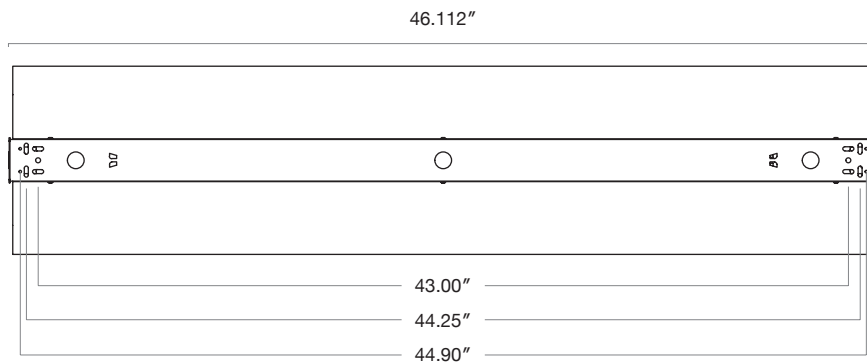

Zip 8

