

Fixture: _____ QTY: _____ Project : _____

Thinline Arch

Suspended Direct | Direct/Indirect

Architectural luminaire. Contemporary design. Arch style profile. Aluminum housing. Pendant mounting. Direct and direct-indirect distribution options. 4' and 6' lengths. Frosted lens. Multiple finish options. Dry and damp rated.

cULus Listed

Designed and manufactured in North America
5 Year Warranty



Ordering Options

Sample Configuration: DTL ARCH - 4 - 2.5 - 2.5 - 90 - 4K - U - FR - WH - AC - DIMOFF - N - 1 - N - 5WIRE - CL - 8 - WH

Model	Length	Direct Watts/ft	Indirect Watts/ft	CRI	Color Temp	Voltage	Lens (Direct-Indirect)
DTL ARCH	4	5	2.5	80	3K 3000K	U 120/277V	FR Frosted
	6	7	3.5	90	35K 3500K	H 347V	
		10	5		4K 4000K		
		15	7.5		5K 5000K		
		20	10				
DTL ARCH							FR

Finish	Mounting	Driver	Controls
WH White BLK Black GRY Grey CU Custom - For custom finishes please specify RAL number - See Finish Options	AC Aircraft Cable 10' (Std)	DIMOFF 0-10 DIMOFF Optional DALI Digital Addressable Lighting Interface Lutron Ecosystem LUTRON SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None Optional - External to the fixture due to the nature of the fixture DMX Digital Multiplex SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral
	AC		

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None Optional 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device Note: - For Emergency Battery (EM), minimum length is 4' (direct distribution), 6' (indirect distribution)	5 WIRE 5 Wire (std) Optional N 5 Leads 6 WIRE 6 Wire - Cable (EM - Emergency Battery Option)	CL Clear Optional B Black W White	Length(Ft) - 6Ft (Std)	WH White BLK Black CU Custom - For custom finishes please specify RAL number - See Finish Options


Specifications

Efficacy:	75 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-20°C to +40°C -4°F to +104°F
Controls:	0-10V Dimming
Mounting:	Aircraft Cable

Output Performance


Distribution	Watts/FT	Delivered Lumens
Direct	5	375
	7	525
	10	750
	15	1125
	20	1500
Indirect	2.5	187.5
	3.5	262.5
	5	375
	7.5	562.5
	10	750

Lens Options - Direct Distribution





Standard
Frosted

Lens Options - Indirect Distribution



Standard
Frosted

Dimensions

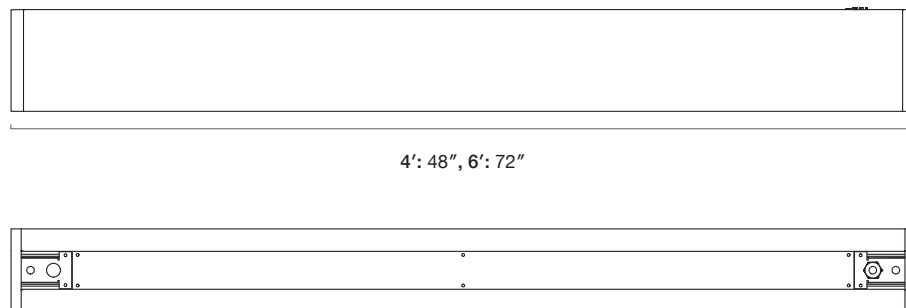

Finish Options

Standard RAL Finishes




Signal White
RAL 9003

Telegrey 2
RAL 7046

Signal Black
RAL 9004

Sample Custom RAL Finishes

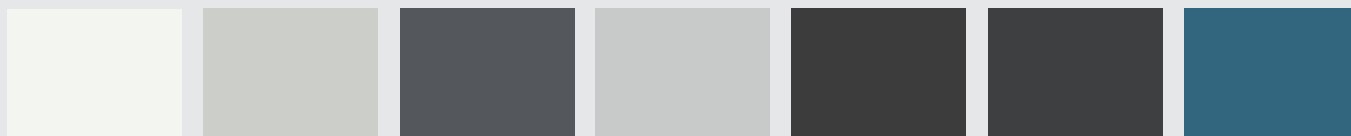

Traffic White
RAL 9016

Papyrus White
RAL 9018

Graphic Grey
RAL 7024

Light Grey
RAL 7035

Jet Black
RAL 9005

Graphic Black
RAL 9011

Azure Blue
RAL 5009



Gentian Blue
RAL 5010

Sky Blue
RAL 5015


Pastel Orange
RAL 2003

Pure Orange
RAL 2004

Daffodil Yellow
RAL 1007

Lemon Yellow
RAL 1012

Zinc Yellow
RAL 1018

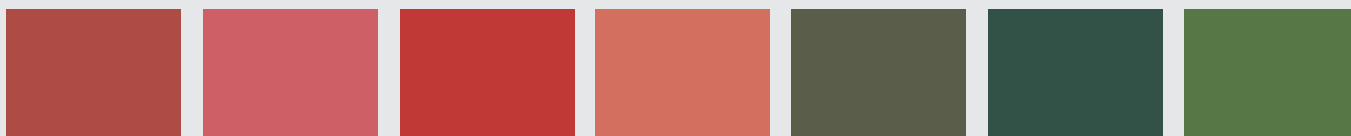

Coral Red
RAL 3016

Rose
RAL 3017

Traffic Red
RAL 3020

Salmon Pink
RAL 3022

Olive Green
RAL 6003

Moss Green
RAL 6005

Grass Green
RAL 6010



Claret Violet
RAL 4004

Traffic Purple
RAL 4006

Pearl Blackberry
RAL 4012

Beige
RAL 1001

Nut Brown
RAL 8011

Sepia Brown
RAL 8014

Mahogany Brown
RAL 8016

Custom Finishes - Please contact factory
Additional Finishes Available - Please contact factory