

Fixture: _____ QTY: _____ Project : _____

Thinline Spots

Suspended Direct

Architectural spotlights. Aluminum extruded body. Pendant mounting. Cast end caps with light block. 4 size options. Spotlight driver 0-10V dimming. Universal 120/277 voltage. Dry and damp rated.

cULus Listed

Designed and manufactured in North America
5 Year Warranty



Ordering Options

Sample Configuration: DTL SPT - 10W - 3 - 80 - 4K - N - BLK - AC - DIMOFF - N - N - 5WIRE - CL - 10 - BLK

Model	Watts	Spots	CRI	Color Temp	Spot Reflector	Finish	Mounting
DTL SPT	10W	1 - Spots	80	27K 2700K	N Narrow - 20°	WH White	AC Aircraft Cable 10' (Std)
	15W	2 - Spots	90	3K 3000K	M Medium - 30°	BLK Black	<i>Optional</i>
		3 - Spots	35K 3500K	W Wide - 50°	GRY Grey	TR Threaded Rod	
		4 - Spots	4K 4000K	CU Custom	TB9/16 T-Bar 9/16 Clip		
				5K 5000K			TB15/16 T-Bar 15/16 Clip
						- For custom finishes please specify RAL number - See Finish Options	- For threaded rod, please specify length

DTL SPT							
---------	--	--	--	--	--	--	--

Driver	Controls	Accessories	Wiring
DIMOFF 0-10V DIMOFF	N None	N None	5 WIRE 5 Wire (Std)
<i>Optional</i>	<i>Optional</i>	<i>Optional</i>	<i>Optional</i>
TRI Triac Dimming	SNS Philips SNS 300 w/BLD & Daylight	10kV 10kV Surge Protection	N 5 Leads
ELV Electronic Low Voltage	CLM Encelium CLM	+GTD Generator Transfer Device	
	LG LG Dongle		
	BT Bluetooth Mesh		
	EN Enlighted Integral		

--	--	--	--

Wire Color	Wire Length	Canopy Finish
CL Clear	Length(Ft)	WH White
<i>Optional</i>		BLK Black
B Black		GRY Grey
W White		CU Custom
		- For custom finishes please specify RAL number - See Finish Options


--	--	--

Output Performance - Spotlight


Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 10	11.4	2700K	80	151	1,732
	11.4	3000K	80	161	1,840
	11.4	3500K	80	165	1,883
	11.4	4000K	80	166	1,894
	11.4	5000K	80	167	1,916

Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 15	16.3	2700K	80	151	2,474
	16.3	3000K	80	161	2,628
	16.3	3500K	80	165	2,690
	16.3	4000K	80	166	2,706
	16.3	5000K	80	167	2,737


Spot Beam

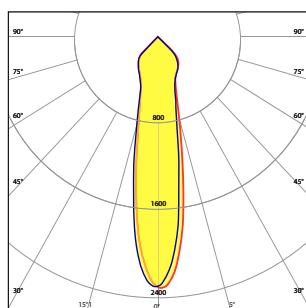

20° Spot Beam




30° Medium Beam




50° Wide Beam

Dimensions


Del Spot 1

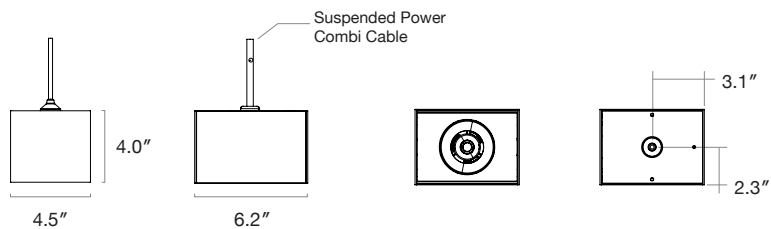


Del Spot 2

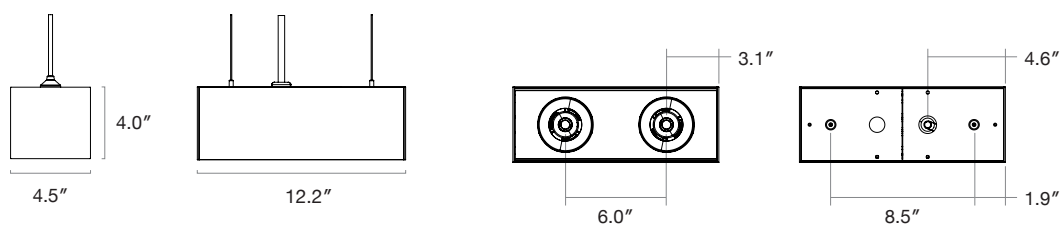


Del Spot 3

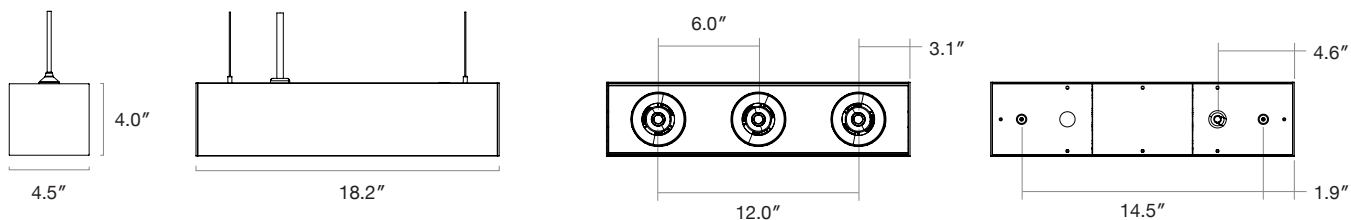


Del Spot 4

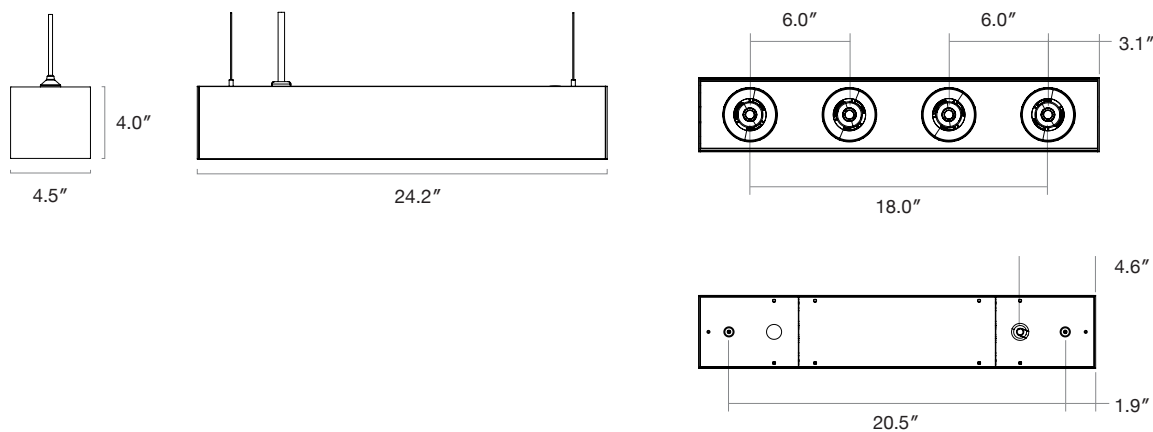

Mounting Options

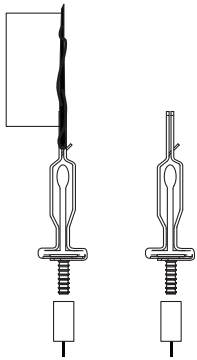

T-Bar
Jbox (others)




Ø 4.5"
Power Feed




Ø 2"
Non Power Feed


Aircraft Cable ACY

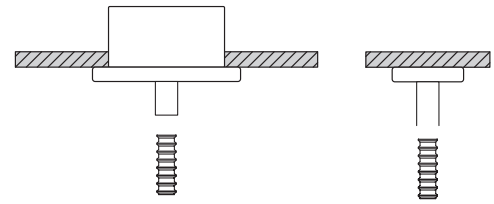

Stem



T-Bar
Jbox (others)



Anchor (others)
Aircraft Cable Coupler Supplies
1/4" - 20 Thread Required (1)

Drywall

Finish Options


Standard RAL Finishes



Signal White
RAL 9003




Telegrey 2
RAL 7046




Signal Black
RAL 9004


Sample Custom RAL Finishes




Traffic White
RAL 9016




Papyrus White
RAL 9018




Graphic Grey
RAL 7024



Light Grey
RAL 7035



Jet Black
RAL 9005



Graphic Black
RAL 9011



Azure Blue
RAL 5009



Gentian Blue
RAL 5010



Sky Blue
RAL 5015



Pastel Orange
RAL 2003



Pure Orange
RAL 2004



Daffodil Yellow
RAL 1007



Lemon Yellow
RAL 1012



Zinc Yellow
RAL 1018




Coral Red
RAL 3016



Rose
RAL 3017



Traffic Red
RAL 3020



Salmon Pink
RAL 3022



Olive Green
RAL 6003



Moss Green
RAL 6005



Grass Green
RAL 6010



Claret Violet
RAL 4004



Traffic Purple
RAL 4006



Pearl Blackberry
RAL 4012



Beige
RAL 1001



Nut Brown
RAL 8011



Sepia Brown
RAL 8014



Mahogany Brown
RAL 8016

Custom Finishes - Please contact factory

Additional Finishes Available - Please contact factory