

Fixture: _____ QTY: _____

Project: _____

Zip Cloud Acoustic

Suspended Direct-Indirect

Our Zip Cloud pendant acoustic light fixture combines the best of lighting and sound absorption technology.

Our innovative lighting solution not only illuminates your environment with brilliant LED light but also enhances the acoustics of the room, creating an environment that is both visually stunning and acoustically pleasing.

Designed and Manufactured in North America.



Specifications


Efficacy	120 Lm/W
Direct Watts	20W - 160W (see performance table)
Indirect Watts	20W - 60W (see performance table)
CRI	80, 90
Lumen Maintenance	200,000+ Life Hours L70
Color Temp	2700K, 3000K, 3500K, 4000K, 5000K
Voltage	120/277, 347V
Construction	Aluminum extrusion
Dimensions	Height: 4" Diameter: 18", 24", 36", 44"
Mounting	Aircraft Cable 10" Standard
Lens Direct	Frosted Flat
Driver	0-10 DIMOFF
Felt	Rigid Panels - 9.5mm 0.37" Thick 1500 GSM (44 opsy) 60% Recycled PET Fiber 35 Vibrant Colors

Certifications	cULus Dry and Damp Rated
Warranty	5-Year Warranty

Output Performance

Model	Direct Watts	Lm/W	Delivered Lumens	Indirect Watts	Lm/W	Delivered Lumens
Zip Cloud 18	20	120	2,400	20	120	2,400
	40		4,800	40		4,800
	60		7,200			
	70		8,400			
Zip Cloud 24	20	120	2,400	20	120	2,400
	40		4,800	40		4,800
	60		7,200			
	80		9,600			
Zip Cloud 36	40	120	4,800	20	120	2,400
	80		9,600	40		4,800
	120		14,400	60		7,200
	160		19,200			
Zip Cloud 44	80	120	9,600	20	120	2,400
	120		14,400	40		4,800
	160		19,200	60		7,200

Dimensions

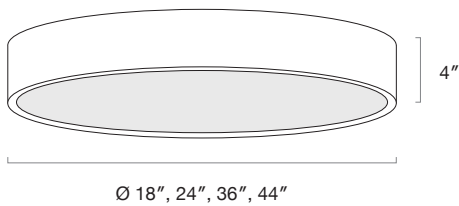


Eco Lux Designer Felt

Color Options



Ordering Options

Sample Configuration: Zip Cloud A - 18 - 60 - 40 - 80 - 4K - U - Direct/Indirect - Amber - AC - BFC 3 Wire - DIMOFF - WH

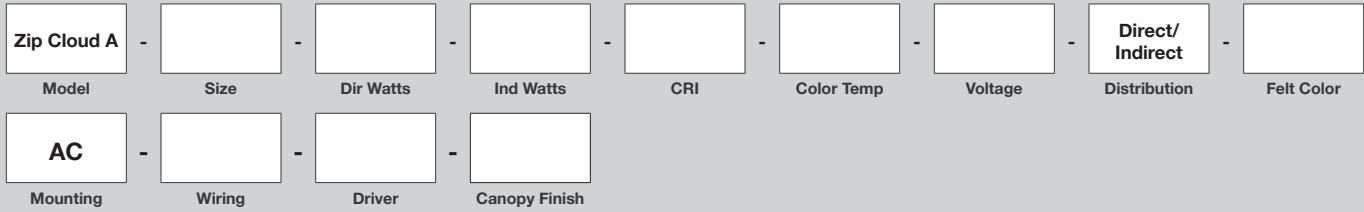

Model	Size	Direct Watts	Indirect Watts	CRI	Color Temp	Voltage	Distribution	Felt Color
Zip Cloud A	18	20, 40, 60, 70	20, 40	80	3K - 3000K	U - 120/277V	Direct/Indirect	Color ____ - Please see color options
	24	20, 40, 60, 70	20, 40	90	35K - 3500K	H - 347V		
	36	40, 80, 120, 160	20, 40, 60		4K - 4000K			
	44	80, 120, 160	20, 40, 60		5K - 5000K			

Mounting

AC - Aircraft Cable 10' Standard

Wiring

BFC 3 Wire - Black 3 Conductor Wire
BFC 5 Wire - Black 5 Conductor Wire
WFC 3 Wire - White 3 Conductor Wire
WFC 5 Wire - White 3 Conductor Wire

Driver

DIMOFF - 0-10V DIMOFF

Canopy Finish

WH - White RAL 9003
BLK - Black RAL 9004
CU - Custom
 - Please contact factory for custom finishes