

Fixture: _____ QTY: _____
Project: _____

Zip Cloud Acoustic

Surface Direct



Our Zip Cloud surface acoustic light fixture combines the best of lighting and sound absorption technology.

Our innovative lighting solution not only illuminates your environment with brilliant LED light but also enhances the acoustics of the room, creating an environment that is both visually stunning and acoustically pleasing.

Designed and Manufactured in North America.




Specifications

Efficacy	120 Lm/W
Watts	20W - 160W (see performance table)
CRI	80, 90
Lumen Maintenance	200,000+ Life Hours L70
Color Temp	2700K, 3000K, 3500K, 4000K, 5000K
Voltage	120/277, 347V
Construction	Aluminum extrusion
Dimensions	Height: 4" Diameter: 18", 24", 36", 44"
Mounting	Surface
Lens Direct	Frosted Flat
Driver	0-10 DIMOFF
Felt	Rigid Panels - 9.5mm 0.37" Thick 1500 GSM (44 opsy) 60% Recycled PET Fiber 35 Vibrant Colors
Certifications	cULus Dry and Damp Rated
Warranty	5-Year Warranty

Output Performance

Model	Watts	Lm/W	Delivered Lumens
Zip Cloud 18	20	120	2,400
	40		4,800
	60		7,200
	70		8,400
Zip Cloud 24	20	120	2,400
	40		4,800
	60		7,200
	80		9,600
Zip Cloud 36	40	120	4,800
	80		9,600
	120		14,400
	160		19,200
Zip Cloud 44	80	120	9,600
	120		14,400
	160		19,200

Dimensions

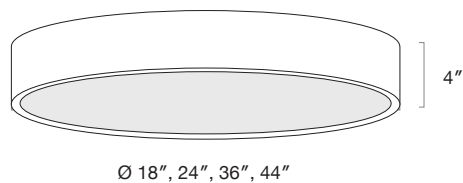


Eco Lux Designer Felt

Color Options



White



Light Grey



Sepia




Camel



Beton



Khaki



Yellow



Amber



Sand



Autumn



Brown



Chocolate



Orange



Tango



Red



Velvet




Grape



Kiwi



Grass Green



Tournament
Green



Dark Green



Pine




Aqua Blue



Cobalt



Cello Blue



Ocean Blue




Royal Blue



Dark Blue



Platinum



Medium Grey



Dark Ink




Sesame



Black

Ordering Options

Sample Configuration: Zip Cloud A - 18 - 60 - 80 - 4K - U - Direct - Tango - SU - BFC 3 Wire - DIMOFF

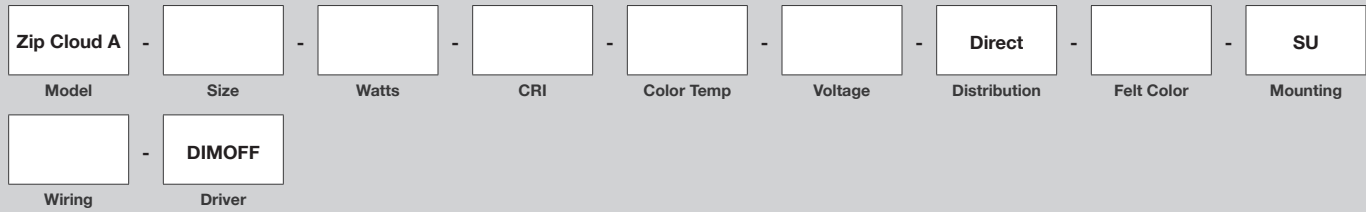

Model	Size	Watts	CRI	Color Temp	Voltage	Distribution	Felt Color	Mounting
Zip Cloud A	18	20, 40, 60, 70	80	3K - 3000K	U - 120/277V	Direct	Color ____ - Please see color options	SU - Surface
	24	20, 40, 60, 70	90	35K - 3500K	H - 347V			
	36	40, 80, 120, 160		4K - 4000K				
	44	80, 120, 160		5K - 5000K				

Wiring

BFC 3 Wire - Black 3 Conductor Wire
BFC 5 Wire - Black 5 Conductor Wire
WFC 3 Wire - White 3 Conductor Wire
WFC 5 Wire - White 3 Conductor Wire

Driver

DIMOFF - 0-10V DIMOFF