

Fixture: _____ QTY: _____

Project: _____

Thinline Ring Acoustic

Suspended Direct, Direct/Indirect

Our Ring Shaped pendant acoustic light fixture combines the best of lighting and sound absorption technology.

Our innovative lighting solution not only illuminates your environment with brilliant LED light but also enhances the acoustics of the room, creating an environment that is both visually stunning and acoustically pleasing.


Designed and Manufactured in North America.



Specifications


| | | | |
|----------------------|--|------------------------|--|
| LED | Samsung 301 3-Step MacAdam Binning L90>70,000 4000K - 120 Lm/W 3500K - 90% 3000K - 96% | Control Options | DMX, Philips SNS 300, Encelium CLM, LG Dongle, Bluetooth Mesh, Enlighted Integral |
| CRI | 80, 90 | Circuits | 1 and 2 |
| Dir Lumens/Ft | 250Lm, 500Lm, 750Lm, 1000Lm (custom up to 1200Lm) | Accessories | 10kV Surge Protection, Emergency Battery, Generator Transfer Device |
| Ind Lumens/Ft | 250Lm, 500Lm, 750Lm, 1000Lm (custom up to 1200Lm) | Wiring | 5 Wire Optional: 5 Leads, 6 Wire (cable, emergency battery option) |
| Color Temp | 2700K, 3000K, 3500K, 4000K, 5000K | Felt | 100% Post-consumer recycled polyester Thickness: 3.175mm 0.125" 500 gsm (14.75 opsy) E84 compliant 33 Vibrant colors |
| Voltage | 120/277, 347V | Certifications | cULus Dry and Damp Rated |
| Construction | Aluminum extruded with cast end caps | Warranty | 5-Year Warranty |
| Dimensions | Widths: 2.25", 3.18", 4.5" Lengths: 2 - 8' Continuous Run: Min 2' (1' increments, 6" available) | | |
| Mounting | Aircraft Cable 10" | | |
| Lens | Direct: Frosted Flat Indirect: Frosted | | |
| Driver | 0-10 DIMOFF Optional: DALI, Lutron, Philips SR, ELDO | | |

Lens Options - Direct Distribution





Standard
Frosted Flat

Lens Options - Indirect Distribution




Standard
Frosted

Dimensions

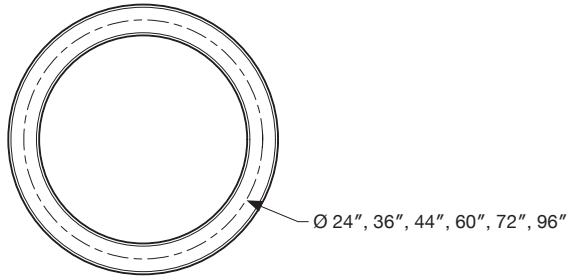

Mounting Options



Ø 4.5"
Power Feed



Ø 2"
Non Power Feed


Aircraft Cable ACY

Eco Lux Designer Felt Color Options



Ordering Options

Sample Configuration: DTL A RING 3.18 S D - 44 - D500 - I500 - 80 - 4K - U - FR - FR - DB-16 - AC - DIMOFF - N - 1 - N - N - CL - 6 - WH

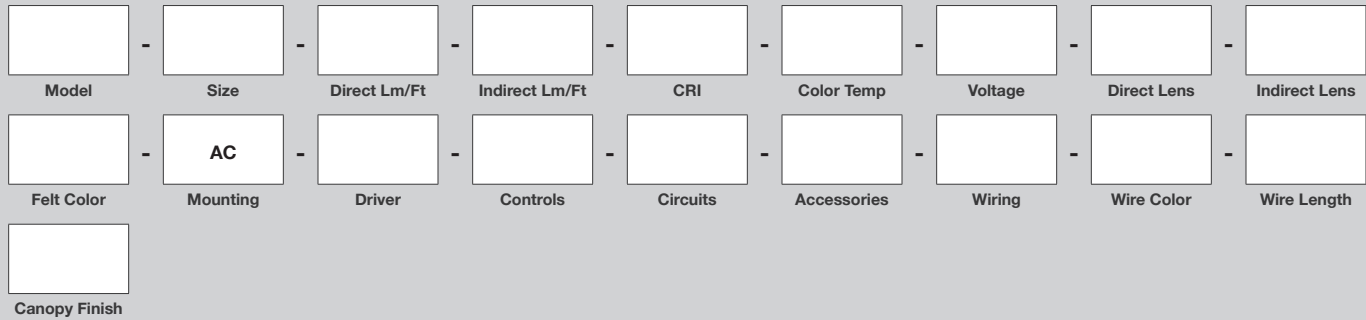

| Model | Size | Direct Lm/ft | Indirect Lm/ft | CRI | Color Temp | Voltage |
|---------------------------------|------|----------------------------|----------------------------|-----|-------------|--------------|
| DTL A RING 3.18 S D | 24 | D 250 | I 250 | 80 | 27K - 2700K | U - 120/277V |
| DTL A RING 3.18 D I | 36 | D 500 | I 500 | 90 | 3K - 3000K | H - 347V |
| SD - Suspended Direct | 44 | D 750 | I 750 | | 35K - 3500K | |
| SDI - Suspended Direct-Indirect | 60 | D 1000 | I 1000 | | 4K - 4000K | |
| | 72 | D ____ (custom up to 1200) | I ____ (custom up to 1200) | | 5K - 5000K | |
| | 96 | | | | | |

| Direct Lens | Indirect Lens | Felt Color | Mounting | Driver |
|-------------------|---------------|--|----------------------------------|---|
| FR - Frosted Flat | FR - Frosted | Color ____ - Please see color options | AC - Aircraft Cable 10' Standard | DIMOFF - 0-10 DIMOFF <i>Optional</i> DALI - Digital Addressable Lighting Interface LUTRON - Lutron Ecosystem SR - Philips SR ELDO - 1% ELDO (347 only 1-10 5%) |

| Controls | Circuits | Accessories | Wiring | Wire Color |
|--|--------------------------------|---|--|---|
| N - None <i>Optional</i> DMX - Digital Multiplex SNS - Philips SNS 300 w/BLD & Daylight CLM - Encelium CLM LG - LG Dongle BT - Bluetooth Mesh EN - Enlighted Integral | 1 - 1 Circuit 2 - 2 Circuit | N - None <i>Optional</i> 10kV - 10kV Surge Protection EM - Emergency Battery +GTD - Generator Transfer Device | 5 Wire - 5 Wire Standard <i>Optional</i> N - 5 Leads 6 WIRE - 6 Wire - Cable (EM - Emergency Battery Option) | CL - Clear <i>Optional</i> B - Black W - White |

| Wire Length | Canopy Finish |
|-----------------------------|--|
| Length(ft) ____ 6' Standard | WH - White RAL 9003 BLK - Black RAL 9004 CU - Custom - Please contact factory for custom finishes |