


Thinline Shapes

Octagon





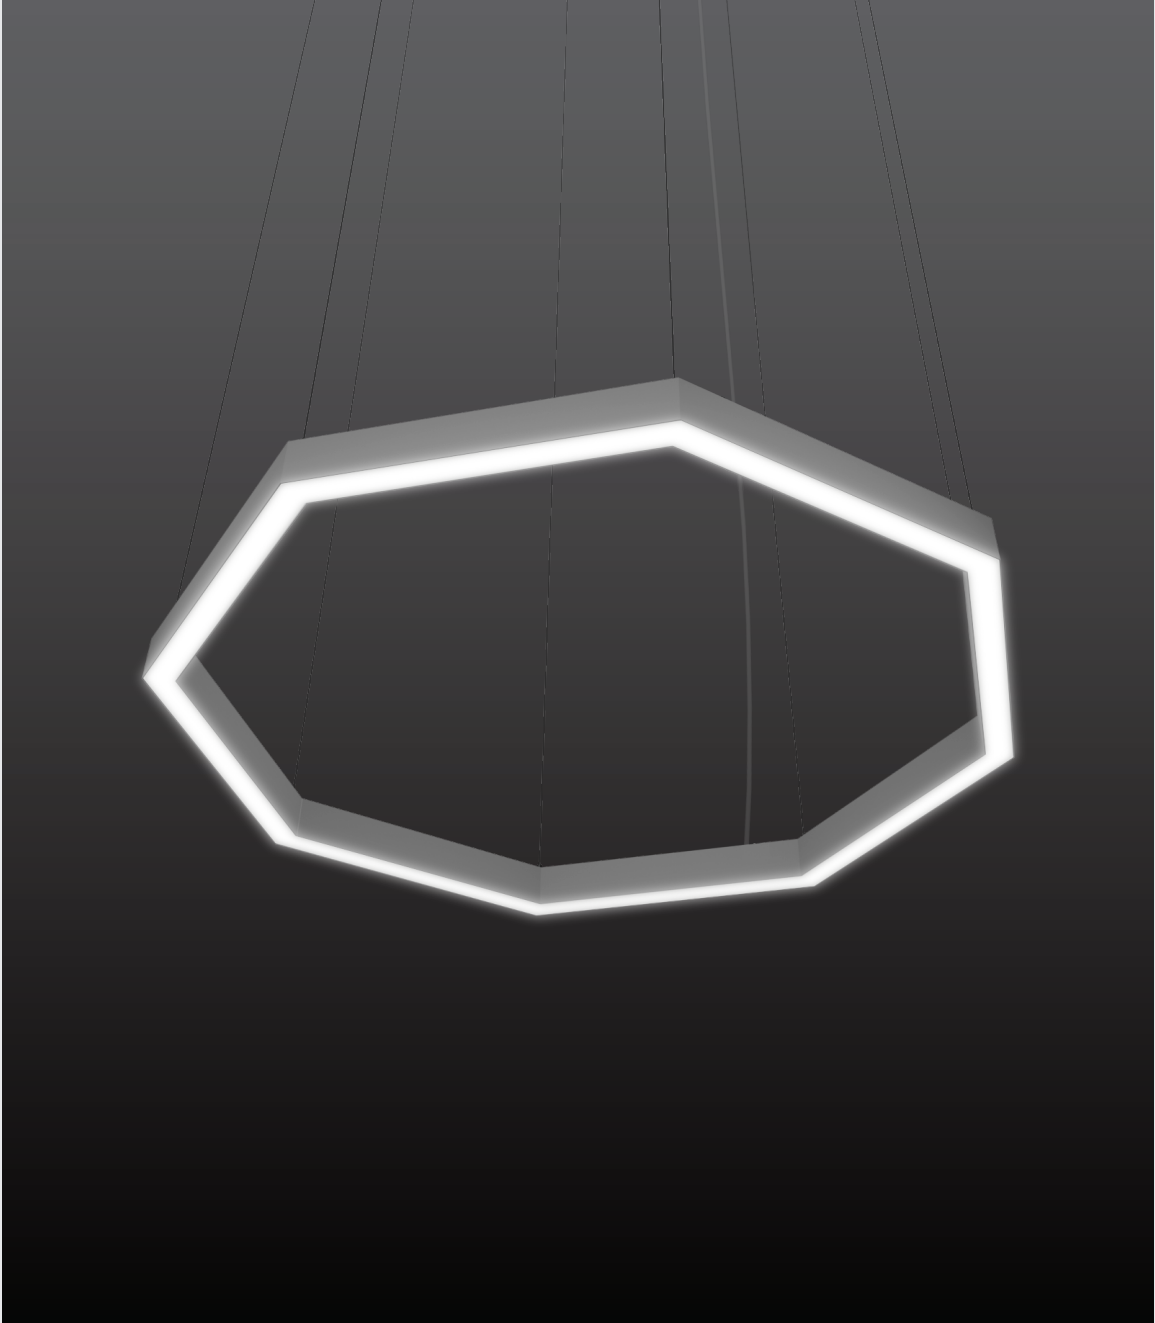



Thinline Shapes Series

Octagon

Architectural luminaire

Aluminum extruded body

Octagonal shaped design

Pendant mounting

Direct and Direct-Indirect distribution options.

3 standards sizes.

Multiple finish options

Designed and manufactured in North America.

Specifications

LED

L90>70,000
 Samsung 301 3 McAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%

Color Temp

2700K
 3000K
 3500K
 4000K
 5000K

Performance

Model	Lm/W
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W

Lumens/ft (direct/indirect)

250
 500
 750
 1000
 1200 (custom options)

Lens

Frosted
 Frosted Regressed
 Batwing (indirect)

Optics


Direct / Indirect

Finish Options


Standard



Grey
 RAL 7046
 Sandtex



Black
 RAL 9004
 Sandtex



White
 RAL 9003
 Sandtex

Custom



Orange
 RAL 2009
 Sandtex



Green
 RAL 6010
 Sandtex




Blue
 RAL 5012
 Sandtex



Yellow
 RAL 1037
 Sandtex



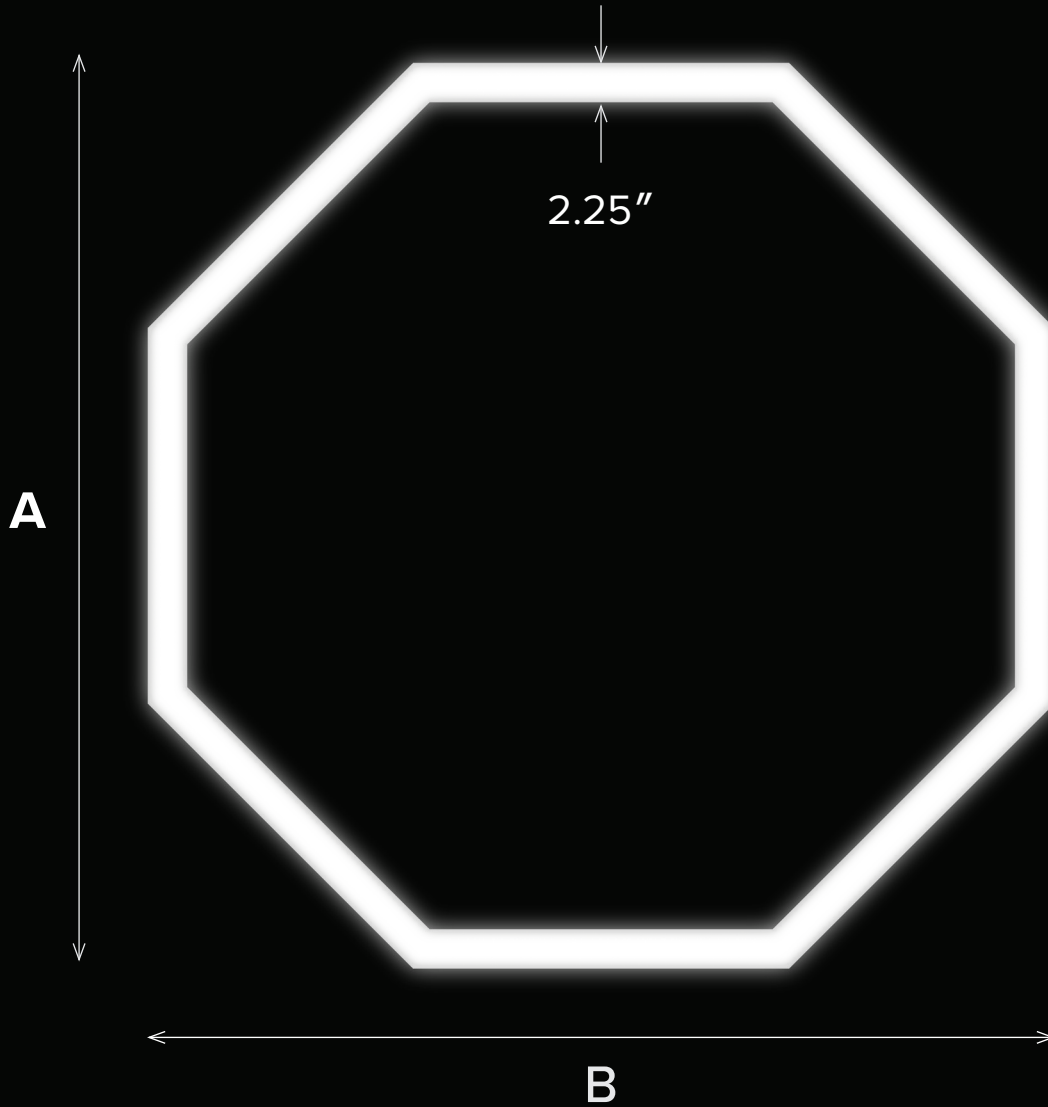

Model	A	B	Height
8 x 2FT	61.4"	61.4"	4"
8 x 3FT	90.4"	90.4"	
8 x 4FT	119.3"	119.3"	

Note: 8 x 2FT - 1 Piece | 8 x 3FT - 2 Pieces | 8 x 4FT - 4 Pieces





Ordering Guide

Model	Size	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage
DTL OCTA	8 x 2FT	D 250	I 250	80	27K 2700K	U 120/277V
	8 x 3FT	D 500	I 500	90	3K 3000K	H 347V
	8 x 4FT	D 750	I 750		35K 3500K	
	Custom Sizes Available - Please Consult Factory	D 1000	I 1000		4K 4000K	
		D _____	I _____		5K 5000K	

(custom up to 1200) (custom up to 1200)

Direct Lens	Indirect Lens	Finish	Mounting	Driver
FR Frosted	FR Frosted	GRY Grey	AC Aircraft Cable	DIMOFF 0-10 1% DIMOFF
FRREG Frosted Regressed	BATWING Batwing	WH White	10' Std	LUTRON Lutron Ecosystem
	<i>Indirect Lens: Minimum size 8FT x 2FT</i>	BLK Black		SR Philips SR
		CU Custom		DALI
				ELDO .1% ELDO (347 only 1-10 5%)

Controls	Circuits	Accessories	Wiring
N None	1 1 Circuit	N None	N None
DMX	2 2 Circuits	10kV 10kV Surge Protection	BFC3 3 Wire Cord Black
SNS Philips SNS 300 w/BLD & Daylight		EMBAT 6W 90 Min Battery	WFC3 3 Wire Cord White
CLM Encelium CLM			IN3 3 Wire Internal
LG LG Dongle			IN5 5 Wire Internal
BT Bluetooth Mesh			CFC Architectural Cable - 5 Wire
EN Enlighted Integral			BFC5 5 Wire Cord Black
			WFC5 5 Wire Cord White

Wire Color	Wire Length	Canopy Color
G Grey	_____ FT (6FT Standard)	WH White
W White		BLK Black
B Black		CU Custom
C Clear		

DTL OCTA	Model	Size	Direct Lm/Ft	Indirect Lm/Ft	CRI	Color Temp	Voltage	Direct Lens	Indirect Lens	Finish
	Mounting	Driver	Controls	Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color	



delviro energy

94 Brockport Drive
Toronto, ON M9W 7J8
T: 1-877-502-3434
info@delviro.com

delviro.com