

Fixture: _____ QTY: _____

Project: _____


Thinline Suspended

Direct, Direct/Indirect, Indirect

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body.

Pendant mounting. Cast end caps with light block. Direct, direct-indirect, and indirect distribution options. 2.25", 3.18", and 4.5" widths. Continuous runs available. Multiple finish options. Acoustic option with designer felt. Dry and damp rated.

Designed and manufactured in North America

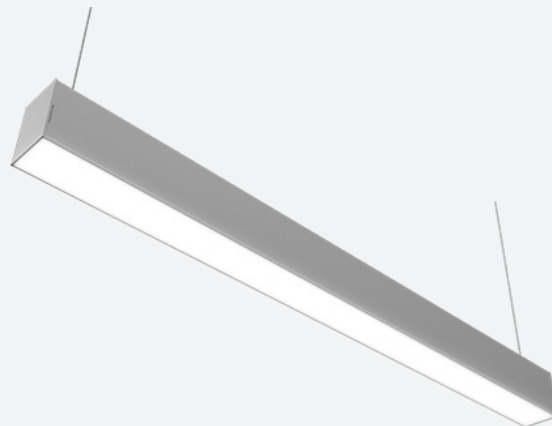


Model: Thinline 3.18




Specifications

LED	Samsung 301 3-Step MacAdam Binning L90>70,000 4000K - 120 Lm/W 3500K - 90% 3000K - 96%	Driver	0-10 DIMOFF Optional: DALI, Lutron, Philips SR, ELDO
CRI	80, 90	Control Options	DMX, Philips SNS 300, Encelium CLM, LG Dongle, Bluetooth Mesh, Enlighted Integral
Lumens/Ft	250Lm, 500Lm, 750Lm, 1000Lm (custom up to 1200Lm)	Circuits	1 and 2
Color Temp	2700K, 3000K, 3500K, 4000K, 5000K	Accessories	10kV Surge Protection, Emergency Battery, Generator Transfer Device
Voltage	120/277, 347V	Wiring	5 Leads Optional: 5 Wire, 6 Wire (cable, emergency battery option)
Construction	Aluminum extruded with cast end caps	Finishes (RAL)	Black - RAL 9004 Grey - RAL 7046 White - 9003 Custom
Dimensions	Widths: 2.25", 3.18", 4.5" Lengths: 2 - 8' Continuous Run: Min 2' (1' increments, 6" available)	Certifications	DLC Listed cULus
Mounting	Aircraft Cable 10" Standard Optional: Thread Rod, T-Bar 9/16 Clip, T-Bar 15/16 Clip	Warranty	5-Year Warranty
Lens Direct	Frosted Flat Optional: Frosted Regressed, Asymmetric 0.5" Drop Lens, 1" Drop Lens, Louver		
Lens Indirect	Frosted Flat Optional: Asymmetric, Batwing		


Lens Options - Direct Distribution




Standard
Frosted Flat




Frosted
0.25" Regressed



Asymmetric
Clear




0.5" Drop Lens




1.5" Drop Lens
Note: For 2.25 and 3.18 model widths only


Lens Options - Indirect Distribution



Standard
Frosted







Asymmetric



Batwing


Dimensions




2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"

Actual Length = NOMINAL +.2"

Mounting Options

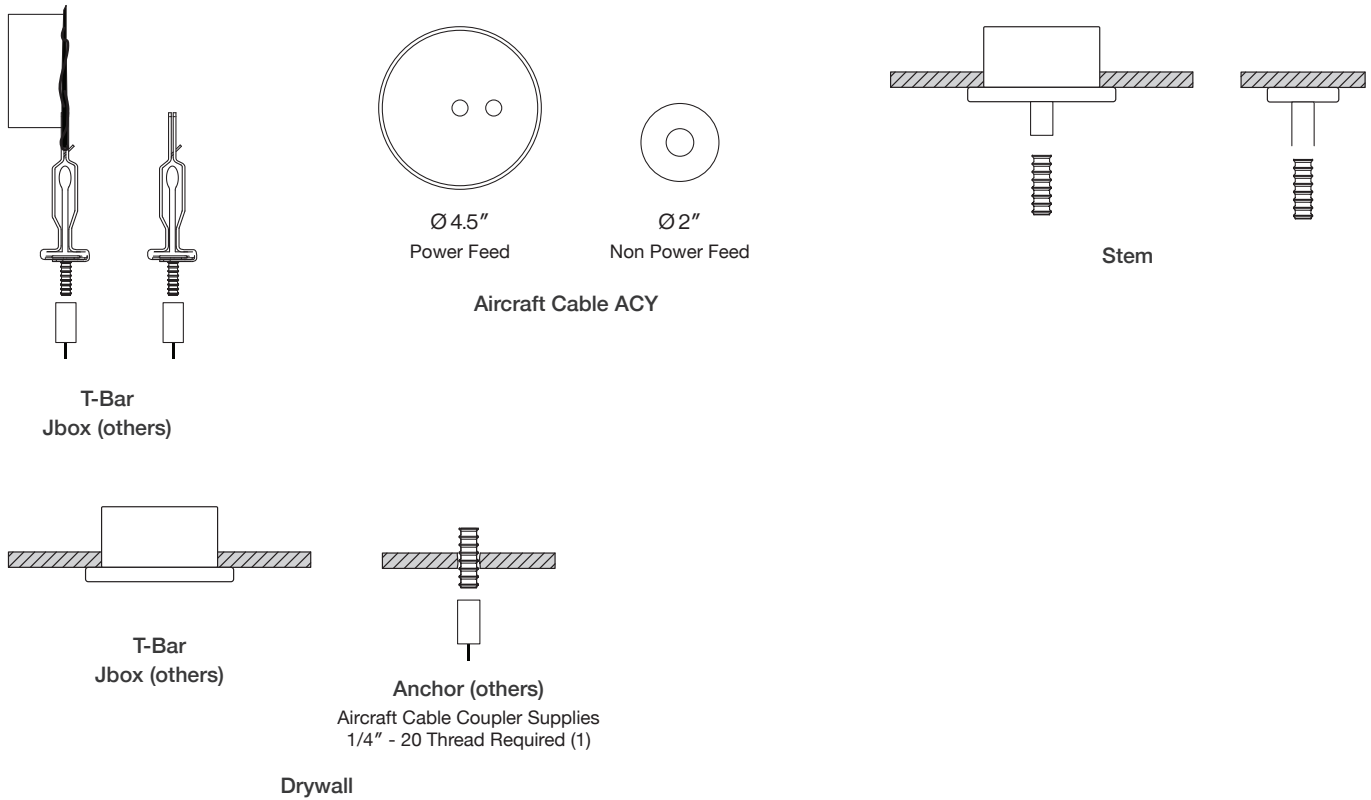

Mounting Locations

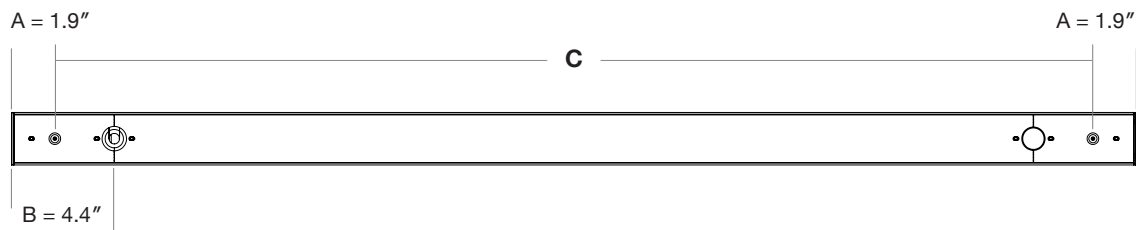

Model	Lengths - C
DTL 2	20.5"
DTL 3	32.5"
DTL 4	44.5"
DTL 5	56.5"
DTL 6	68.5"
DTL 7	80.5"
DTL 8	92.5"

Finish Options

Standard RAL Finishes



Sample Custom RAL Finishes



Custom Finishes - Please contact factory
Additional Finishes Available - Please contact factory

Sample Configuration: DTL SD - 3.18 - 8 - D500 - I500 - 80 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 1 - N - N - CL - 6 - WH

Model - Width - CR - Direct Lm/Ft - Indirect Lm/Ft - CRI - Color Temp - Voltage - Direct Lens - Indirect Lens - Felt Color - Mounting - Driver - Controls - Circuits - Accessories - Wiring - Wire Color - Wire Length - Canopy Finish

Model	Width	Continuous Run (CR)	Direct Lm/Ft	Indirect Lm/Ft	CRI
DTL SD D	2.25	CR _____	D 250	I 250	80
DTL SD DI	3.18	Min 2Ft (1Ft increments,	D 500	I 500	90
DTL SD I	4.5	Unibody up to 8Ft)	D 750	I 750	
SD D - Suspended Direct		Optional	D 1000	I 1000	
SD DI - Suspended Direct-Indirect		- Available in 6-inch increments	D_____ (custom up to 1200)	I_____ (custom up to 1200)	
SD I - Suspended Indirect					
Color Temp	Voltage	Direct Lens	Indirect Lens	Finish	Mounting
27K - 2700K	U - 120/277V	FR - Frosted Flat	FR - Frosted	WH - White	AC - Aircraft Cable 10' Standard
3K - 3000K	H - 347V	Optional	Optional	BLK - Black	Optional
35K - 3500K		FFREG - Frosted Regressed	ASY - Asymmetric	GRY - Grey	STB 9/16 - T-Bar 9/16
4K - 4000K		ASY - Asymmetric Clear	BATWING - Batwing	CU - Custom	STB 15/16 - T-Bar 15/16
5K - 5000K		0.5 FRDRP - 0.5" Frosted Drop Lens		For custom finishes	
		1.5 FRDRP - 1" Frosted Drop Lens		please specify RAL	
		LVR - Louver		number	
		Note: 1.5 Frosted Drop Lens for			
		2.25 and 3.18 model widths only			
Driver	Controls	Circuits	Accessories	Wiring	
DIMOFF - 0-10 DIMOFF	N - None	1 - 1 Circuit	N - None	N - 5 Leads	
Optional	Optional	2 - 2 Circuit	Optional	Optional	
DALI - Digital Addressable	DMX - Digital Multiplex		10kV - 10kV Surge Protection	5 WIRE - 5 Wire	
Lighting Interface	SNS- Philips SNS 300 w/BLD & Daylight		EM - Emergency Battery	6 WIRE - 6 Wire - Cable	
LUTRON - Lutron Ecosystem	CLM - Encelium CLM		+GTD - Generator Transfer Device	(EM - Emergency	
SR - Philips SR	LG - LG Dongle			Battery Option)	
ELDO - 1% ELDO (347 only	BT - Bluetooth Mesh				
1-10 5%)	EN - Enlighted Integral				
Wire Color	Wire Length	Canopy Finish			
CL - Clear	Length(ft)_____ 6' Standard	WH - White RAL 9003			
Optional		BLK - Black RAL 9004			
B - Black		CU - Custom			
W - White		- Please contact factory			
		for custom finishes			