

Fixture: _____ QTY: _____

Project: _____

Thinline Wall Mount

Direct, Direct/Indirect, Indirect

Architectural luminaire. Wall mount lighting. Contemporary and minimal design.

Aluminum extruded body. Cast end caps with light block. Direct, direct-indirect, and indirect distribution options. 2.25", 3.18", and 4.5" widths. Continuous runs available. Multiple finish options. Acoustic option with designer felt. Dry and Damp rated.

Designed and manufactured in North America




Model: Thinline 4.5


Specifications

LED	Samsung 301 3-Step MacAdam Binning L90>70,000 4000K - 120 Lm/W 3500K - 90% 3000K - 96%	Driver	0-10 DIMOFF Optional: DALI, Lutron, Philips SR, ELDO
CRI	80, 90	Control Options	DMX, Philips SNS 300, Encelium CLM, LG Dongle, Bluetooth Mesh, Enlighted Integral
Lumens/Ft	250Lm, 500Lm, 750Lm, 1000Lm (custom up to 1200Lm)	Circuits	1 and 2
Color Temp	2700K, 3000K, 3500K, 4000K, 5000K	Accessories	10kV Surge Protection, Emergency Battery, Generator Transfer Device
Voltage	120/277, 347V	Wiring	5 Leads Optional: 5 Wire, 6 Wire (cable, emergency battery option)
Construction	Aluminum extruded with cast end caps	Finish (RAL)	Black - RAL 9004 Grey - RAL 7046 White - 9003 Custom
Dimensions	Widths: 2.25", 3.18", 4.5" Lengths: 2 - 8' Continuous Run: Min 2' (1' increments, 6" available)	Certifications	DLC Listed cULus
Mounting	Wall Mounted Bracket Optional: 12" Extended Wall Mounted Arm	Warranty	5-Year Warranty
Lens Direct	Frosted Flat Optional: Frosted Regressed, Asymmetric 0.5" Drop Lens, 1" Drop Lens, Louver		
Lens Indirect	Frosted Flat Optional: Asymmetric, Batwing		


Lens Options - Direct Distribution




Standard
Frosted Flat




Frosted
0.25" Regressed



Asymmetric
Clear




0.5" Drop Lens




1.5" Drop Lens

Note: For 2.25 and 3.18 model widths only


Lens Options - Indirect Distribution



Standard
Frosted







Asymmetric



Batwing

Dimensions




2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"

Actual Length = NOMINAL +.2"

Mounting


Wall Mount Bracket

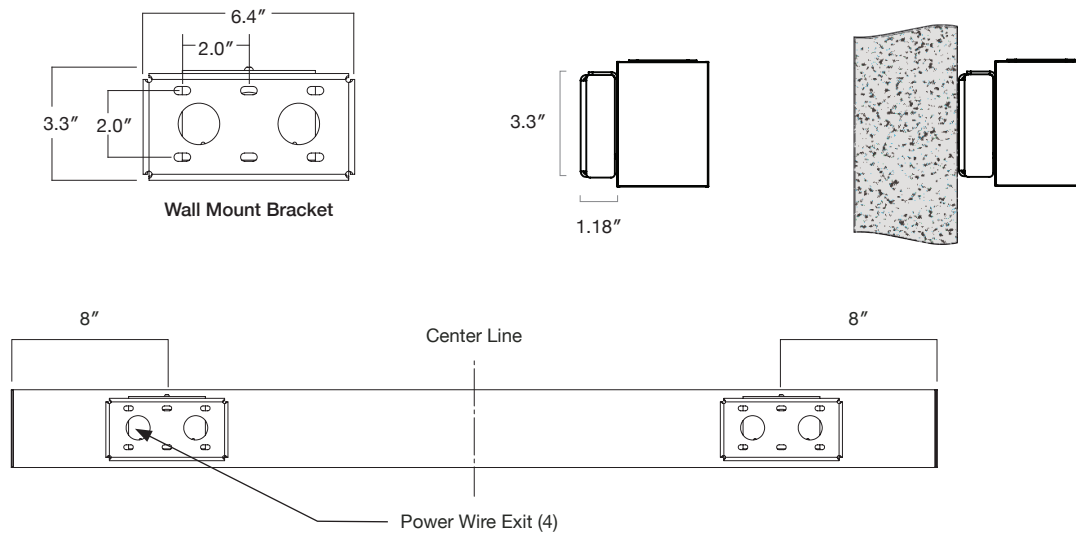

Mounting Locations

Model	Mounting Reference
DTL 2	Centerline
DTL 3	
DTL 4	8" From Fixture Ends
DTL 5	
DTL 6	
DTL 7	Centerline & 8" From Fixture Ends
DTL 8	

12" Extended Arm



Finish Options

Standard RAL Finishes




Sample Custom RAL Finishes



Custom Finishes - Please contact factory
Additional Finishes Available - Please contact factory

Ordering Options

Sample Configuration: DTL WM - 3.18 - 8 - D500 - I500 - 80 - 4K - U - FR - FR - WH - AC - DIMOFF - N - 1 - N - N

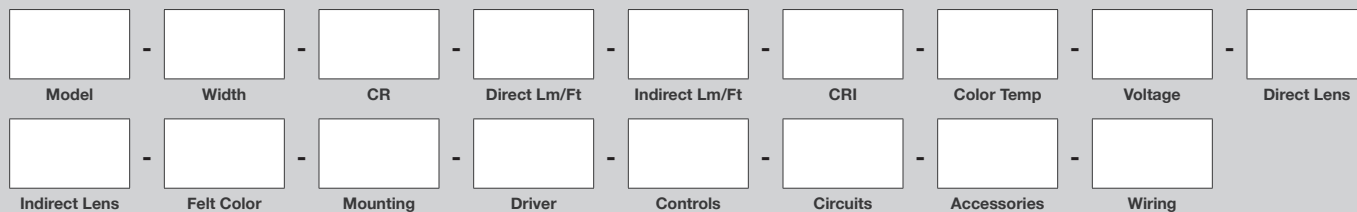

Model	Width	Continuous Run (CR)	Direct Lm/Ft	Indirect Lm/Ft	CRI
DTL WM D	2.25	CR _____	D 250	I 250	80
DTL WM DI	3.18	Min 2Ft (1Ft increments,	D 500	I 500	90
DTL WM I	4.5	Unibody up to 8Ft)	D 750	I 750	
WM D - Wall Mount Direct		Optional	D 1000	I 1000	
WM DI - Wall Mount Direct-Indirect		- Available in 6-inch increments	D____ (custom up to 1200)	I____ (custom up to 1200)	
WM I - Wall Mount Indirect					
Color Temp	Voltage	Direct Lens	Indirect Lens	Finish	Mounting
27K - 2700K	U - 120/277V	FR - Frosted Flat	FR - Frosted	Black - RAL 9004	WM - Wall Mount Bracket
3K - 3000K	H - 347V	Optional	Optional	Grey - RAL 7046	Optional
35K - 3500K		FFREG - Frosted Regressed	ASY - Asymmetric	White - 9003	12EX - 12" Extended Wall Mounted
4K - 4000K		ASY - Asymmetric Clear	BATWING - Batwing	Custom	Arm
5K - 5000K		0.5 FRDRP - 0.5" Frosted Drop Lens			
		1.5 FRDRP - 1" Frosted Drop Lens			
		LVR - Louver			
		Note: 1.5 Frosted Drop Lens for 2.25 and 3.18 model widths only			
Driver	Controls	Circuits	Accessories	Wiring	
DIMOFF - 0-10 DIMOFF	N - None	1 - 1 Circuit	N - None	N - 5 Leads	
Optional	Optional	2 - 2 Circuit	Optional	Optional	
DALI - Digital Addressable Lighting Interface	DMX - Digital Multiplex		10kV - 10kV Surge Protection	5 WIRE - 5 Wire	
LUTRON - Lutron Ecosystem	SNS- Philips SNS 300 w/BLD & Daylight		EM - Emergency Battery	6 WIRE - 6 Wire - Cable	
SR - Philips SR	CLM - Encelium CLM		+GTD - Generator Transfer Device	(EM - Emergency Battery Option)	
ELDO - 1% ELDO (347 only 1-10 5%)	LG - LG Dongle				
	BT - Bluetooth Mesh				
	EN - Enlighted Integral				