

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_

# Thinline Wall Mount

## Designer Series | Direct, Direct-Indirect, Indirect

Enhance your space with our designer line of luminaires. Our premium vinyl finish offers a range of patterns and textures that provide a stunning and realistic finish.



### Features

Aluminum extruded body. Cast end caps with light block. Wall mounting. 2.25", 3.18", and 4.5" widths. Continuous runs available. Multiple vinyl finishes. Dry and Damp rated.

DLC Listed | cULus Listed

Designed and manufactured in North America  
5 Year Warranty



Model: Thinline 3.18

### Ordering Options

Sample Configuration: DTL V WM D - 3.18 - 8 - D 500 - 90 - 4K - U - FR - W373 - WM - DIMOFF - N - 1 - N - 5WIRE - CL - 10 - WH

Model	Width	Continuous Run	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp
DTL V WM D	2.25	CR _____	D 250	I 250	80	27K 2700K
DTL V WM DI	3.18	Min 2Ft (1Ft increments, Unibody up to 8Ft)	D 500	I 500	90	3K 3000K
DTL V WM I	4.5		D 750	I 750		35K 3500K
			D 1000	I 1000		4K 4000K
WM D - Wall Mount Direct		Optional	D _____ (custom up to 1200)	I _____ (custom up to 1200)		5K 5000K
WM DI - Wall Mount Direct-Indirect		- Available in 6-inch increments				
WM I - Wall Mount Indirect						


Voltage	Direct Lens	Indirect Lens	Vinyl Finish	Mounting
U 120/277V H 347V	FR Frosted Flat  <i>Optional</i> FFREG Frosted Regressed ASY Asymmetric Clear 0.5 FRDRP 0.5" Frosted Drop Lens 1.5 FRDRP 1.5" Frosted Drop Lens LVR Louver Lens  <i>Note: 1.5 Frosted Drop Lens for 2.25 and 3.18 model widths only</i>	FR Frosted Flat  <i>Optional</i> ASY Asymmetric Clear BATWING Batwing	Code _____ - Please see Finish Options - Please contact factory for additional finishes	WM Wall Mount Bracket  <i>Optional</i> 12EX 12" Extended Arm

Driver	Controls	Circuits	Accessories	Wiring
DIMOFF 0-10V DIMOFF  <i>Optional</i> DALI Digital Addressable Lighting Interface LUTRON Lutron Ecosystem SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None  <i>Optional</i> DMX Digital Multiplex SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral	1 1 Circuit 2 2 Circuits	N None  <i>Optional</i> 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device  <i>Note: - For Emergency Battery (EM), minimum length is 4' (direct distribution), 6' (indirect distribution)</i>	N 5 Leads  <i>Optional</i> 5 WIRE 5 Wire 6 WIRE 6 Wire - Cable (EM - Emergency Battery Option)


**LED**

L90>70,000  
 Samsung 301 3-Step MacAdam Binning  
 4000K 120 Lm/W  
 3500K 98%  
 3000K 96%  
 90 CRI 85%


**Lens Options - Direct Distribution**




Standard  
Frosted Flat




Frosted  
0.25" Regressed



Asymmetric  
Clear




0.5" Drop Lens




1.5" Drop Lens


**Lens Options - Indirect Distribution**



Standard  
Frosted





Asymmetric



Batwing

**Dimensions**

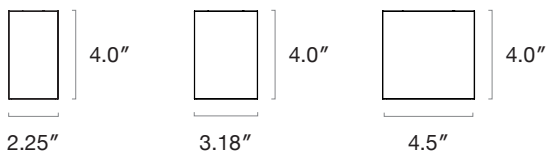


2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"

Actual Length = NOMINAL +.2"

## Mounting Options


### Wall Mount Bracket

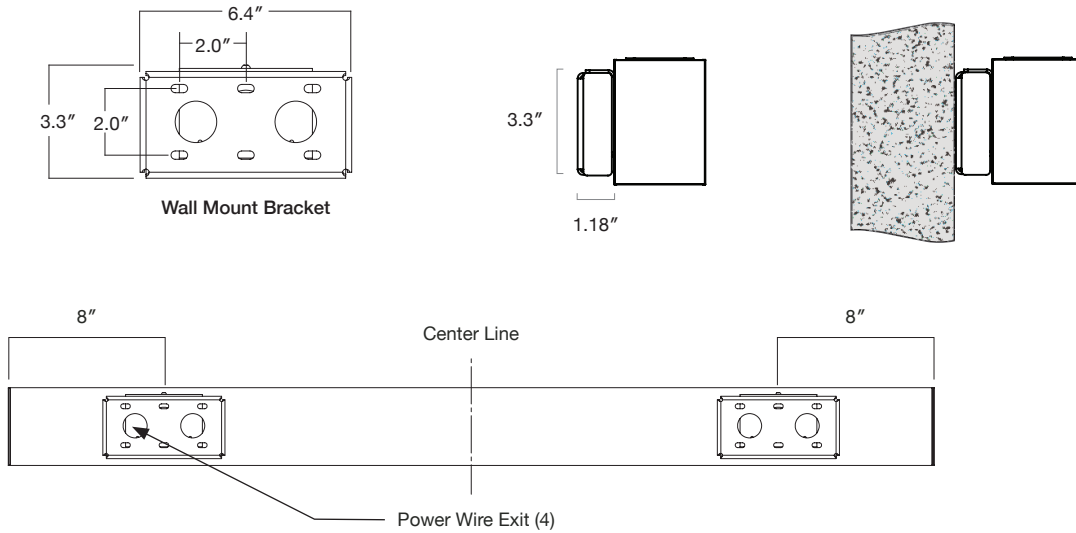


### Mounting Locations

Model	Mounting Reference
DTL 2	Centerline
DTL 3	
DTL 4	8" From Fixture Ends
DTL 5	
DTL 6	
DTL 7	Centerline & 8" From Fixture Ends
DTL 8	

### 12" Extended Arm




## Finish Options




**Ash Wood**  
ZX159




**Wash Oak**  
W373




**Maple Wood**  
W17



**Antique Wood**  
W274



**Herringbone -  
Fabric**  
RF007



**Black Marble**  
NS804



**White Marble**  
NS895




**Grey Marble**  
PM007



**Granite**  
NS120



**Aluminum**  
NS120



**Metal Grey**  
RM001



**Gold Crack**  
PZ05

Additional Finishes Available - *Please contact factory*