

Fixture: _____ QTY: _____ Project : _____

Thinline Curve

Designer Series | Direct, Direct-Indirect


Enhance your space with our designer line of luminaires. Our premium vinyl finish offers a range of patterns and textures that provide a stunning and realistic finish.

Features

Architectural luminaire. Contemporary design. Aluminum extruded body. Pendant mounting. Direct and Direct-Indirect distribution. Frosted lens. 3.18" wide by 4.125" high. 4' linear length with a 5' radius and 45° curve. Continuous runs available. Multiple vinyl finishes. Dry and Damp rated.

cULus Listed

Designed and manufactured in North America
5 Year Warranty

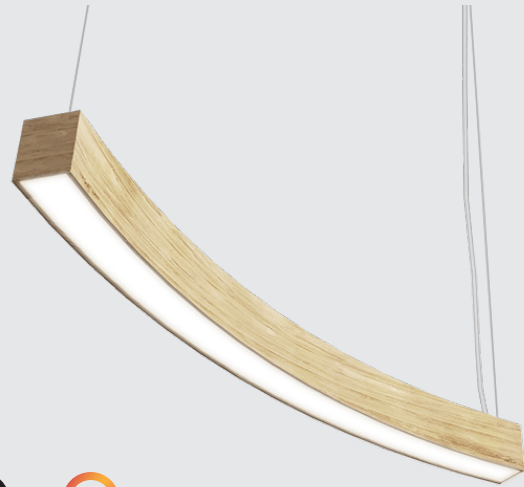

Ordering Options

Sample Configuration: DTL V CRV - C - 8 - 80 - 5 - 5- 4K - U - FR - ZX15 - AC - DIMOFF - N - 1 - N - 5WIRE - CL - 8 - WH

Model	Connection	Continuous Run	CRI	Direct Watts/ft	Indirect Watts/ft	Color Temp	Voltage
DTL V CRV	C S	CR _____	80	2.5	2.5	27K 2700K	U 120/277V
		Please specify number of sections	90	3.5	3.5	3K 3000K	H 347V
				5	5	35K 3500K	
				7.5	7.5	4K 4000K	
				10	10	5K 5000K	

Lens (Direct/Indirect)	Vinyl Finish	Mounting	Driver	Controls
FR Frosted	Code _____ - Please see Finish Options - Please contact factory for additional finishes	AC Aircraft Cable 10' (Std)	DIMOFF 0-10 DIMOFF Optional DALI Digital Addressable Lighting Interface LUTRON Lutron Ecosystem SR Philips SR ELDO .1% ELDO (347 only 1-10 5%)	N None Optional DMX Digital Multiplex SNS Philips SNS 300 w/BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral

Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Color
1 1 Circuit 2 2 Circuits	N None Optional 10kV 10kV Surge Protection EM Emergency Battery +GTD Generator Transfer Device Note: - For Emergency Battery (EM), minimum length is 4' (direct distribution), 8' (indirect distribution)	5 WIRE 5 Wire (Std) Optional 6 WIRE 6 Wire N 5 Leads	CL Clear Optional B Black W White	Length(Ft) - 6Ft (Std)	WH White GRY Grey BLK Black CU Custom - Consult factory for custom finishes

Specifications

Efficacy:	100 Lm/W
CRI:	80 90
Color Temperature:	3000K, 3500K, 4000K, 5000K
Lumen Maintenance:	200,000+ Life Hours (L70)
Voltage:	120/277V 347V
Operating Temperature:	-20°C to +40°C -4°F to +104°F
Controls:	0-10V Dimming
Mounting:	Aircraft Cable

Output Performance - Direct

Model	Watts/Ft	Lm/W	Delivered Lumens/Per Foot	Delivered Lumens/Per Section
DTL Curve	2.5	100	250	1,000
	3.5	100	350	1,400
	5	100	500	2,000
	7.5	100	750	3,000
	10	100	1000	5,000


- Watts per foot available on all lengths
- LPW is with Frosted Lens

Output Performance - Indirect


Model	Watts/Ft	Lm/W	Delivered Lumens/Per Foot	Delivered Lumens/Per Section
DTL Curve	2.5	100	250	1,000
	3.5	100	350	1,400
	5	100	500	2,000
	7.5	100	750	3,000
	10	100	1000	5,000

- Watts per foot available on all lengths
- LPW is with Frosted Lens

Lens Options - Direct Distribution




Lens Options - Indirect Distribution




Standard
Frosted

Dimensions

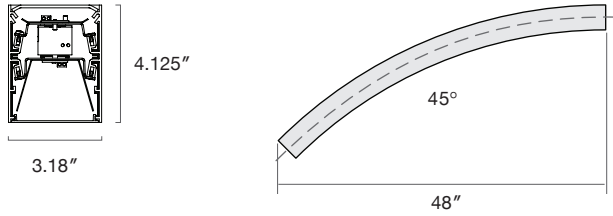


Note: End Cap Thickness=0.1". Add additional two End Cap thickness of 0.2" to length

Mounting




Aircraft Cable

Connection Type




C - Connect




S - Connect


Sample Configurations




8x4' Section
Circle



4x4' Section
1/2 Circle



2x4' Section
1/4 Circle



4' Section
Linear Shapes


Finish Options




Ash Wood
ZX159




Wash Oak
W373




Maple Wood
W17



Antique Wood
W274




**Herringbone -
Fabric**
RF007




Black Marble
NS804



White Marble
NS895




Grey Marble
PM007




Granite
NS120



Aluminum
NS120




Metal Grey
RM001



Gold Crack
PZ05

Additional Finishes Available - *Please contact factory*

Canopy Finish Options



Signal White
RAL 9003



Telegrey 2
RAL 7046



Signal Black
RAL 9004

Additional Finishes Available - *Please contact factory*