

Fixture: _____ QTY: _____ Project : _____

Thinline Suspended

Designer Series | Direct

Enhance your space with our designer line of luminaires. Our premium vinyl finish offers a range of patterns and textures that provide a stunning and realistic finish.

Features

Aluminum extruded body. Cast end caps with light block. Pendant mounting. 2.25", 3.18", and 4.5" widths. Continuous runs available. Multiple vinyl finishes. Dry and Damp rated.

DLC Listed | cULus Listed

Designed and manufactured in North America
5 Year Warranty



Model: Thinline 3.18

Ordering Options

Sample Configuration: DTL V S D - 3.18 - 8 - D 500 - 90 - 4K - U - FR - W17 - AC - DIMOFF - N - 1 - N - 5WIRE - CL - 10 - WH

Model	Width	Continuous Run	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp	Voltage
DTL V S D	2.25	CR _____	D 250	I 250	80	27K 2700K	U 120/277V
DTL V S DI	3.18	Min 2Ft (1Ft increments,	D 500	I 500	90	3K 3000K	H 347V
DTL V S I	4.5	Unibody up to 8Ft))	D 750	I 750		35K 3500K	
		Optional	D 1000	I 1000		4K 4000K	
SD - Suspended Direct		- Available in 6-inch	D _____ (custom	I _____ (custom		5K 5000K	
SDI - Suspended Dir-Ind		increments	up to 1200)	up to 1200)			
SI - Suspended Indirect							

--	--	--	--	--	--	--

Direct Lens	Indirect Lens	Vinyl Finish	Mounting	Driver
FR Frosted Flat	FR Frosted	Code _____	AC Aircraft Cable 10' Std	DIMOFF 0-10V DIMOFF
Optional	Optional	- Please see Finish Options	Optional	Optional
FFREG Frosted Regressed	ASY Asymmetric Clear	- Please contact factory for additional finishes	TR Threaded Rod _____	LUTRON Lutron Ecosystem
ASY Asymmetric Clear	ASY Asymmetric Clear		TB9/16 T-Bar 9/16 Clip	SR Philips SR
0.5 FRDRP 0.5" Frosted Drop Lens	BATWING Batwing		TB15/16 T-Bar 15/16 Clip	ELDO .1% ELDO (347 only)
1.5 FRDRP 1.5" Frosted Drop Lens			- For threaded rod, please specify length	DALI 1-10 5%)
LVR Louver Lens				

--	--	--	--	--


Controls	Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Finish
N None	1 1 Circuit	N None	5 WIRE 5 Wire (std)	CL Clear	Length(Ft)	WH White
Optional	2 2 Circuits	Optional	Optional	Optional		GRY Grey
DMX		10kV 10kV Surge Protection	N 5 Leads	B Black		BLK Black
SNS Philips SNS 300 w/BLD & Daylight		EM Emergency Battery	6 WIRE 6 Wire - Cable	W White		CU Custom
CLM Encelium CLM		+GTD Generator Transfer Device	(EM - emergency battery option)			- Consult factory for custom finishes
LG LG Dongle		Note: - For Emergency Battery (EM), minimum length is 4' (direct distribution), 6' (indirect distribution)				
BT Bluetooth Mesh						
EN Enlighted Integral						

--	--	--	--	--	--	--


LED

L90>70,000
 Samsung 301 3-Step MacAdam Binning
 4000K 120 Lm/W
 3500K 98%
 3000K 96%
 90 CRI 85%


Lens Options - Direct Distribution




Standard
Frosted Flat




Frosted
0.25" Regressed



Asymmetric
Clear




0.5" Drop Lens




1.5" Drop Lens


Lens Options - Indirect Distribution



Standard
Frosted







Asymmetric



Batwing


Dimensions




2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"

Actual Length = NOMINAL +.2"

Mounting Options

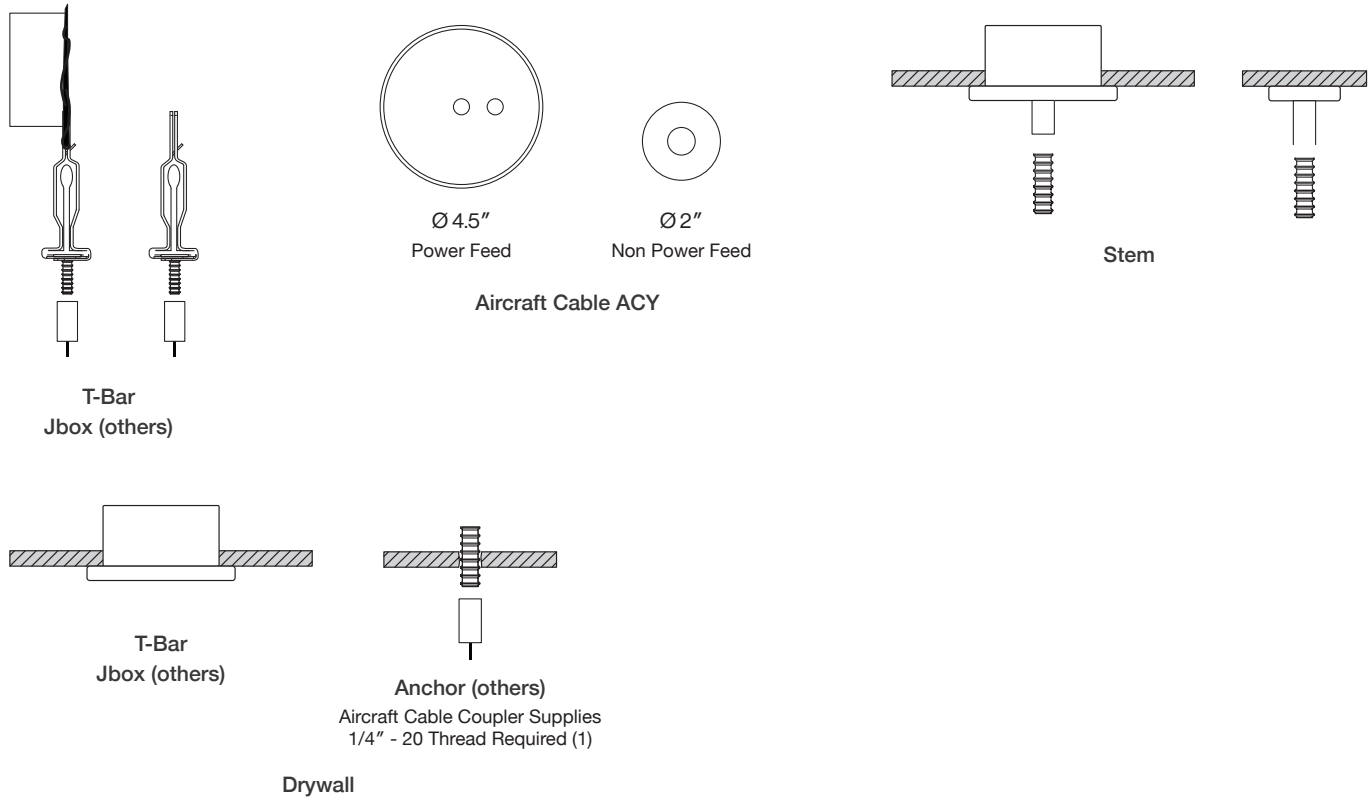


Mounting Locations

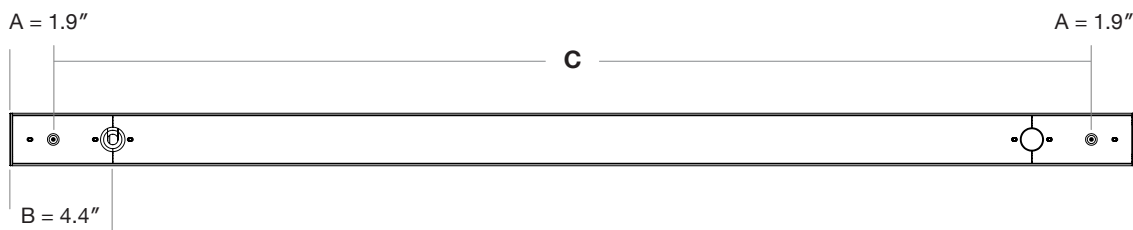

Model	Lengths - C
DTL 2	20.5"
DTL 3	32.5"
DTL 4	44.5"
DTL 5	56.5"
DTL 6	68.5"
DTL 7	80.5"
DTL 8	92.5"


Finish Options




Ash Wood
ZX159




Wash Oak
W373




Maple Wood
W17



Antique Wood
W274




**Herringbone -
Fabric**
RF007




Black Marble
NS804



White Marble
NS895




Grey Marble
PM007




Granite
NS120



Aluminum
NS120




Metal Grey
RM001



Gold Crack
PZ05

Additional Finishes Available - *Please contact factory*

Canopy Finish Options



Signal White
RAL 9003



Telegrey 2
RAL 7046



Signal Black
RAL 9004

Additional Finishes Available - *Please contact factory*