

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_

## Zip

### Suspended | Surface

LED linear strip light. 2', 4, and 8' length options. Pendant and surface mounting options. Polycarbonate and acrylic lens options. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Dry and damp rated.

DLC Listed  
cULus Listed

Designed and manufactured in North America  
5 Year Warranty



### Ordering Options

Sample Configuration: ZIP - 8 - 60 - 80 - 4K - U - FR - WH - V - BFC - N

| Model | Length | Watts                   | CRI | Color Temp | Voltage    | Lens                         | Finish   |
|-------|--------|-------------------------|-----|------------|------------|------------------------------|----------|
| ZIP   | 2      | 20, 30                  | 80  | 3K 3000K   | U 120/277V | FR Frosted                   | WH White |
|       | 4      | 20, 30, 40, 60, 80, 100 | 90  | 35K 3500K  | H 347V     |                              |          |
|       | 8      | 40, 60, 80, 100, 120    |     | 4K 4000K   |            | Optional                     |          |
|       |        |                         |     | 5K 5000K   |            | CL Clear<br>PC Polycarbonate |          |

ZIP        WH

#### Mounting

V V Hooks  
SU Surface

#### Optional

CR Continuous Run

#### Wiring

BFC Black Flexible Cord  
WFC White Flexible Cord  
IN Internal

#### Accessories

N None

#### Optional

OCC Occupancy Sensor (on/off)  
10kV 10kV Surge Protection  
WG Wire Guard  
RFL Reflector  
EM Emergency Driver Integral Programmable  
MICRO Microwave Sensor -External (with BLD and Daylight Harvesting options)

Note: For custom configurations please contact factory

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

## Features & Specifications

|                        |                                                                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Efficacy:              | Zip 2: Up to 142 Lm/W   Zip 4: Up to 155 Lm/W   Zip 8: Up to 158 Lm/W                                                                                    |
| CRI:                   | 80   90                                                                                                                                                  |
| Color Temperature:     | 3000K, 3500K, 4000K, 5000K                                                                                                                               |
| Lumen Maintenance:     | 200,000+ Life Hours (L70)                                                                                                                                |
| Voltage:               | 120/277V   347V                                                                                                                                          |
| Operating Temperature: | -35°C to +45°C   -31°F to +113°F                                                                                                                         |
| Controls:              | 0-10V Dimming                                                                                                                                            |
| Mounting:              | V Hook, Surface Mount                                                                                                                                    |
| Accessories:           | Occupancy Sensor(on/off), Ultrasonic BLD Sensor, Integral Programmable Microwave Sensor, Emergency Battery, 10kV Surge Protection, Wire Guard, Reflector |

## Output Performance at 4K


| Model     | Watts | Lm/W   | Delivered Lumens |
|-----------|-------|--------|------------------|
| Zip 2 20  | 20.63 | 141.88 | 2,927            |
| Zip 2 30  | 30.95 | 141.87 | 4,391            |
| Model     | Watts | Lm/W   | Delivered Lumens |
| Zip 4 20  | 18.90 | 150.26 | 2,840            |
| Zip 4 30  | 29.08 | 153.30 | 4,458            |
| Zip 4 40  | 39.26 | 154.74 | 6,075            |
| Zip 4 60  | 59.14 | 152.96 | 9,046            |
| Zip 4 80  | 79.26 | 153.28 | 12,149           |
| Zip 4 100 | 99.20 | 153.74 | 15,251           |

Note: Zip 4 100 - 120/277V Only

| Model     | Watts  | Lm/W   | Delivered Lumens |
|-----------|--------|--------|------------------|
| Zip 8 40  | 39.26  | 157.62 | 6,188            |
| Zip 8 60  | 59.24  | 155.09 | 9,172            |
| Zip 8 80  | 79.26  | 154.67 | 12,259           |
| Zip 8 100 | 99.38  | 154.42 | 15,346           |
| Zip 8 120 | 119.26 | 154.42 | 18,416           |

Note: Zip 8 100 - 120/277V Only


## Dimensions

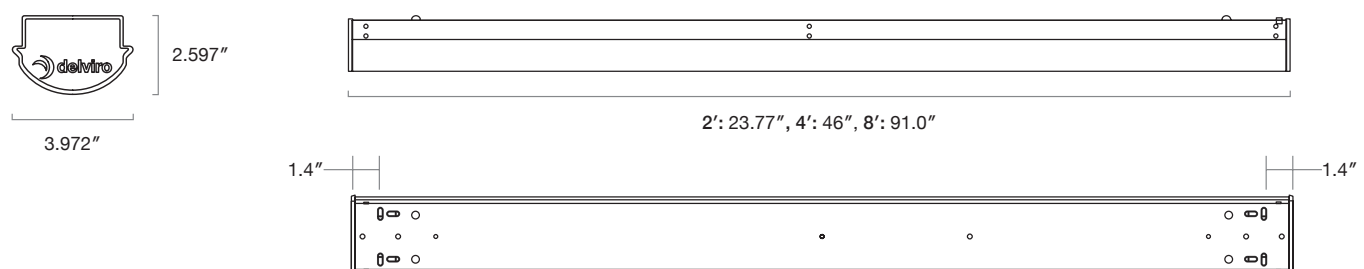

## Reflector Option



## Photometrics

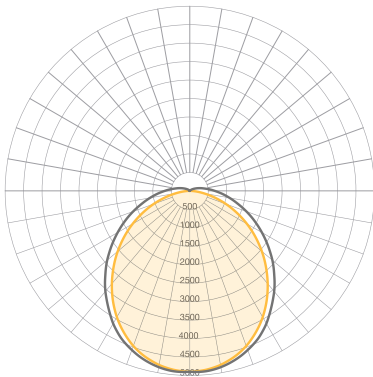

Zip 4 100 3K  
Frosted Lens

### ZONAL LUMEN SUMMARY

| Zone       | Lumens | % of Fixture |
|------------|--------|--------------|
| 0° - 30°   | 3781   | 26%          |
| 0° - 60°   | 10647  | 73%          |
| 0° - 90°   | 14099  | 96%          |
| 90° - 120° | 523    | 4%           |
| 90° - 150° | 565    | 4%           |
| 90° - 180° | 565    | 4%           |
| 0° - 180°  | 14665  | 100%         |
| 20° - 50°  | 6713   | 46%          |

### ZONAL LUMEN SUMMARY

| Zone        | Lumens |
|-------------|--------|
| 0° - 10°    | 471    |
| 10° - 20°   | 1325   |
| 20° - 30°   | 1986   |
| 30° - 40°   | 2344   |
| 40° - 50°   | 2384   |
| 50° - 60°   | 2138   |
| 60° - 70°   | 1682   |
| 70° - 80°   | 1132   |
| 80° - 90°   | 638    |
| 90° - 100°  | 313    |
| 100° - 110° | 147    |
| 110° - 120° | 63     |
| 120° - 130° | 26     |
| 130° - 140° | 11     |
| 140° - 150° | 4      |
| 150° - 160° | 1      |
| 160° - 170° | 0      |
| 170° - 180° | 0      |