

Fixture: \_\_\_\_\_ QTY: \_\_\_\_\_ Project : \_\_\_\_\_


# Thinline Spot Linear

## Direct | Direct/Indirect

Architectural luminaire. Contemporary and minimal design. Aluminum extruded body. Pendant mounting. Cast end caps with light block. Spot lights at start, middle, and end positions. Spot light driver 0-10V dimming. Direct and direct-indirect distribution. Universal 120/277 voltage. 4.5" wide. 2' - 8' Lengths. Dry and damp rated.

cULus Listed

Designed and manufactured in North America  
5 Year Warranty

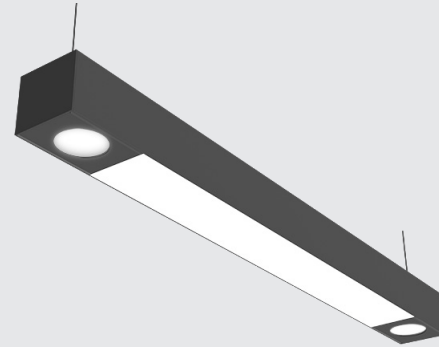

### Performance

**LED:** 4000K - 120 Lm/W | 3500K - 116 Lm/W | 3000K - 112 Lm/W

**SPOTS:** 4000K - 166 Lm/W | 3500K - 165 Lm/W | 3000K - 161 Lm/W

### Ordering Options

**Sample Configuration:** DTL SPL SD 8 - 10W - SME - D 500 - I 500 - 80 - 4K - M - FR - FR - WH - AC - DIMOFF - N - 1 - N - 5WIRE - CL - 10 - WH

Model	Lengths (Ft)	Watts (Spot)	Spots (Position)	Direct Lm/ft	Indirect Lm/ft	CRI	Color Temp
DTL SPL SD	2' - 8'	10W	SE Start, End	D 250	I 250	80	27K 2700K
DTL SPL SDI	(1' increments)	15W	SME Start, Middle, End	D 500	I 500	90	3K 3000K
<i>SD - Suspended Direct</i>			<b>Note:</b> - SME for	D 750	I 750		35K 3500K
<i>SDI - Suspended Dir-Ind</i>			6' - 8' Lengths only	D 1000	I 1000		4K 4000K
				D _____ (custom up to 1200)	I _____ (custom up to 1200)		5K 5000K

--	--	--	--	--	--	--	--

Spot Reflector	Direct Lens	Indirect Lens	Finish	Mounting	Driver - Linear
<b>N</b> Narrow - 20° <b>M</b> Medium - 30° <b>W</b> Wide - 50°	<b>FR</b> Frosted Flat	<b>FR</b> Frosted  <i>Optional</i> <b>ASY</b> Asymmetric Clear <b>BW</b> Batwing	<b>WH</b> White <b>BLK</b> Black <b>GRY</b> Grey <b>CU</b> Custom  <i>- For custom finishes please specify RAL number</i> <i>- See Finish Options</i>	<b>AC</b> Aircraft Cable 10' (Std)  <i>Optional</i> <b>TR</b> Threaded Rod <b>TB9/16</b> T-Bar 9/16 Clip <b>TB15/16</b> T-Bar 15/16 Clip  <i>- For threaded rod, please specify length</i>	<b>DIMOFF</b> 0-10V DIMOFF  <i>Optional</i> <b>DALI</b> Digital Addressable Lighting Interface <b>LUTRON</b> Lutron Ecosystem <b>SR</b> Philips SR <b>ELDO</b> .1% ELDO (347 only 1-10 5%)

	<b>FR</b>				
--	-----------	--	--	--	--

Controls	Circuits	Accessories	Wiring	Wire Color	Wire Length	Canopy Finish
<b>N</b> None  <i>Optional</i> <b>DMX</b> Digital Multiplex <b>SNS</b> Philips SNS 300 w/BLD & Daylight <b>CLM</b> Encelium CLM <b>LG</b> LG Dongle <b>BT</b> Bluetooth Mesh <b>EN</b> Enlighted Integral	<b>1</b> 1 Circuit <b>2</b> 2 Circuits	<b>N</b> None  <i>Optional</i> <b>10kV</b> 10kV Surge Protection <b>EM</b> Emergency Battery <b>+GTD</b> Generator Transfer Device  <b>Note:</b> - For Emergency Battery (EM), minimum length is 4' (direct distribution), 6' (indirect distribution)	<b>5 WIRE</b> 5 Wire (Std)  <i>Optional</i> <b>N</b> 5 Leads <b>6 WIRE</b> 6 Wire - Cable (EM - emergency battery option)	<b>CL</b> Clear  <i>Optional</i> <b>B</b> Black <b>W</b> White	<b>Length(Ft)</b> 6ft (std)	<b>WH</b> White <b>BLK</b> Black <b>CU</b> Custom  <i>- For custom finishes please specify RAL number</i> <i>- See Finish Options</i>

--	--	--	--	--	--	--

## LED

L90>70,000

Samsung 301 3-Step MacAdam Binning

4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%

## Output Performance - Spotlight


Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 10	11.4	2700K	80	151	1,732
	11.4	3000K	80	161	1,840
	11.4	3500K	80	165	1,883
	11.4	4000K	80	166	1,894
	11.4	5000K	80	167	1,916
Model	Watts	CCT	CRI	Lm/W	Delivered Lumens
DEL SPL 15	16.3	2700K	80	151	2,474
	16.3	3000K	80	161	2,628
	16.3	3500K	80	165	2,690
	16.3	4000K	80	166	2,706
	16.3	5000K	80	167	2,737

## Lens Options - Direct Distribution




Frosted Flat


## Lens Options - Indirect Distribution



Standard  
Frosted




Asymmetric




Batwing


Spot Beam

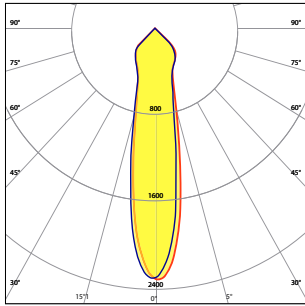

20° Spot Beam

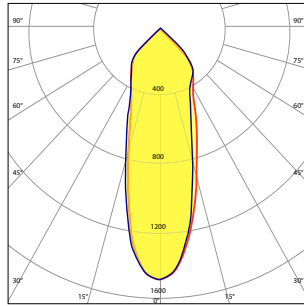


30° Medium Beam

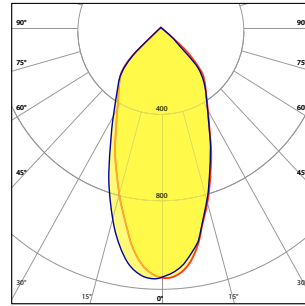


50° Wide Beam



Dimensions

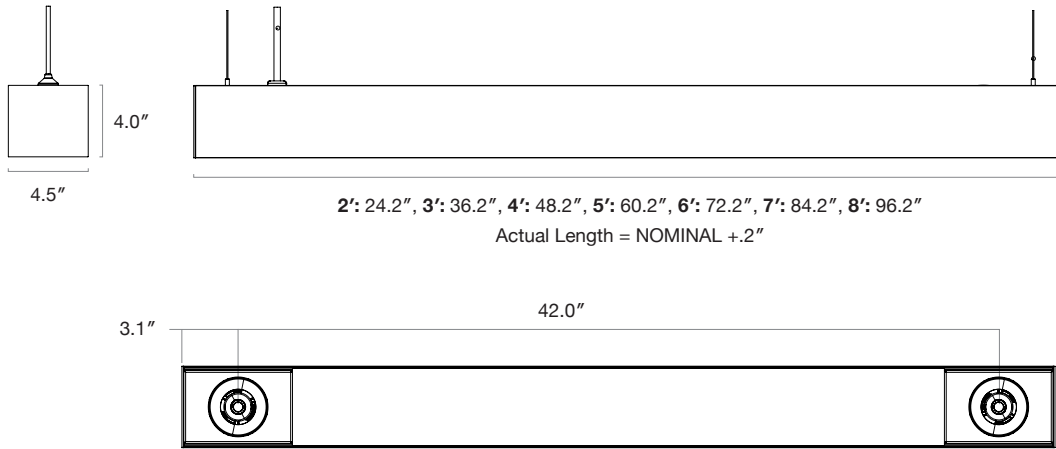


Spot Light Locations  
6' - 8' Models

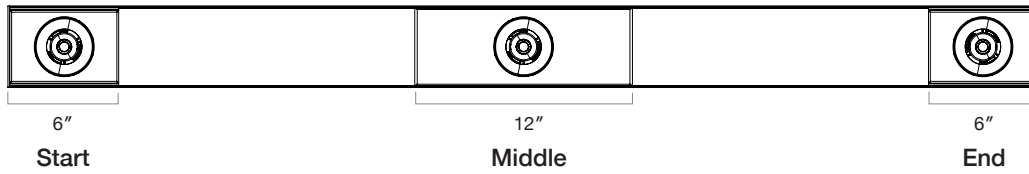

### Mounting Options

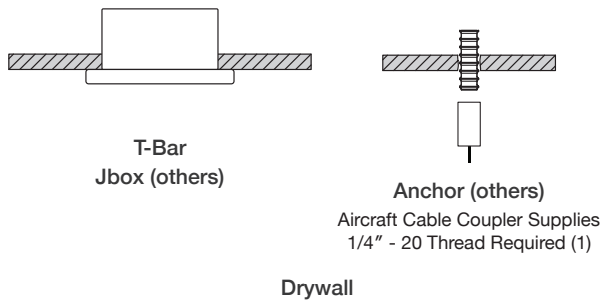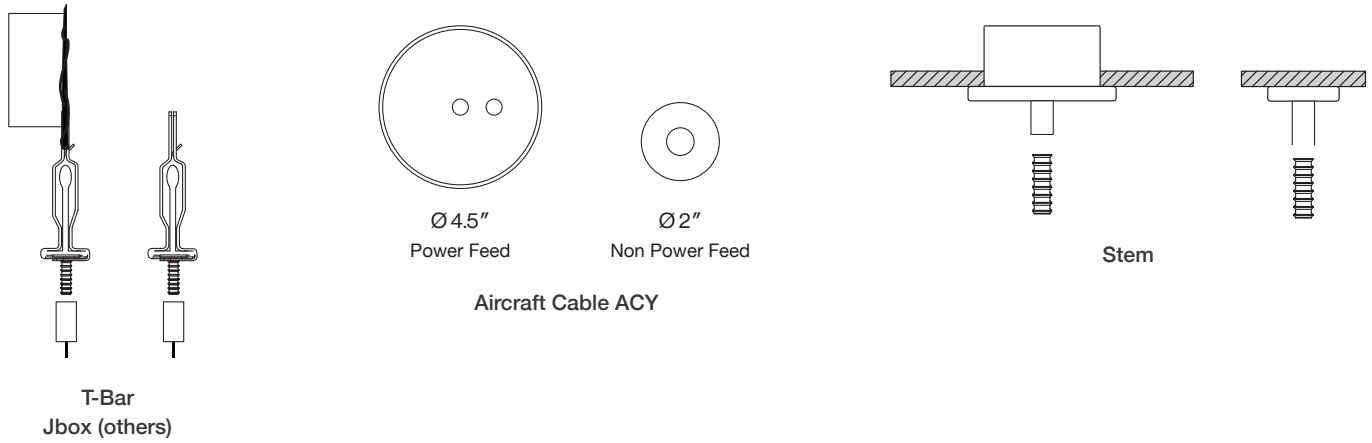


### Mounting Locations

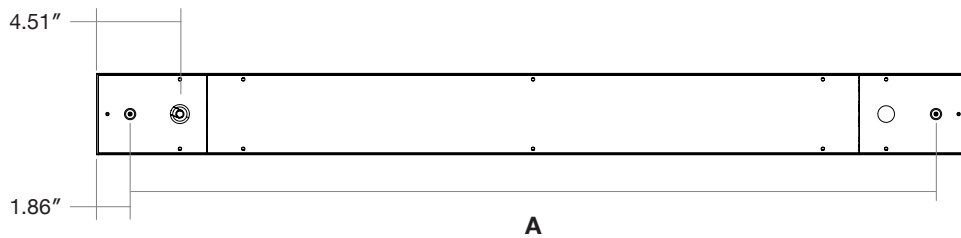

Model	Lengths - A
DTL 2	20.5"
DTL 3	32.5"
DTL 4	44.5"
DTL 5	56.5"
DTL 6	68.5"
DTL 7	80.5"
DTL 8	92.5"

## Finish Options

### Standard RAL Finishes



**Signal White**  
RAL 9003




**Telegrey 2**  
RAL 7046




**Signal Black**  
RAL 9004


### Sample Custom RAL Finishes




**Traffic White**  
RAL 9016



**Papyrus White**  
RAL 9018



**Graphic Grey**  
RAL 7024



**Light Grey**  
RAL 7035



**Jet Black**  
RAL 9005



**Graphic Black**  
RAL 9011



**Azure Blue**  
RAL 5009



**Gentian Blue**  
RAL 5010



**Sky Blue**  
RAL 5015



**Pastel Orange**  
RAL 2003




**Pure Orange**  
RAL 2004



**Daffodil Yellow**  
RAL 1007




**Lemon Yellow**  
RAL 1012



**Zinc Yellow**  
RAL 1018




**Coral Red**  
RAL 3016



**Rose**  
RAL 3017



**Traffic Red**  
RAL 3020



**Salmon Pink**  
RAL 3022




**Olive Green**  
RAL 6003



**Moss Green**  
RA 6005



**Grass Green**  
RAL 6010



**Claret Violet**  
RAL 4004



**Traffic Purple**  
RAL 4006




**Pearl Blackberry**  
RAL 4012




**Beige**  
RAL 1001



**Nut Brown**  
RAL 8011



**Sepia Brown**  
RAL 8014



**Mahogany Brown**  
RAL 8016

Custom Finishes - Please contact factory  
Additional Finishes Available - Please contact factory