

Fixture: \_\_\_\_\_ Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

## Lite Up | EcoCTC

### Linear Ambient High Bay

Contemporary style. Cutting edge design. Commercial and retail applications. Linear ambient direct-indirect high bay lighting. White finish. 4' and 8' length options. Dry and damp rated.

Designed and manufactured in North America.



## Specifications

### Construction

Aluminum Body

### Efficacy

4': Up to 150 Lm/W

8': Up to 151 Lm/W

### Watts

4': 60W, 70W

8': 80W, 120W, 160W

### CRI

80 | 90

### Color Temperature

3000K, 3500K, 4000K, 5000K

### Lumen Maintenance

200,000+ Life Hours (L70)

### Voltage

120/277V, 347V

### Controls

Silvair

### Operating Temperature

-20°C to +45°C | -4°F to +113°F

### Dimensions

4': 10.936"W x 6.853"W x 46.08"L

8': 10.936"W x 6.853"W x 90.75"L

### Mounting

Aircraft Cable

### Wiring

White Flexible Cord 12'

### Finish

White

### Accessories

0-10V DIMOFF

Emergency Battery

### Certification

DLC Premium

cULus

### Warranty

5-Year Warranty




Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

## Output Performance

Model	Length	CCT	Watts	Lm/W	Delivered Lumens
ECOCTC4500 60	4	4000K	62.44	150.05	9369
ECOCTC4500 70	4	4000K	70	142.85	10000
ECOCTC811000 80	8	4000K	83	126.51	10500
ECOCTC811000 120	8	4000K	124.17	151.46	18807
ECOCTC811000 160	8	4000K	156.81	147.00	23051

## Dimensions

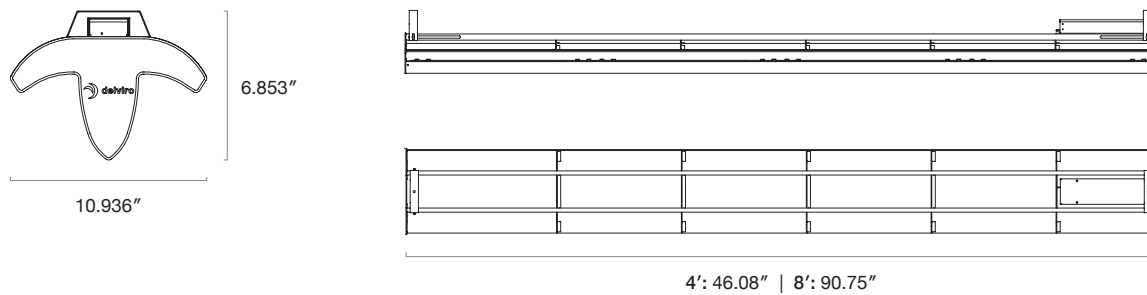

## Ordering Options

Sample Configuration: ECOCTC4550 - 70 - 80 - 4K - U - WH - IND - AC - WFC12 - N - N

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	
Model		Watts		CRI		Color Temp		Voltage		WH		IND		AC		WFC12	
										Finish		Orientation		Mounting		Wiring	Accessories

Controls

Model	Watts	CRI	Color Temp	Voltage	Finish	Orientation	Mounting
ECOCTC4550	60, 70	80	3K - 3000K	U - 120/277V	WH - White	IND - Indirect	AC - Aircraft Cable
ECOCTC81100	80, 120, 160	90	35K - 3500K 4K - 4000K 5K - 5000K	H - 347V			

Wiring	Accessories	Controls
WFC12 - White Flexible Cord 12'	N - None <i>Optional</i> DIMOFF - 0-10V DIMOFF EM - Emergency Battery	N - None <i>Optional</i> SIL - Sil vair