

Fixture: _____ Quantity: _____

Project: _____

Troffer 2x4 Retrofit Kit

2x4 LED troffer retrofit. 18 gauge aluminum. Easy installation with little maintenance. High gloss white finish.

Offices, conference rooms, corridors, classrooms, hallways, cafeterias, retail, and general floor lighting applications. Dry and damp rated.

Designed and manufactured in North America.



Specifications

Construction

Aluminum Housing

Efficacy

Up to 117 Lm/W

Watts

30W, 40W, 60W, 80W, 120W

CRI

80 | 90

Color Temperature

3000K, 3500K, 4000K, 5000K

Lumen Maintenance

150,000+ Life Hours (L70)

Voltage

120/277V, 347V

Operating Temperature

-40°C to +40°C
-40°F to +104°F

Dimensions

12"W x 44.88"L

Mounting

Retrofit

Finish

White

Certification

DLC
cETLus

Warranty

5-Year Warranty

Output Performance


Model	Watts	Lm/W	Delivered Lumens
TRFT2 2x4 30	27.9	117.1	3270
TRFT2 2x4 40	38.2	116.4	4446
TRFT2 2x2 60	57.6	110.3	6361
TRFT2 2x2 80	77.9	106.2	8276
TRFT2 2x2 120	120	110	13200



Intertek

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Dimensions

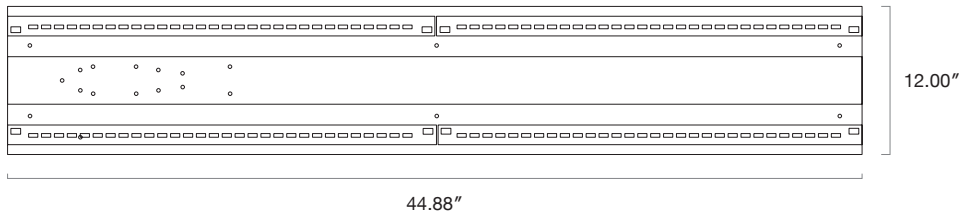

Ordering Options

Sample Configuration: TRFT2 - 2x4 - 30 - 80 - 4K - U - WH - RT



Model	Watts	CRI	Color Temp	Voltage	Finish	Mounting
TRFT2 2x4	15	80	3K - 3000K	U - 120/277V	WH - White	RT - Retrofit
	20	90	35K - 3500K	H - 347V		
	30		4K - 4000K			
	40		5K - 5000K			
	60					

Note: For custom configurations please contact factory.