

Fixture: _____ QTY: _____

Project: _____


Thinline Acoustic

Wall Mount Direct, Direct/Indirect, Indirect

Our wall mounted acoustic light fixture combines the best of lighting and sound absorption technology.

Our innovative lighting solution not only illuminates your environment with brilliant LED light but also enhances the acoustics of the room, creating an environment that is both visually stunning and acoustically pleasing.

Designed and Manufactured in North America.

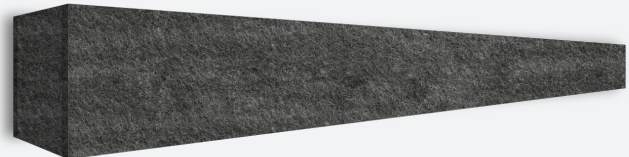


Model: Thinline 4.5


Specifications

LED	Samsung 301 3-Step MacAdam Binning L90>70,000 4000K - 120 Lm/W 3500K - 96% 3000K - 90%	Driver	0-10 DIMOFF Optional: DALI, Lutron, Philips SR, ELDO
CRI	80, 90	Control Options	DMX, Philips SNS 300, Encelium CLM, LG Dongle, Bluetooth Mesh, Enlighted Integral
Lumens/Ft	250Lm, 500Lm, 750Lm, 1000Lm (custom up to 1200Lm)	Circuits	1 and 2
Color Temp	2700K, 3000K, 3500K, 4000K, 5000K	Accessories	10kV Surge Protection, Emergency Battery, Generator Transfer Device
Voltage	120/277, 347V	Wiring	5 Leads Optional: 5 Wire, 6 Wire (cable, emergency battery option)
Construction	Aluminum extruded with cast end caps	Felt	Rigid Panels - 9.5mm 0.37" Thick 1500 GSM (44 opsy) 60% Recycled PET Fiber 35 Vibrant Colors
Dimensions	Widths: 2.25", 3.18", 4.5" Lengths: 2 - 8' Continuous Run: Min 2' (1' increments, 6" available)	Certifications	DLC Listed cULus Dry and Damp Rated
Mounting	Wall Mounted Bracket Optional: 12" Extended Wall Mounted Arm	Warranty	5-Year Warranty
Lens Direct	Frosted Flat Optional: Frosted Regressed, Asymmetric 0.5" Drop Lens, 1" Drop Lens, Louver		
Lens Indirect	Frosted Flat Optional: Asymmetric, Batwing		


Lens Options - Direct Distribution




Standard
Frosted Flat




Frosted
0.25" Regressed



Asymmetric
Clear




0.5" Drop Lens




1.5" Drop Lens

Note: For 2.25 and 3.18 model widths only


Lens Options - Indirect Distribution



Standard
Frosted




Asymmetric




Batwing


Dimensions




2.25"



3.18"



4.5"




2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"

Actual Length = NOMINAL +.2"

Mounting


Wall Mount Bracket

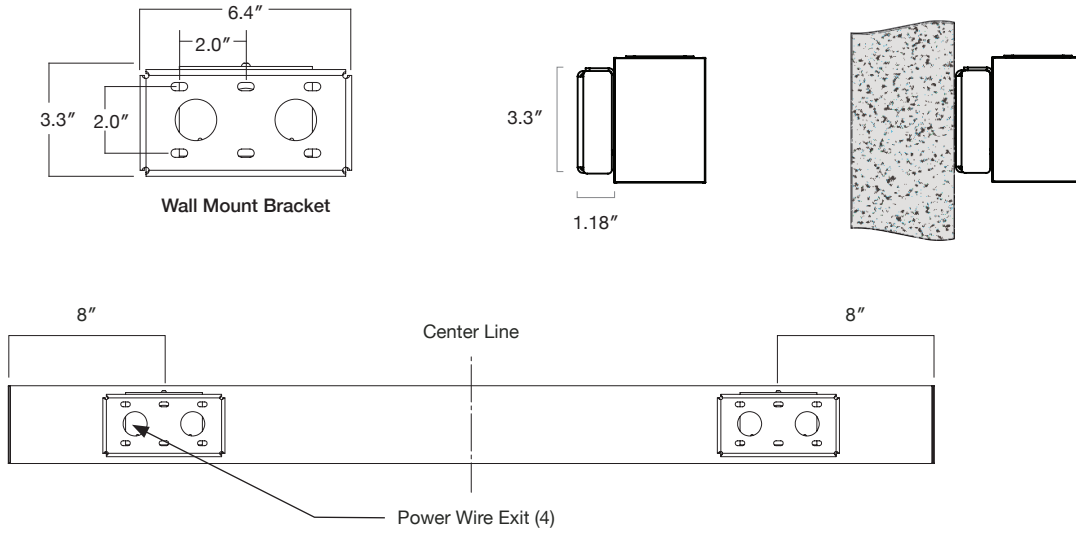

Mounting Locations

Model	Mounting Reference
DTL 2	Centerline
DTL 3	
DTL 4	8" From Fixture Ends
DTL 5	
DTL 6	
DTL 7	Centerline & 8" From Fixture Ends
DTL 8	

12" Extended Arm




Designer Felt

Color Options



Ordering Options

Sample Configuration: DTL A WM - 3.18 - 8 - D500 - I500 - 80 - 4K - U - FR - FR - DB-16 - AC - DIMOFF - N - 1 - N - N

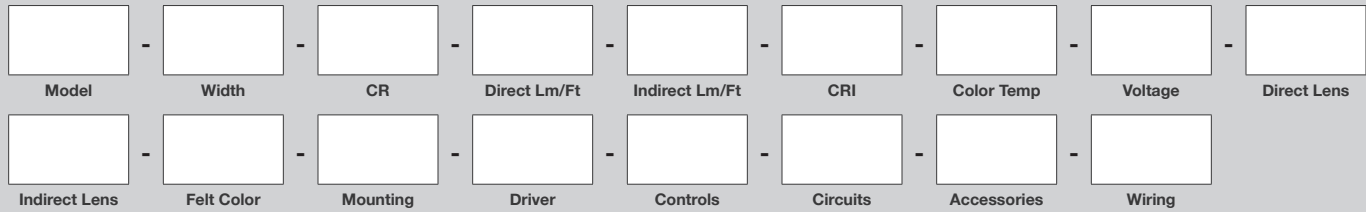

Model	Width	Continuous Run (CR)	Direct Lm/Ft	Indirect Lm/Ft	CRI
DTL A WM D	2.25	CR _____	D 250	I 250	80
DTL A WM DI	3.18	Min 2Ft (1Ft increments, Unibody up to 8Ft)	D 500	I 500	90
DTL A WM I	4.5	Optional - Available in 6-inch increments	D 750	I 750	
WM D - Wall Mount Direct			D 1000	I 1000	
WM DI - Wall Mount Direct-Indirect			D____ (custom up to 1200)	I____ (custom up to 1200)	
WM I - Wall Mount Indirect					
Color Temp	Voltage	Direct Lens	Indirect Lens	Felt Color	Mounting
27K - 2700K	U - 120/277V	FR - Frosted Flat	FR - Frosted	Color Code #____	WM - Wall Mount Bracket
3K - 3000K	H - 347V	Optional	Optional	- Please see color options	Optional
35K - 3500K		FFREG - Frosted Regressed	ASY - Asymmetric		12EX - 12" Extended Wall Mounted Arm
4K - 4000K		ASY - Asymmetric Clear	BATWING - Batwing		
5K - 5000K		0.5 FRDRP - 0.5" Frosted Drop Lens			
		1.5 FRDRP - 1" Frosted Drop Lens			
		LVR - Louver			
		Note: 1.5 Frosted Drop Lens for 2.25 and 3.18 model widths only			
Driver	Controls	Circuits	Accessories	Wiring	
DIMOFF - 0-10 DIMOFF	N - None	1 - 1 Circuit	N - None	N - 5 Leads	
Optional	Optional	2 - 2 Circuit	Optional	Optional	
DALI - Digital Addressable Lighting Interface	DMX - Digital Multiplex		10kV - 10kV Surge Protection	5 WIRE - 5 Wire	
LUTRON - Lutron Ecosystem	SNS- Philips SNS 300 w/BLD & Daylight		EM - Emergency Battery	6 WIRE - 6 Wire - Cable (EM - Emergency Battery Option)	
SR - Philips SR	CLM - Encelium CLM		+GTD - Generator Transfer Device		
ELDO - 1% ELDO (347 only 1-10 5%)	LG - LG Dongle				
	BT - Bluetooth Mesh				
	EN - Enlighted Integral				