

Date	Fixture	Project	Quantity
------	---------	---------	----------

Del Snap 2.0

Troffer

Features

- LED Troffer fixture
- Diffused acrylic lens
- Easy lay-in installation
- General ceiling light applications
- Dry and damp rated
- Designed and manufactured in North America
- 5 Year Warranty



Specifications

Construction

Steel Body
Power Coated Finish

Dimensions

1x4: 11.75"W x 4"H x 47.75"L
2x2: 19.5"W x 4"H x 23.75"L
2x4: 23.75"W x 4"H x 47.75"L
20x30: 19.75"W x 4"H x 29.75"L
20x60: 19.75"W x 4"H x 59.75"L

LED

Samsung LM281B Plus Pro, 3-Step MacAdam Binning
200,000+ Life Hours (L70)

Efficacy

130 Lm/W

Watts

1x4: 20W - 60W
2x2: 20W - 30W
2x4: 20W - 60W
20x30: 20W - 30W
20x60: 25W - 60W

Color Temperature

27000K - 5000K

CRI

80 or 90

Voltage

120/277V or 347V

Controls

0-10V Dimming down to 1%

Lens

Diffused Acrylic Lens

Mounting

T-Bar or Drywall Kit

Accessories

Occupancy Sensor (on/off)
Bi-Level Dimming (100%/10%)
10kV Surge Protection
Photo Control
Air Handling Slots

Wiring

Black or White Flexible Cord

Finishes

White - RAL 9003

Certifications

DLC
cULus

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.



Ordering Guide

Sample Configuration: DEL SNAP 2.0 - 2x2 - 30 - 80 - 4K - U - FR - WH - TBAR - IN - N

DEL SNAP 2.0						FR	WH		
Model	Size	Watts	CRI	Color Temp	Voltage	Lens	Finish	Mounting	Wiring
Accessories									

Model	Size	Watts	CRI	Color Temp	Voltage	Lens	Finish
DEL SNAP 2.0	1x4	20 - 60	80	27K - 2700K	U - 120/277V H - 347V	FR - Frosted	WH - White
	2x2	20, 25, 30	90	3K - 3000K			
	2x4	20 - 60		35K - 3500K			
	20x30	20, 25, 30		4K - 4000K			
	20x60	25 - 60		5K - 5000K			

Mounting	Wiring	Accessories		
TBAR - T-Bar <i>Optional</i> DTRK - Drywall Trim Kit	IN - Internal <i>Optional</i> BFC - Black Flexible Cord WFC - White Flexible Cord	N - None <i>Optional</i> OCC - Occupancy Sensor (on/off) EM - Emergency Battery WIFI - Wi-Fi Dimming 10kV - 10kV Surge Protection AH - Air Handling Slots		


Note: For custom configurations please contact factory

Dimensions


Del Snap 1x4



W: 11.75"
H: 4"




L: 11.75"




Del Snap 2x2



W: 19.75"
H: 4"



L: 23.75"




Del Snap 2x4



W: 23.75"
H: 4"




L: 47.75"

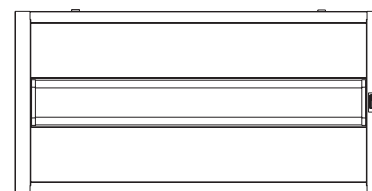


Del Snap 20x30



W: 19.75"
H: 4"



L: 29.75"




Del Snap 20x60



W: 19.75"
H: 4"



L: 59.75"

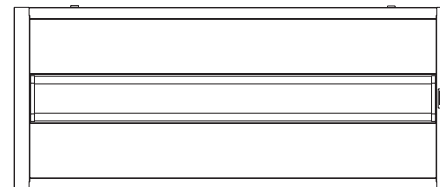


Output Performance

Model	Watts	Lm/W	Delivered Lumens
Del Snap 1x4	20	136	2704
	30	140	4306
	40	136	5423
	60	140	8600

Model	Watts	Lm/W	Delivered Lumens
Del Snap 2x4	20	136	2600
	30	136	4050
	40	136	5423
	60	135	8199

Model	Watts	Lm/W	Delivered Lumens
Del Snap 2x2	22.5	116	2625
	25	127	3180
	31.5	128	4003

Photometrics



Del Snap 2.0
2x4, 4K

ZONAL LUMEN SUMMARY

Zone	Lumens	% of Fixture
0° - 30°	1434	26%
0° - 60°	4116	76%
0° - 90°	5422	100%
90° - 120°	0	0%
90° - 150°	0	0%
90° - 180°	0	9%
0° - 180°	5422	100%
20° - 50°	2578	48%

ZONAL LUMEN SUMMARY

Zone	Lumens
0° - 10°	178
10° - 20°	502
20° - 30°	754
30° - 40°	897
40° - 50°	928
50° - 60°	857
60° - 70°	698
70° - 80°	466
80° - 90°	143
90° - 100°	0
100° - 110°	0
110° - 120°	0
120° - 130°	0
130° - 140°	0
140° - 150°	0
150° - 160°	0
160° - 170°	0
170° - 180°	0